


Level (100:3007 Hz) = 98.36 dB SPL/watt (8 ohms, @1.50 meters)

FANE M4-15LF

MLSSA: Frequency Domain

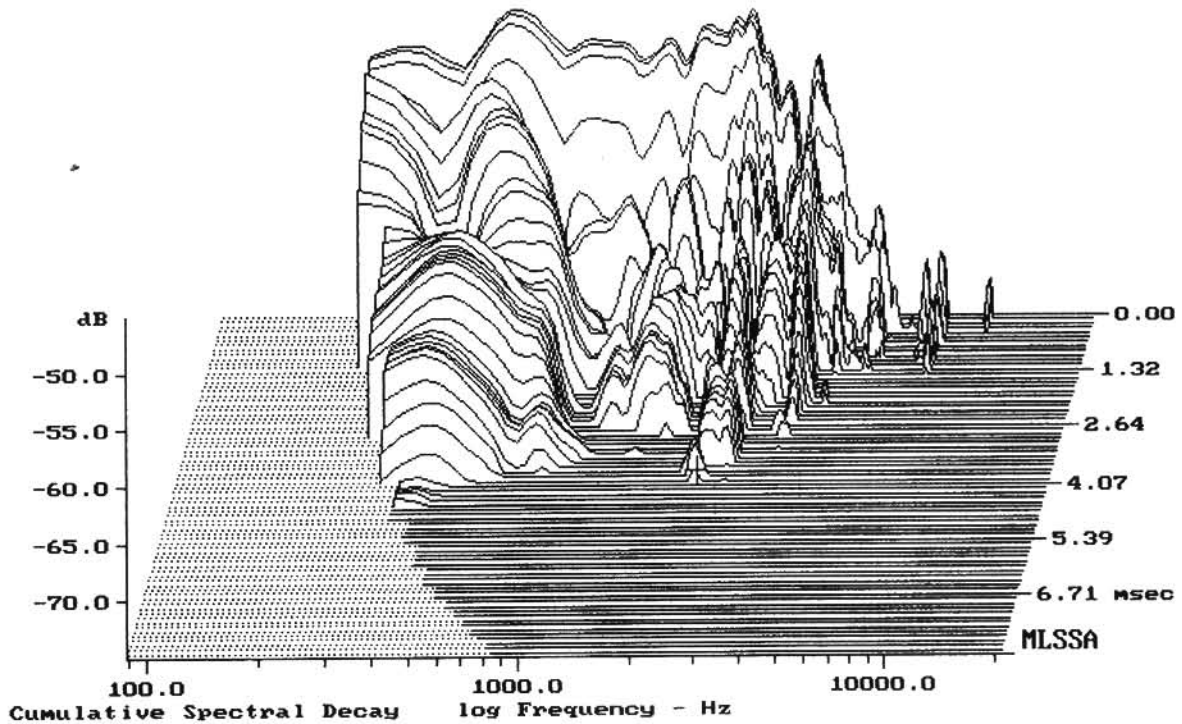

-74.07 dB, 2264 Hz (51), 3.960 msec (37)

Line	Parameter	Value	Units
1	RMSE-free	0.93	Ohms
2	Fs	55.63	Hz
3	Re	6.15	Ohms[dc]
4	Res	110.46	Ohms
5	Qms	10.81	
6	Qes	0.60	
7	Qts	0.57	
8	L1	0.61	mH
9	L2	1.99	mH
10	R2	9.65	Ohms
11	RMSE-load	0.76	Ohms
12	Vas(Sd)	141.42	liters
13	Mms	59.46	grams
14	Cms	138	$\mu\text{M}/\text{Newton}$
15	B1	14.58	Tesla-M
16	SPLref(Sd)	97.9	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (80.00 grams)

Area (Sd): 855.30 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -32.7% (-20% to -50% is recommended).

FANE M4-15LF

MLSSA: Parameters

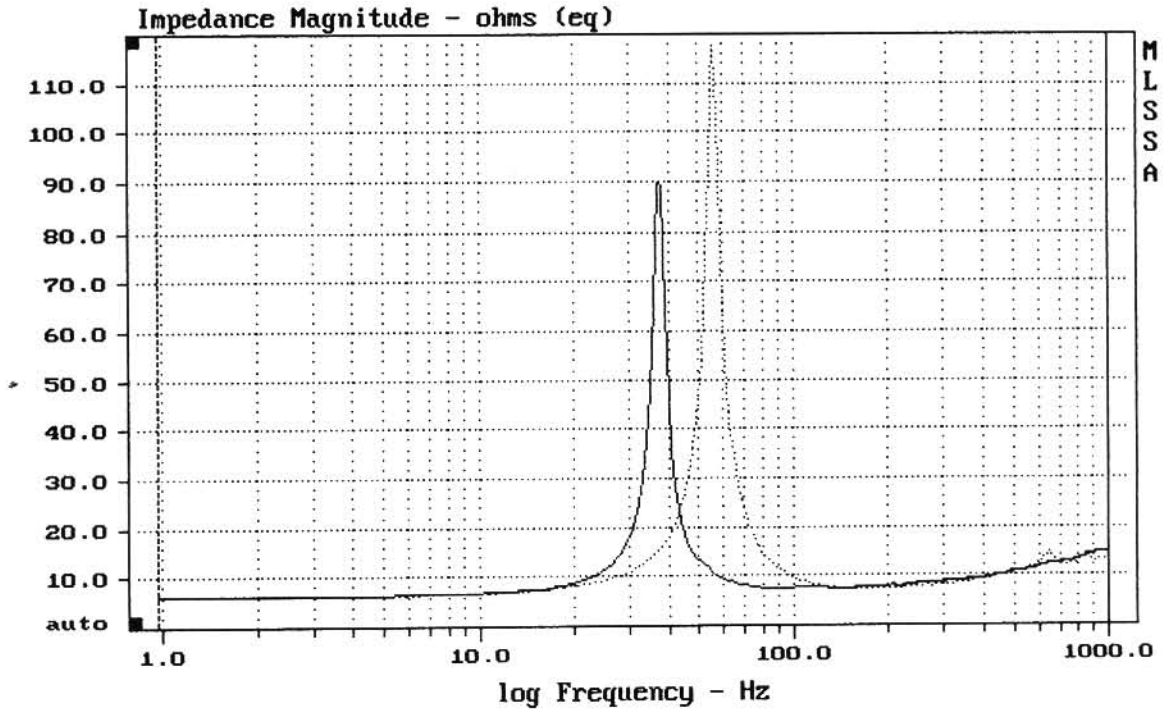

mean: 12.12, rms: 14.89, std: 8.646, max: 117.7, min: 6.217

DTTO

MLSSA: Frequency Domain