

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.78	Ohms
2	Fs	64.28	Hz
3	Re	6.34	Ohms[dc]
4	Res	106.21	Ohms
5	Qms	6.83	
6	Qes	0.41	
7	Qts	0.39	
8	L1	0.10	mH
9	L2	1.73	mH
10	R2	7.60	Ohms
11	RMSE-load	1.96	Ohms
12	Vas(Sd)	145.61	liters
13	Mms	43.26	grams
14	Cms	142	$\mu\text{M}/\text{Newton}$
15	B1	16.48	Tesla-M
16	SPLref(Sd)	101.6	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (80.00 grams)

Area (Sd): 855.30 sq cm


DCR mode: Measure (-0.06 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -39.4% (-20% to -50% is recommended).


FANE AX 15.300BASS

MLSSA: Parameters

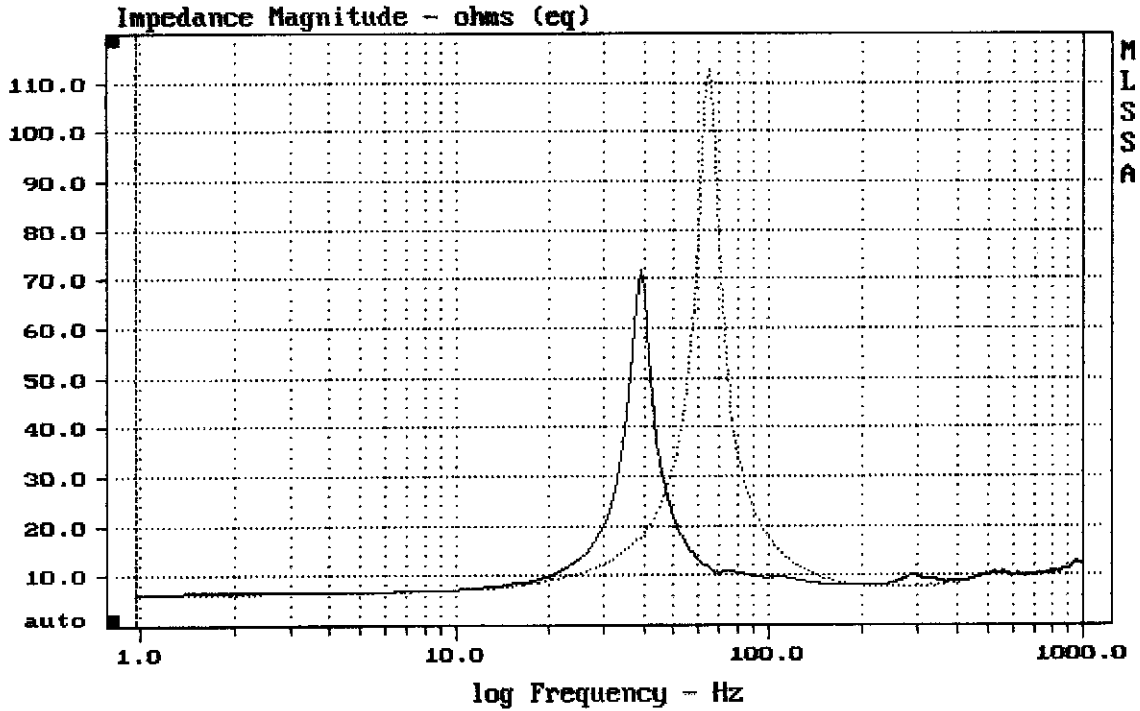

mean: 12.06, rms: 16.29, std: 10.95, max: 112.7, min: 6.401


MLSSA: Frequency Domain

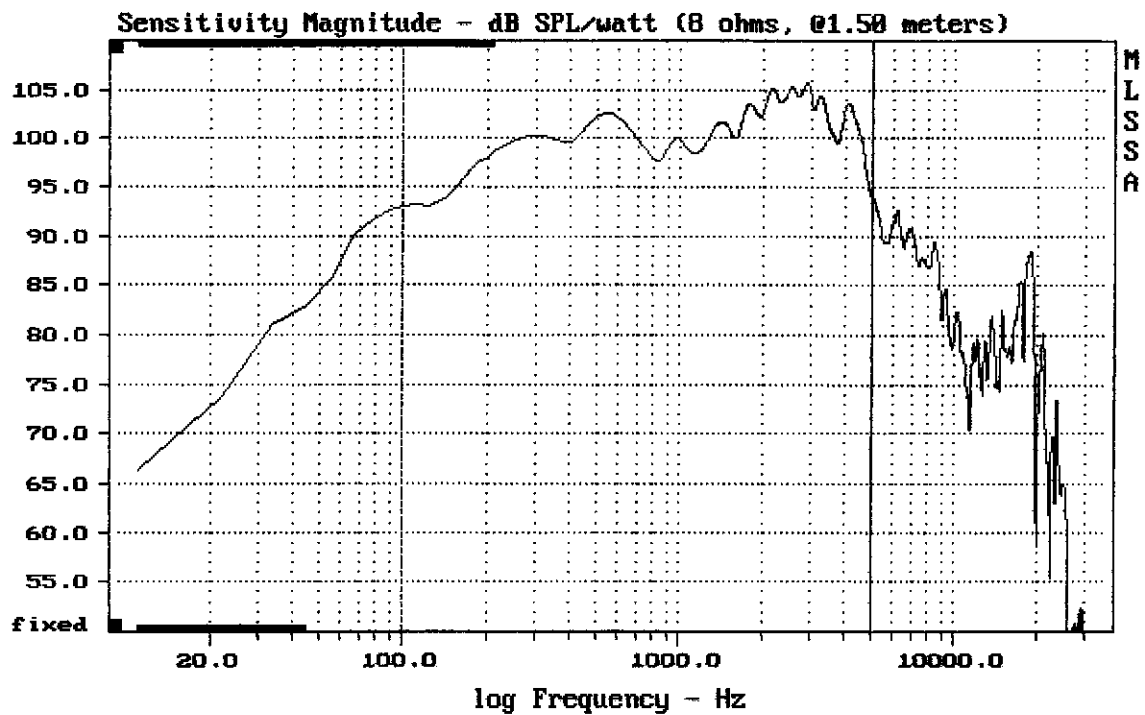

Level (100:5005 Hz) = 100.80 dB SPL/watt (8 ohms, @1.50 meters)

FANE AX15.300BASS

MLSSA: Frequency Domain

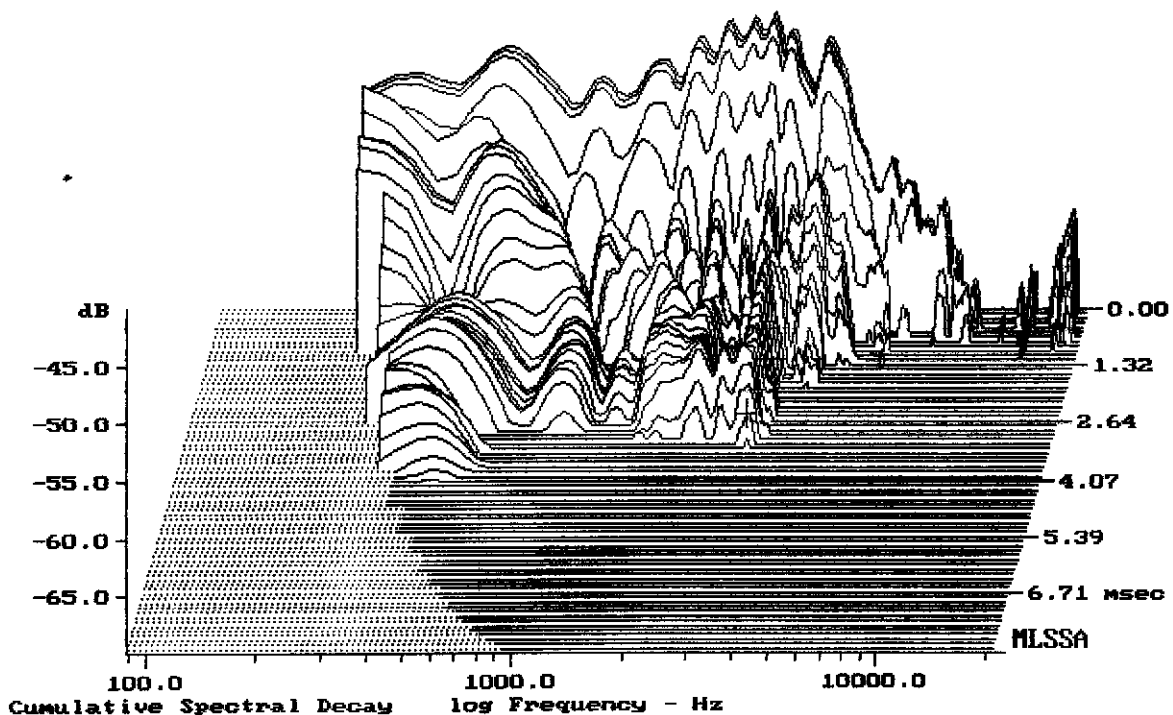

-67.29 dB, 3063 Hz (69), 3.190 msec (30)