

| Line | Parameter | Value | Units |
|------|------------|--------|----------------|
| 1 | RMSE-free | 0.38 | Ohms |
| 2 | Fs | 46.80 | Hz |
| 3 | Re | 6.39 | Ohms[dc] |
| 4 | Res | 79.15 | Ohms |
| 5 | Qms | 6.91 | |
| 6 | Qes | 0.56 | |
| 7 | Qts | 0.52 | |
| 8 | L1 | 0.42 | mH |
| 9 | L2 | 1.46 | mH |
| 10 | R2 | 6.73 | Ohms |
| 11 | RMSE-load | 0.68 | Ohms |
| 12 | Vas(Sd) | 236.55 | liters |
| 13 | Mms | 53.35 | grams |
| 14 | Cms | 217 | μ M/Newton |
| 15 | B1 | 13.40 | Tesla-M |
| 16 | SPLref(Sd) | 98.2 | dB[Re] |
| 17 | Rub-index | 0.00 | |

Method: Mass-loaded (80.00 grams)

Area (Sd): 881.41 sq cm


DCR mode: Measure (-0.06 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -35.6% (-20% to -50% is recommended).


FANE M4-15

MLSSA: Parameters

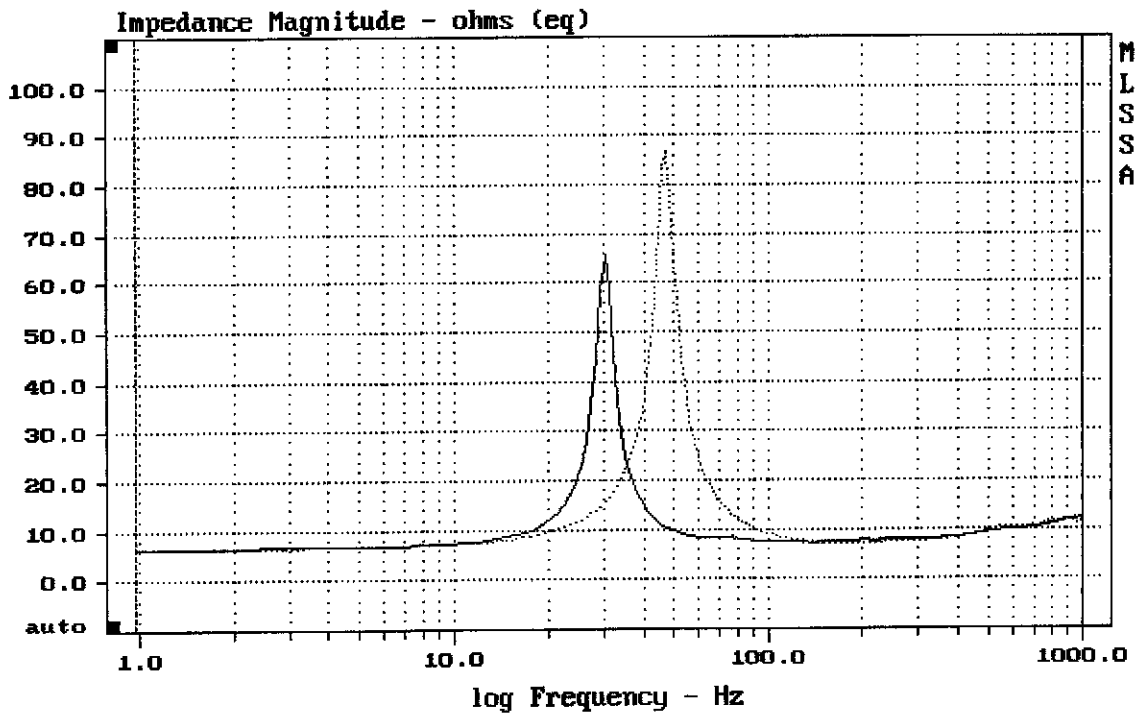

mean: 10.67, rms: 12.71, std: 6.918, max: 86.63, min: 6.458


MLSSA: Frequency Domain

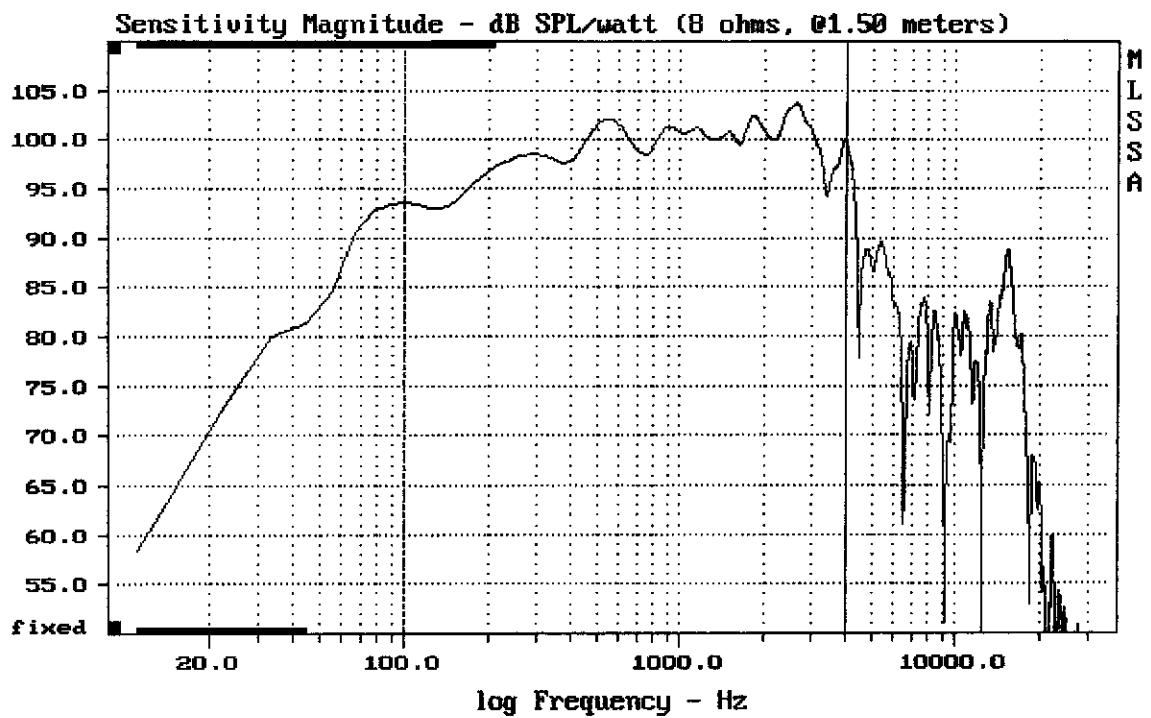

Level (100:4006 Hz) = 99.48 dB SPL/watt (8 ohms, @1.50 meters)

FANE M4-15

MLSSA: Frequency Domain

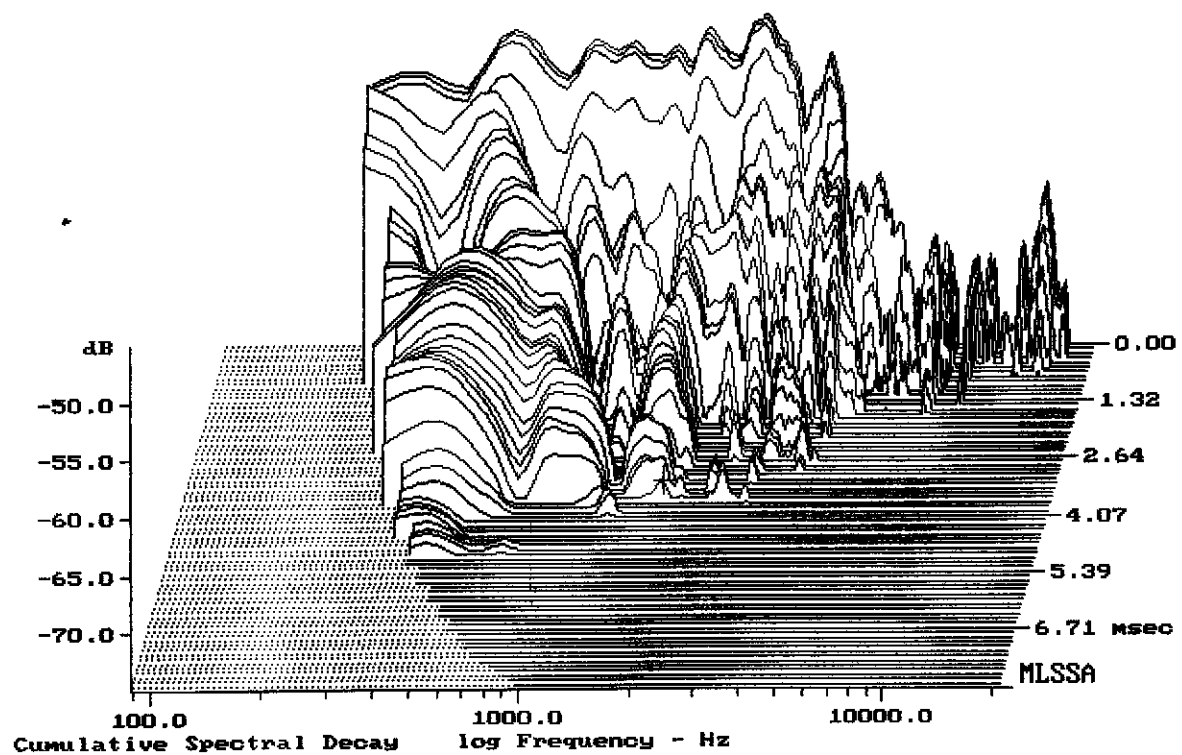

-73.38 dB, 1776 Hz (40), 3.630 msec (34)