


Level (100:3007 Hz) = 97.39 dB SPL/watt (8 ohms, @1.50 meters)

FANE SOVEREIGN 15-425

MLSSA: Frequency Domain

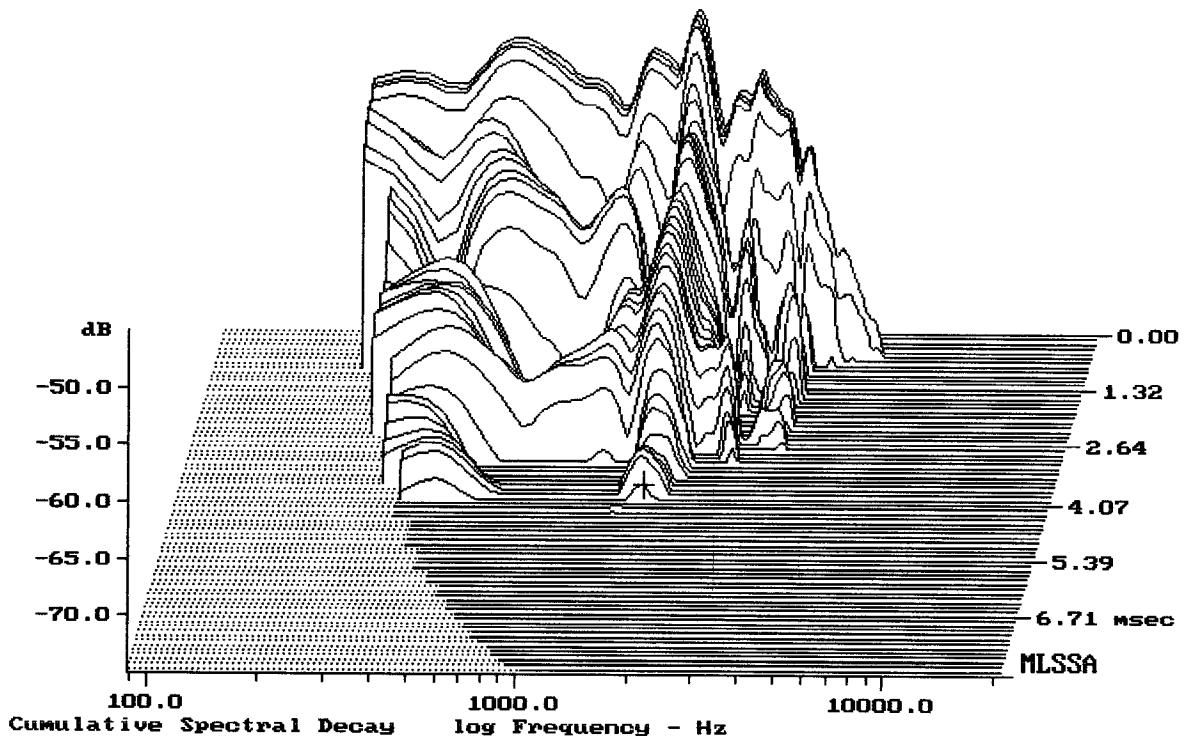

-73.75 dB, 1642 Hz (37), 3.960 msec (37)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.39	Ohms
2	Fs	50.68	Hz
3	Re	5.65	Ohms[dc]
4	Res	51.44	Ohms
5	Qms	5.01	
6	Qes	0.55	
7	Qts	0.50	
8	L1	1.03	mH
9	L2	1.83	mH
10	R2	6.01	Ohms
11	RMSE-load	0.61	Ohms
12	Vas(Sd)	152.78	liters
13	Mms	66.33	grams
14	Cms	149	μ M/Newton
15	B1	14.73	Tesla-M
16	SPLref(Sd)	97.4	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (80.00 grams)

Area (Sd): 855.30 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -30.8% (-20% to -50% is recommended).

FANE SOVEREIGN 15-425

MLSSA: Parameters

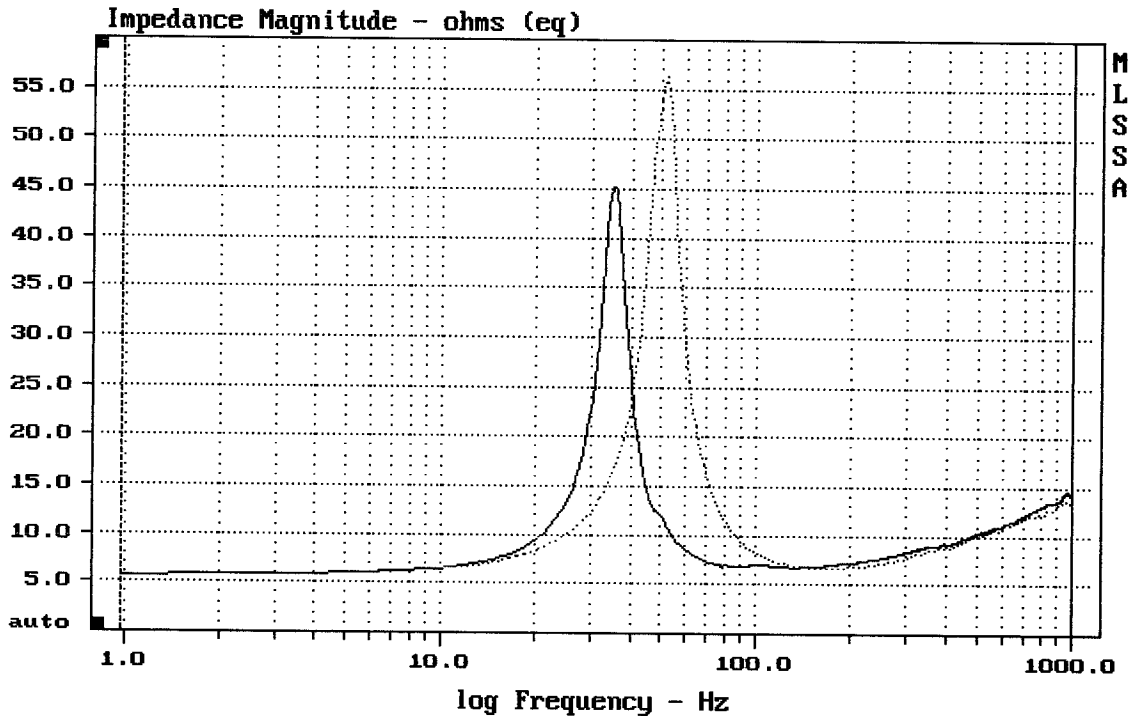

mean: 10.93, rms: 12.14, std: 5.29, max: 56.28, min: 5.69

MLSSA: Frequency Domain