


Level (100:4006 Hz) = 100.88 dB SPL/watt (8 ohms, @1.50 meters)

15" JBL/EMINENCE 330757-001 FROM TR125

MLSSA: Frequency Domain

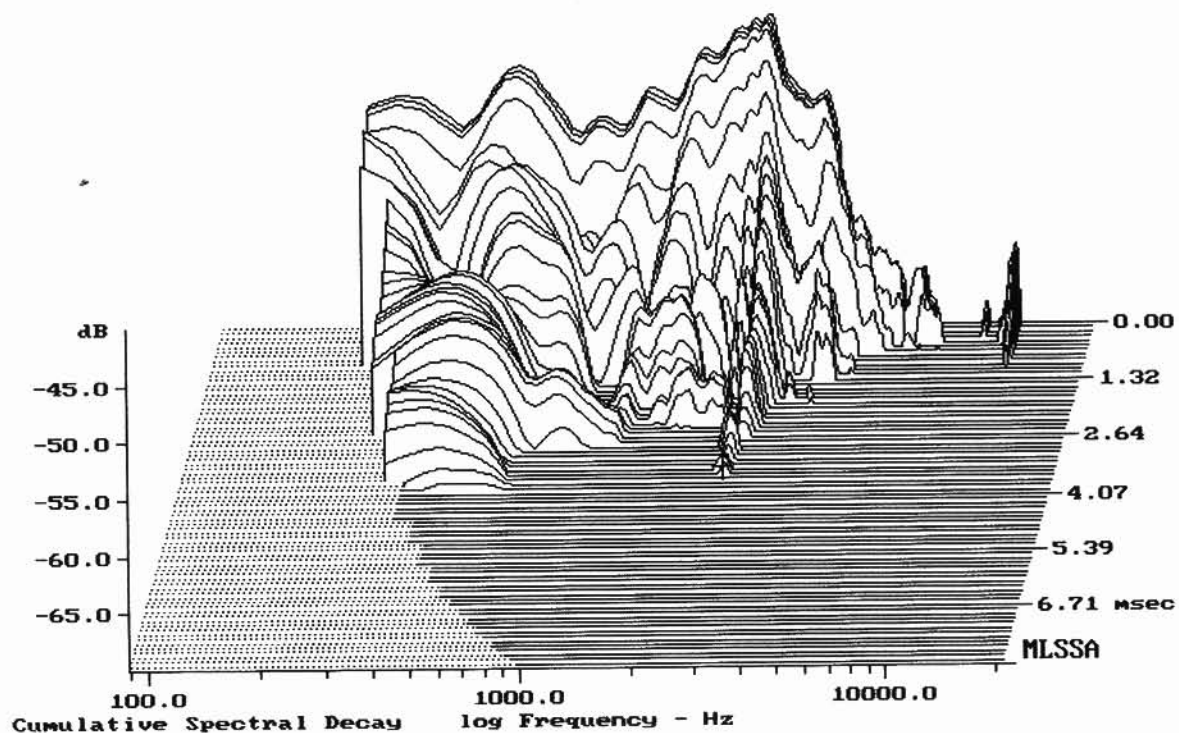

-69.28 dB, 2575 Hz (58), 3.520 msec (33)

DTTO

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.67	Ohms
2	Fs	43.82	Hz
3	Re	4.85	Ohms[dc]
4	Res	76.09	Ohms
5	Qms	6.89	
6	Qes	0.44	
7	Qts	0.41	
8	L1	0.41	mH
9	L2	1.18	mH
10	R2	8.50	Ohms
11	RMSE-load	0.69	Ohms
12	Vas(Sd)	271.52	liters
13	Mms	49.91	grams
14	Cms	264	$\mu$ M/Newton
15	Bl	12.32	Tesla-M
16	SPLref(Sd)	99.0	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (80.00 grams)

Area (Sd): 855.30 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -37.2% (-20% to -50% is recommended).

15" JBL/EMINENCE 330757-001 FROM TR125

MLSSA: Parameters

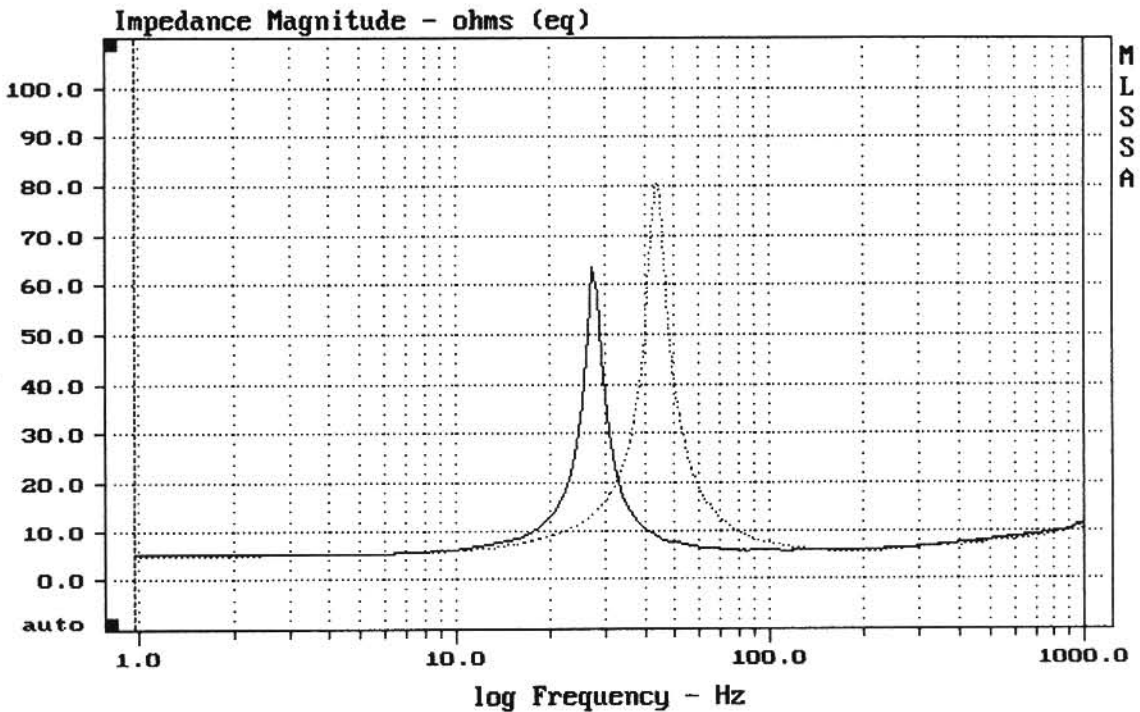

mean: 9.029, rms: 11.15, std: 6.544, max: 80.39, min: 4.897