


Level (100:2208 Hz) = 96.37 dB SPL/watt (8 ohms, @1.50 meters)

KCS S-1535

MLSSA: Frequency Domain

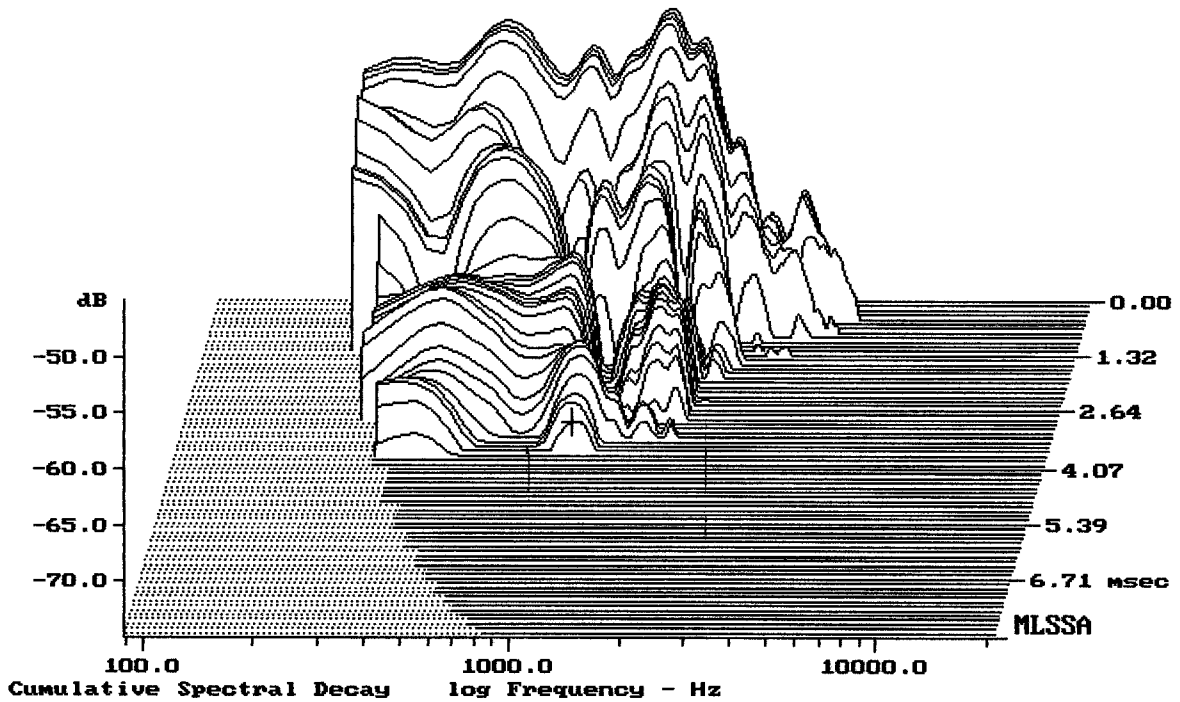

-72.44 dB, 1065 Hz (24), 3.630 msec (34)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.54	Ohms
2	Fs	40.95	Hz
3	Re	5.34	Ohms[dc]
4	Res	71.06	Ohms
5	Qms	6.08	
6	Qes	0.46	
7	Qts	0.43	
8	L1	0.93	mH
9	L2	1.36	mH
10	R2	8.01	Ohms
11	RMSE-load	0.59	Ohms
12	Vas(Sd)	178.70	liters
13	Mms	97.88	grams
14	Cms	154	$\mu\text{M}/\text{Newton}$
15	B1	17.15	Tesla-M
16	SPLref(Sd)	96.1	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (80.00 grams)

Area (Sd): 907.92 sq cm


DCR mode: Measure (-0.18 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -24.3% (-20% to -50% is recommended).

KCS S-1535

MLSSA: Parameters

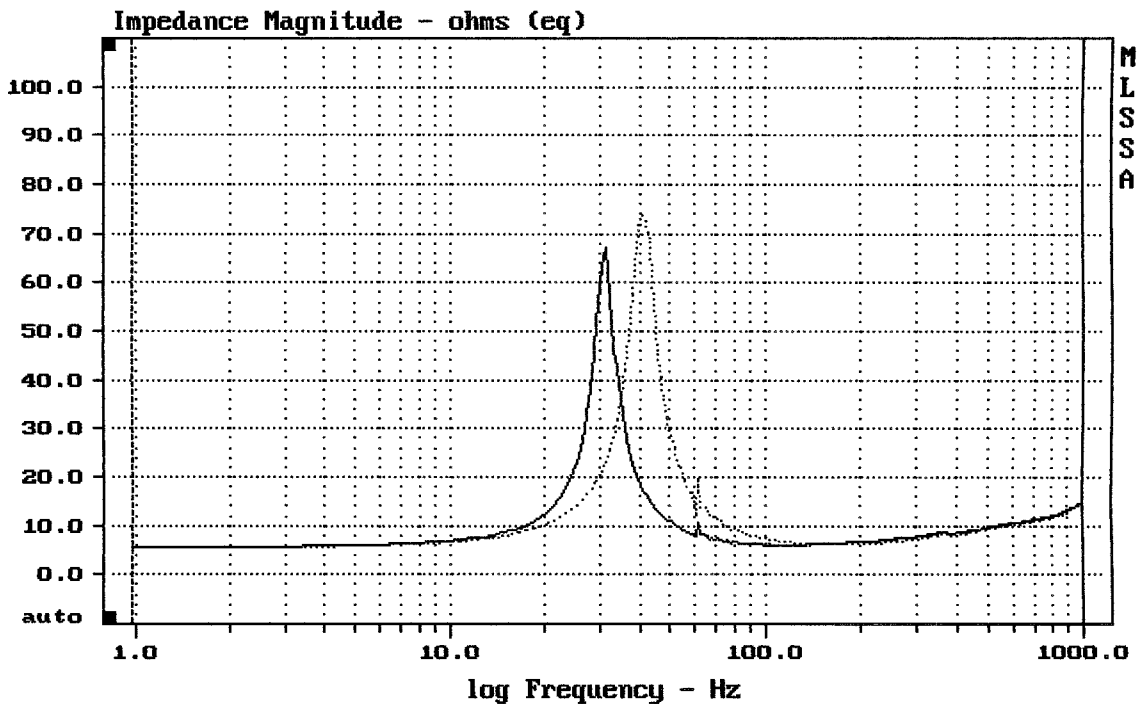

mean: 10.53, rms: 12.26, std: 6.293, max: 74.44, min: 5.521

MLSSA: Frequency Domain