

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.14	Ohms
2	Fs	25.36	Hz
3	Re	1.79	Ohms[dc]
4	Res	38.78	Ohms
5	Qms	9.72	
6	Qes	0.45	
7	Qts	0.43	
8	L1	0.53	mH
9	L2	0.63	mH
10	R2	2.45	Ohms
11	RMSE-load	0.18	Ohms
12	Vas(Sd)	226.36	liters
13	Mms	58.88	grams
14	Cms	669	$\mu\text{M}/\text{Newton}$
15	Bl	6.12	Tesla-M
16	SPLref(Sd)	91.0	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (80.00 grams)

Area (Sd): 490.87 sq cm


DCR mode: Measure (-0.06 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -26.2% (-20% to -50% is recommended).

12" KENWOOD "SIGMA SERVO"

MLSSA: Parameters

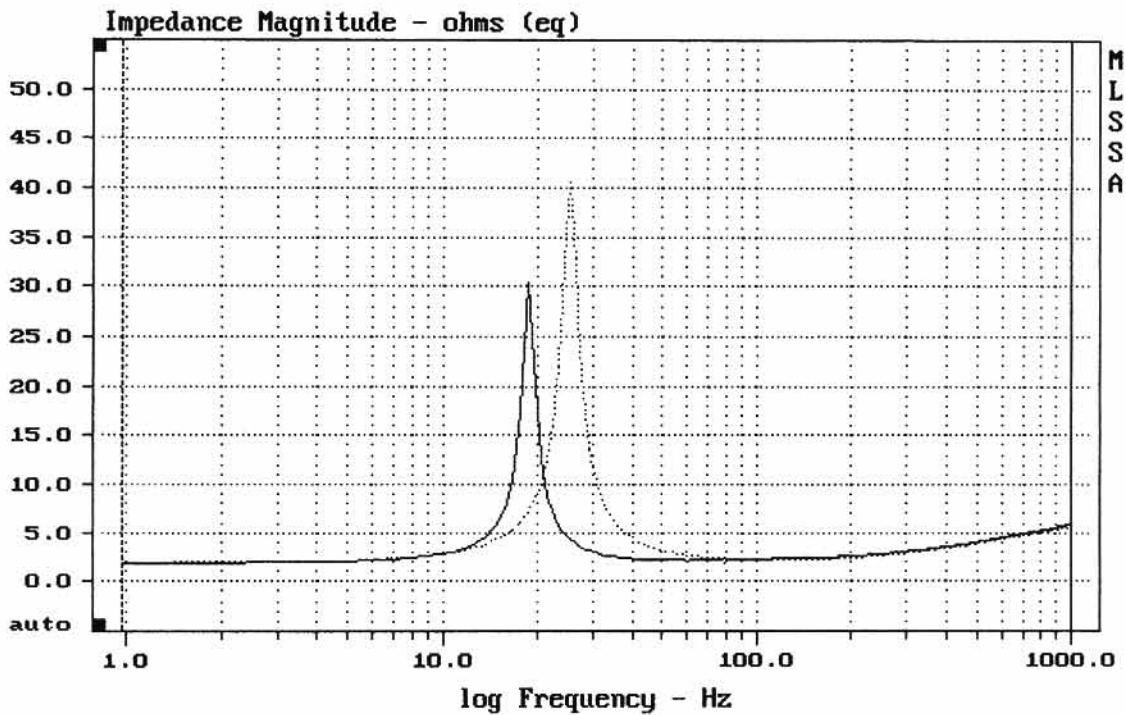

mean: 4.097, rms: 4.719, std: 2.341, max: 40.64, min: 1.895

MLSSA: Frequency Domain