


Level (100:1998 Hz) = 97.51 dB SPL/watt (8 ohms, @1.50 meters)

EMINENCE KAPPA PRO 15LF

MLSSA: Frequency Domain

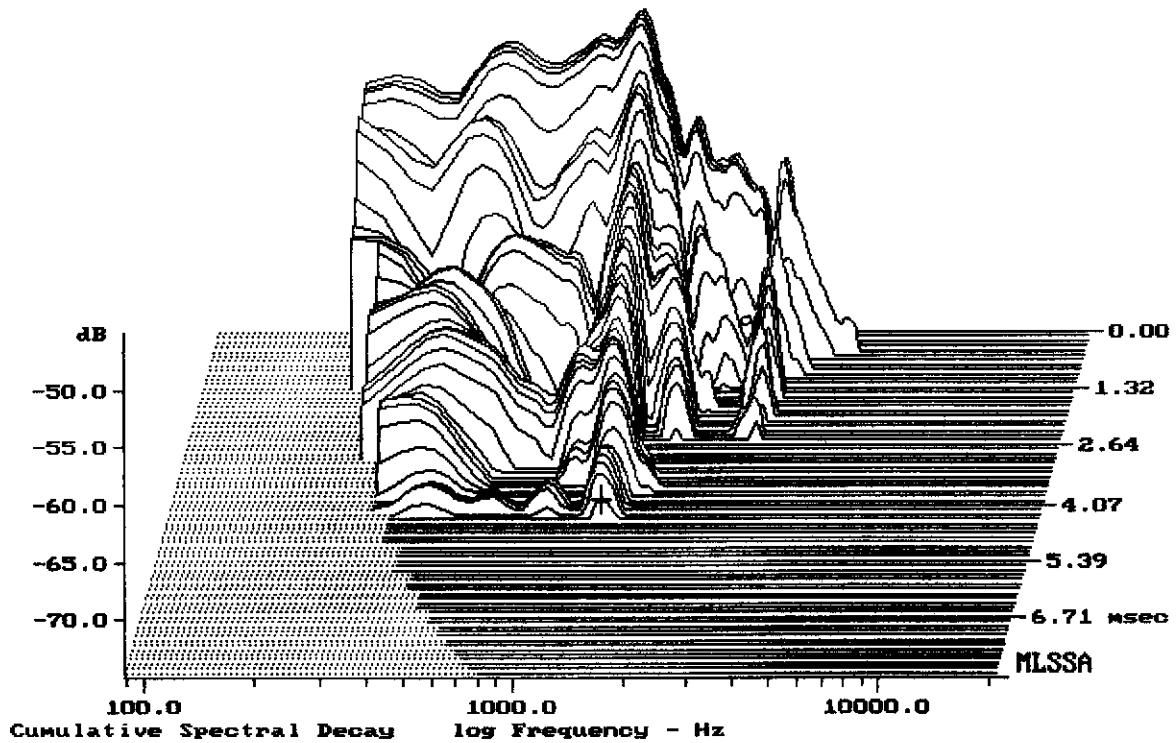

-73.24 dB, 1332 Hz (30), 4.400 msec (41)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	1.03	Ohms
2	Fs	33.40	Hz
3	Re	6.49	Ohms[dc]
4	Res	189.75	Ohms
5	Qms	9.00	
6	Qes	0.31	
7	Qts	0.30	
8	L1	0.53	mH
9	L2	2.95	mH
10	R2	21.15	Ohms
11	RMSE-load	0.92	Ohms
12	Vas(Sd)	240.46	liters
13	Mms	97.04	grams
14	Cms	234	$\mu\text{M}/\text{Newton}$
15	Bl	20.72	Tesla-M
16	SPLref(Sd)	96.5	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (80.00 grams)

Area (Sd): 855.30 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -24.7% (-20% to -50% is recommended).

EMINENCE KAPPA PRO 15LF

MLSSA: Parameters

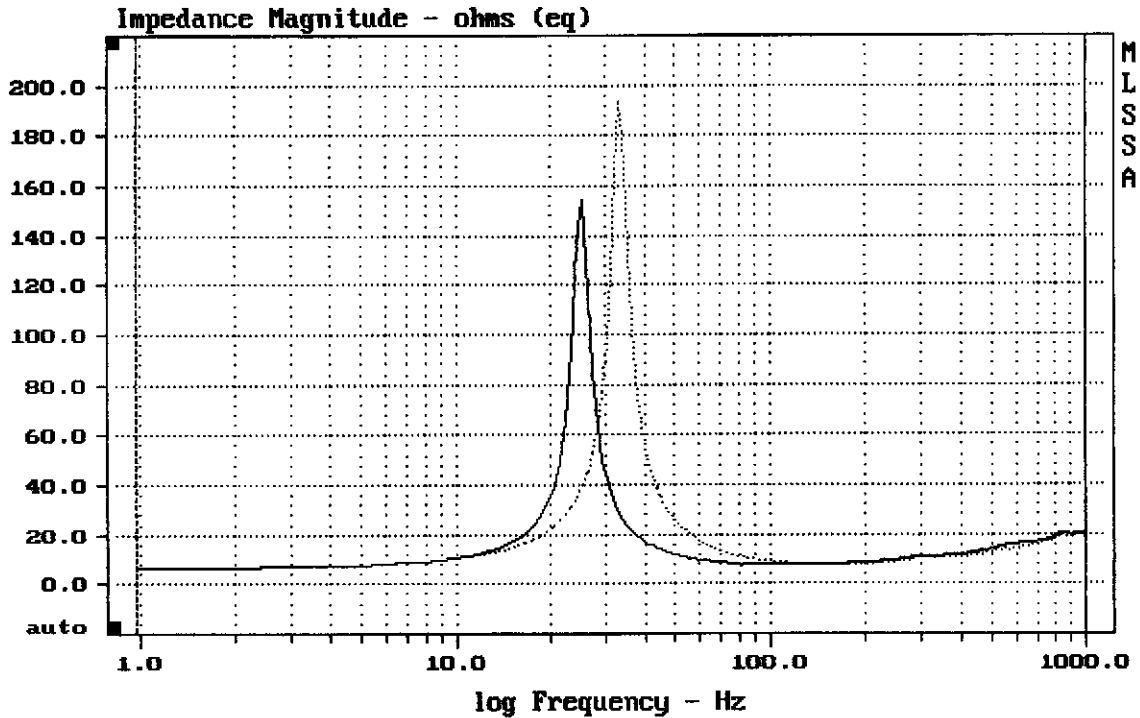

mean: 15.51, rms: 20.29, std: 13.08, max: 193.3, min: 6.56

MLSSA: Frequency Domain