



E-shop: <http://eshop.prodance.cz/lf12x401-8-ohm/d-97078/>

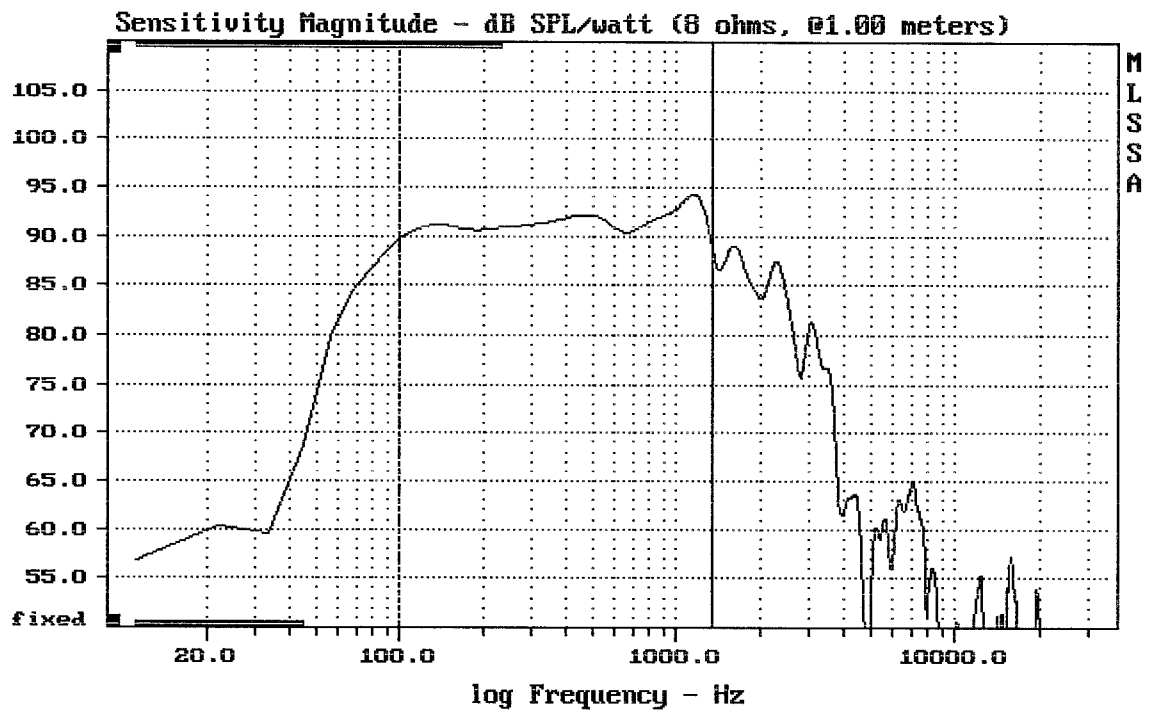

LF12X401

MLSSA: Frequency Domain

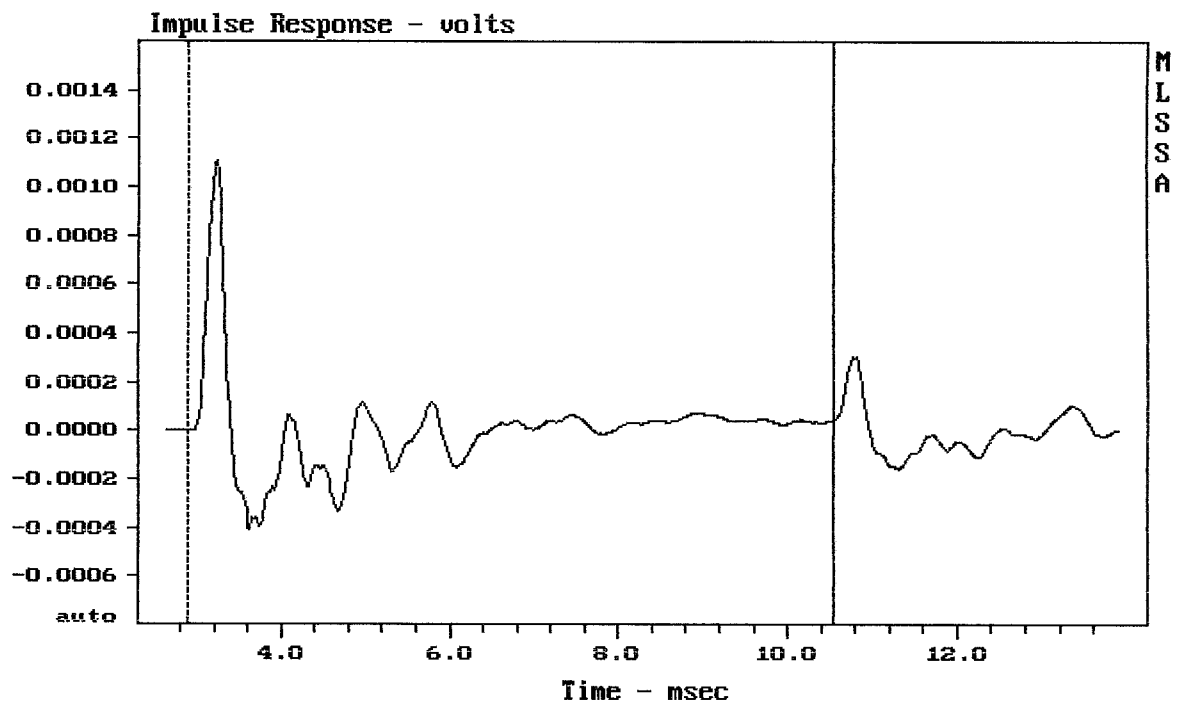

mean: 6.233e-006, rms: 0.000194, std: 0.0001939, max: 0.001109, min: -0.0004112

LF12X401

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.82	Ohms
2	Fs	50.98	Hz
3	Re	4.98	Ohms[dc]
4	Res	119.53	Ohms
5	Qms	6.73	
6	Qes	0.28	
7	Qts	0.27	
8	L1	1.62	mH
9	L2	2.59	mH
10	R2	9.85	Ohms
11	RMSE-load	0.98	Ohms
12	Vas(Sd)	43.94	liters
13	Mms	94.77	grams
14	Cms	103	$\mu\text{M}/\text{Newton}$
15	B1	23.22	Tesla-M
16	SPLref(Sd)	95.0	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (120.00 grams)

Area (Sd): 551.55 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -33.6% (-20% to -50% is recommended).

LF12X401

MLSSA: Parameters

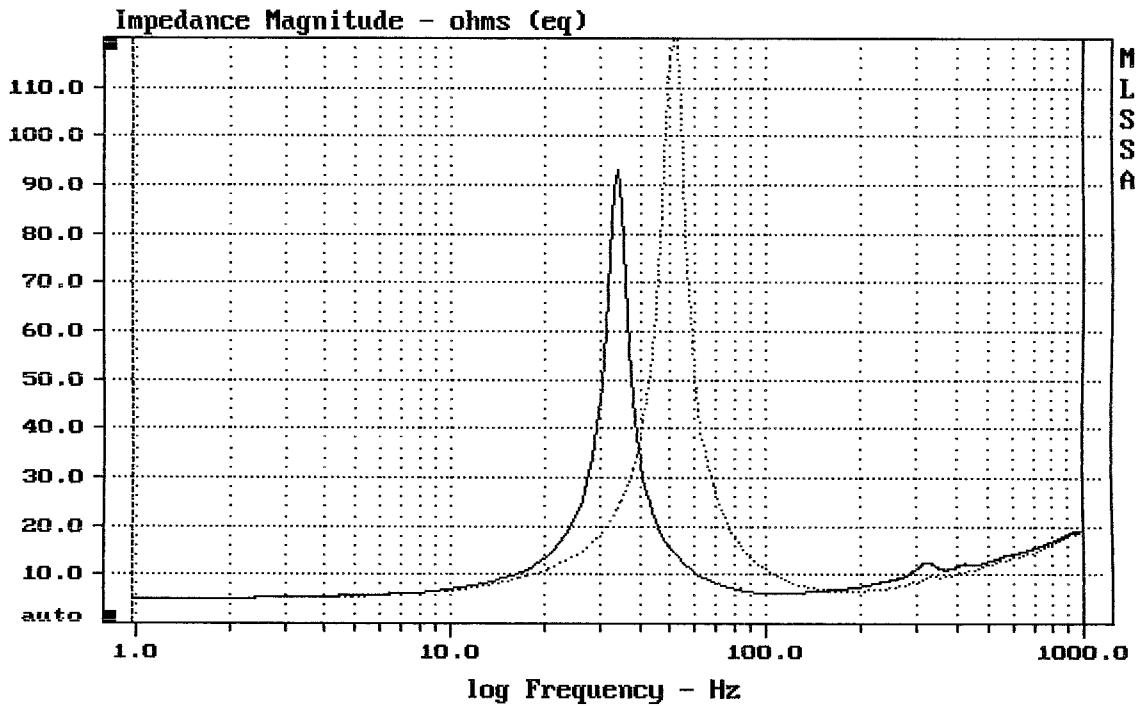

mean: 14.35, rms: 18.18, std: 11.16, max: 121.8, min: 5.065

MLSSA: Frequency Domain