



E-shop: <http://eshop.prodance.cz/mb12x351-8-ohm/d-97596/>

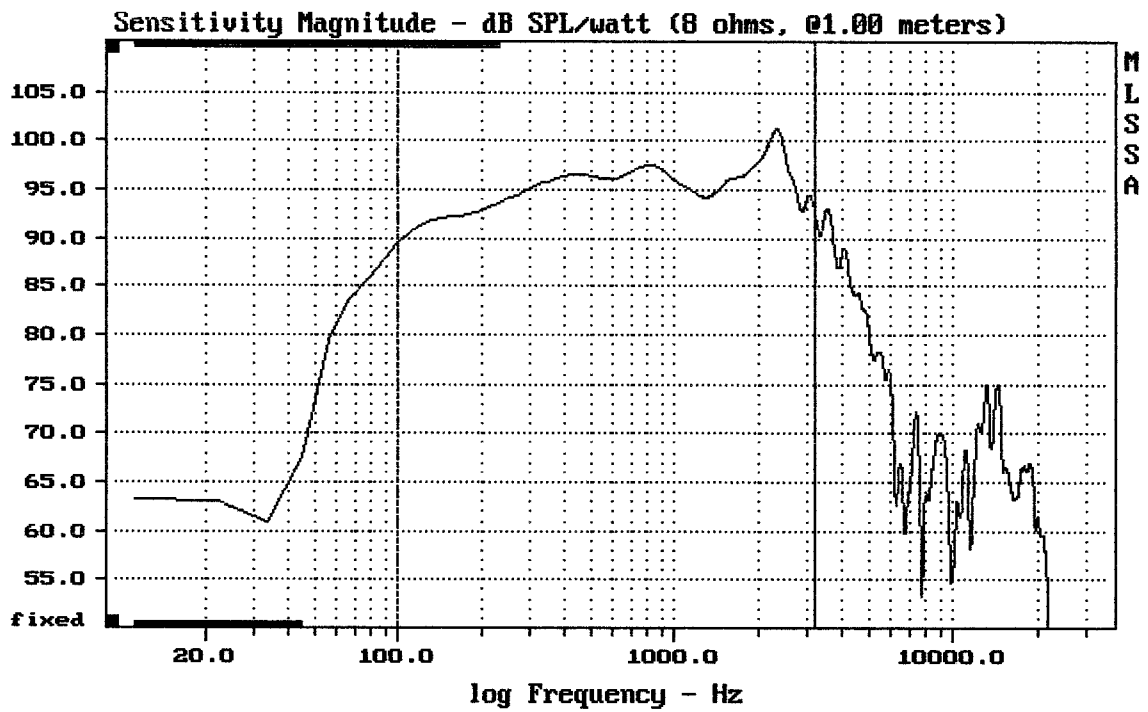

Level (100:3207 Hz) = 95.70 dB SPL/watt (8 ohms, @1.00 meters)

MB12X351

MLSSA: Frequency Domain

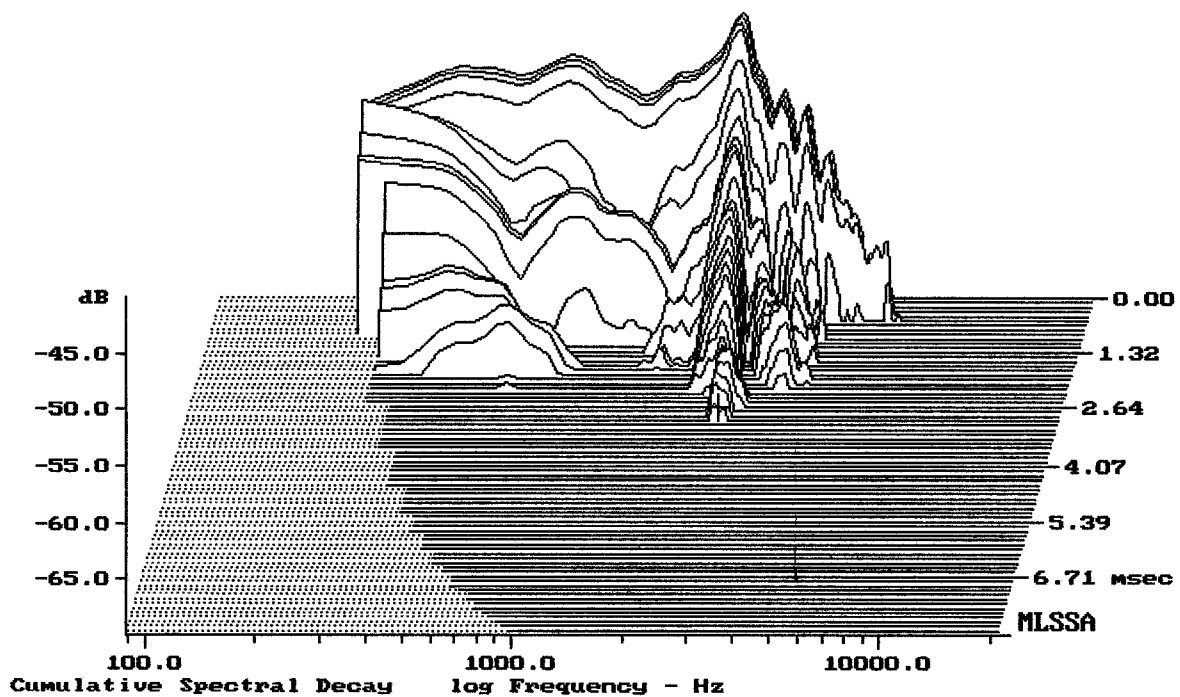

-68.89 dB, 2486 Hz (56), 2.970 msec (28)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.64	Ohms
2	Fs	81.73	Hz
3	Re	5.68	Ohms[dc]
4	Res	66.89	Ohms
5	Qms	4.92	
6	Qes	0.42	
7	Qts	0.39	
8	L1	0.98	mH
9	L2	1.63	mH
10	R2	5.68	Ohms
11	RMSE-load	0.41	Ohms
12	Vas(Sd)	23.66	liters
13	Mms	63.44	grams
14	Cms	60	$\mu\text{M}/\text{Newton}$
15	B1	21.04	Tesla-M
16	SPLref(Sd)	96.7	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (80.00 grams)

Area (Sd): 530.93 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -35.2% (-20% to -50% is recommended).

MB12X351

MLSSA: Parameters

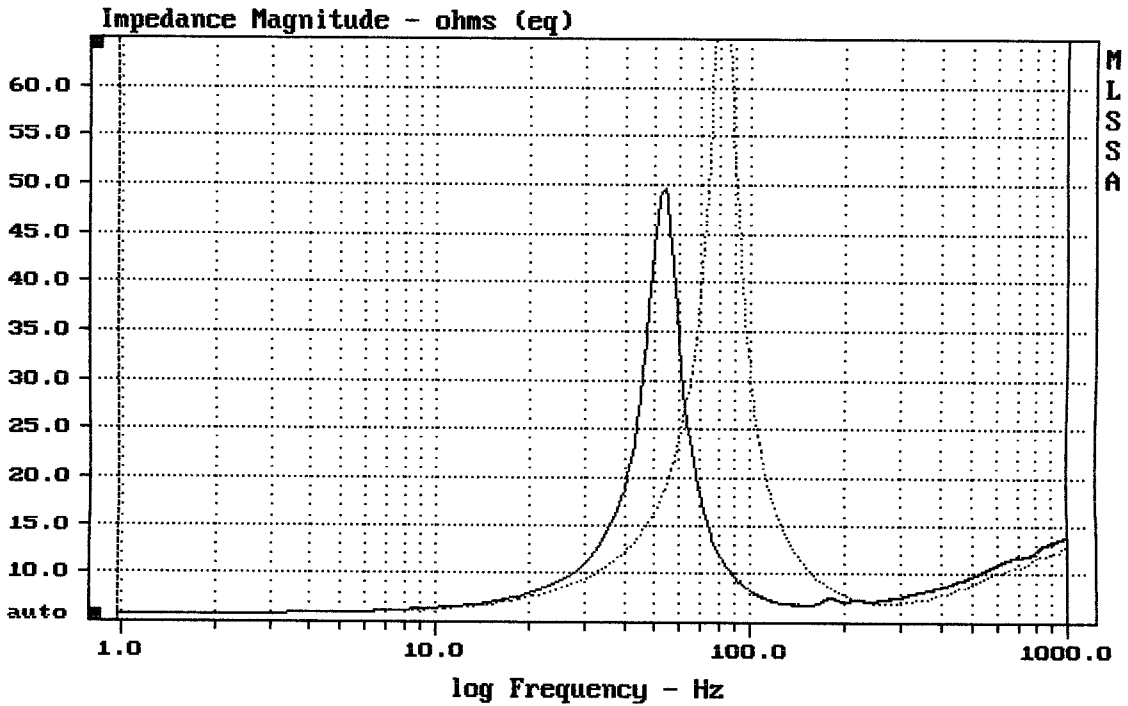

mean: 11.69, rms: 14.46, std: 8.519, max: 72.77, min: 5.77

MLSSA: Frequency Domain