

Measured Data

Line	Parameter	Value	Units
1	RMSE-free	0.53	Ohms
2	Fs	32.43	Hz
3	Re	3.25	Ohms[dc]
4	Res	18.43	Ohms
5	Qms	4.07	
6	Qes	0.72	
7	Qts	0.61	
8	L1	1.08	mH
9	L2	1.79	mH
10	R2	8.26	Ohms
11	RMSE-load	0.59	Ohms
12	Vas(Sd)	104.56	liters
13	Mms	84.38	grams
14	Cms	285	$\mu\text{M}/\text{Newton}$
15	B1	8.82	Tesla-M
16	SPLref(Sd)	88.8	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (80.00 grams)

Area (Sd): 510.71 sq cm


DCR mode: Measure (-0.06 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -25.7% (-20% to -50% is recommended).

MAGNAT XPRESS 1201


MLSSA: Parameters

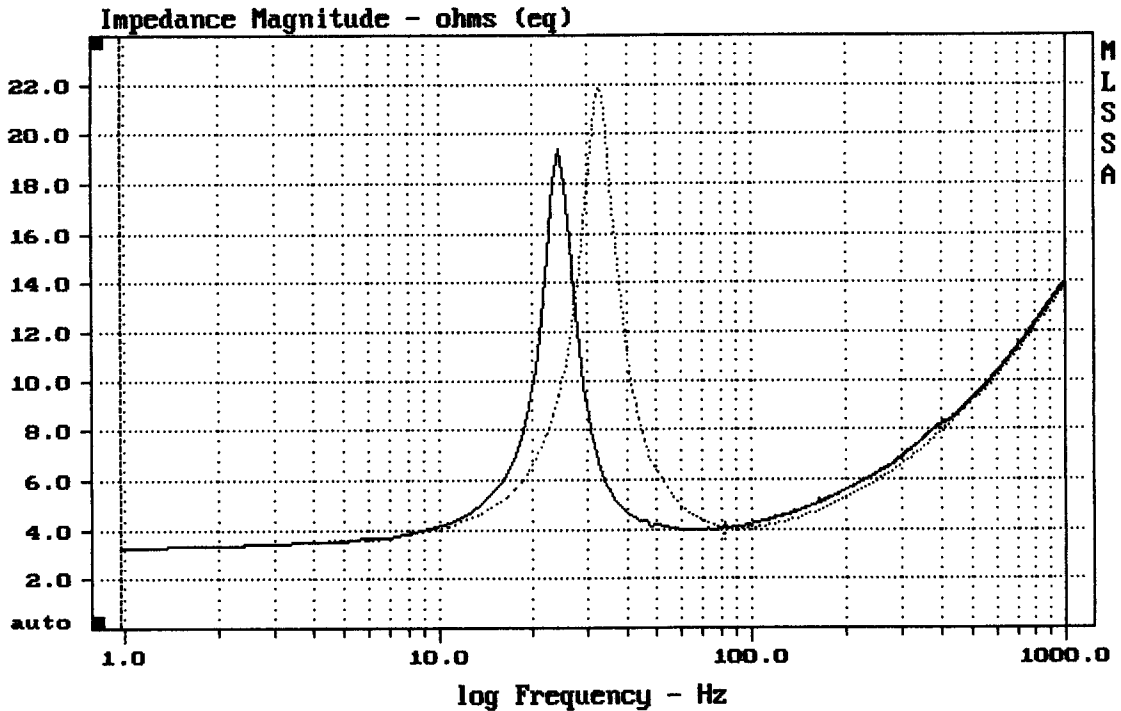

mean: 9.127, rms: 9.665, std: 3.18, max: 21.96, min: 3.304

DTTO


MLSSA: Frequency Domain

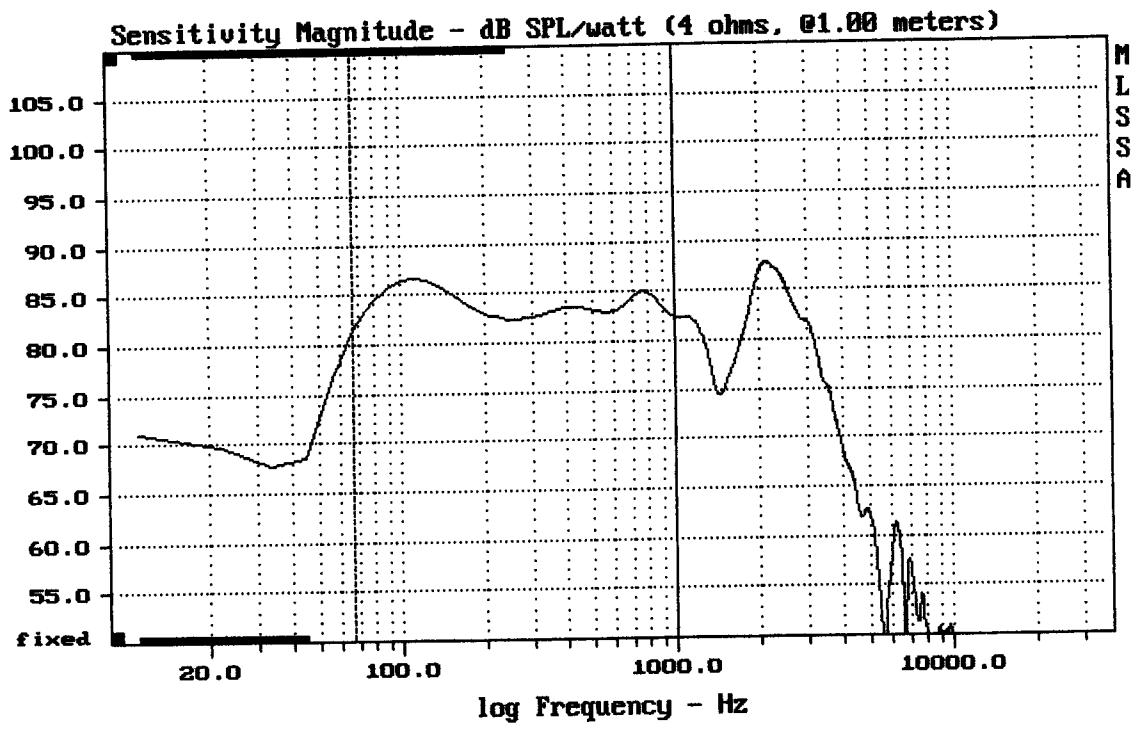

Level (67:999 Hz) = 84.13 dB SPL/watt (4 ohms, @1.00 meters)

MAGNAT XPRESS 1201

MLSSA: Frequency Domain

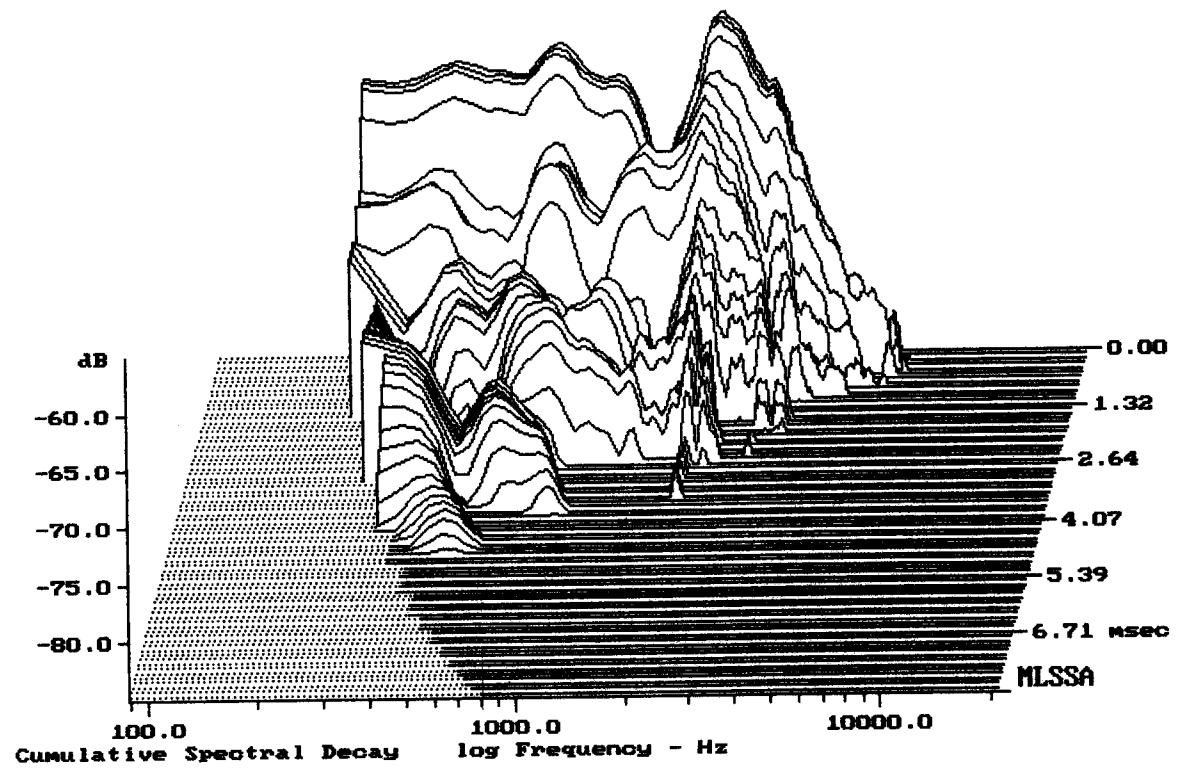

-82.56 dB, 1998 Hz (45), 3.410 msec (32)