

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.97	Ohms
2	Fs	25.01	Hz
3	Re	5.95	Ohms [dc]
4	Res	191.93	Ohms
5	Qms	9.99	
6	Qes	0.31	
7	Qts	0.30	
8	L1	0.67	mH
9	L2	1.79	mH
10	R2	17.22	Ohms
11	RMSE-load	1.71	Ohms
12	Vas (Sd)	657.44	liters
13	Mms	136.64	grams
14	Cms	296	$\mu\text{M}/\text{Newton}$
15	B1	20.31	Tesla-M
16	SPLref (Sd)	97.0	dB [Re]
17	Rub-index	0.01	

Method: Mass-loaded (80.00 grams)

Area (Sd): 1256.64 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -18.9% (-20% to -50% is recommended).

MC CAULEY B1860


MLSSA: Parameters

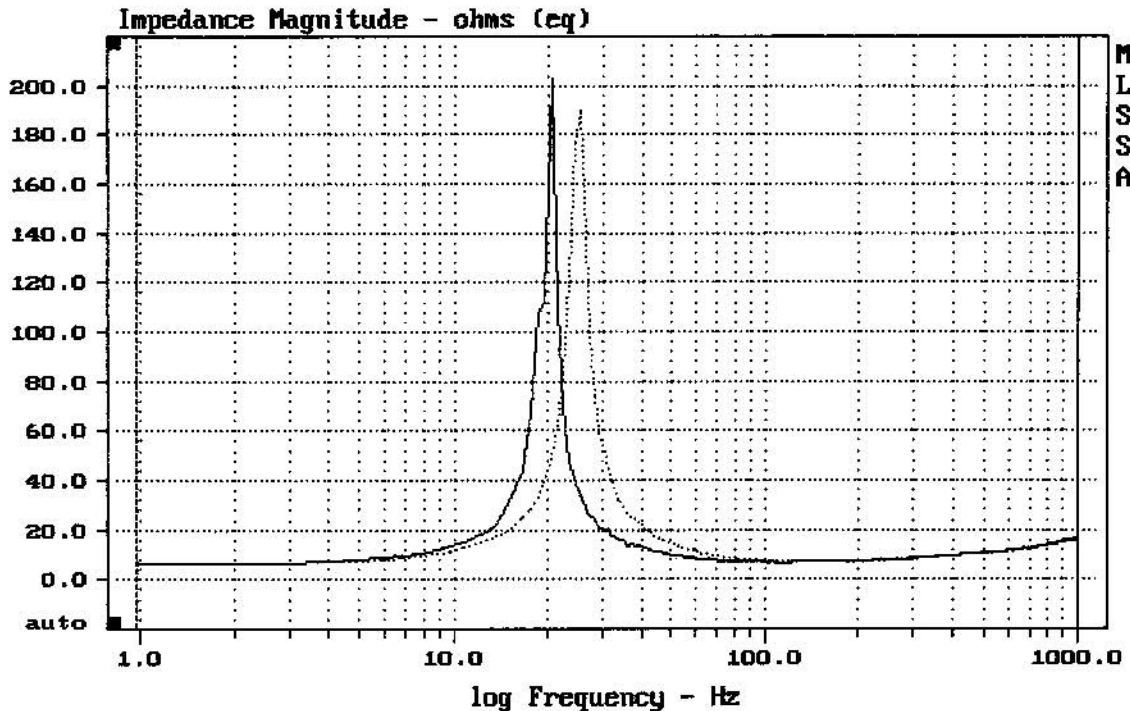

CURSOR: dy = -0.163759 x = 1000.9766 (1025)

DTTO

MLSSA: Frequency Domain

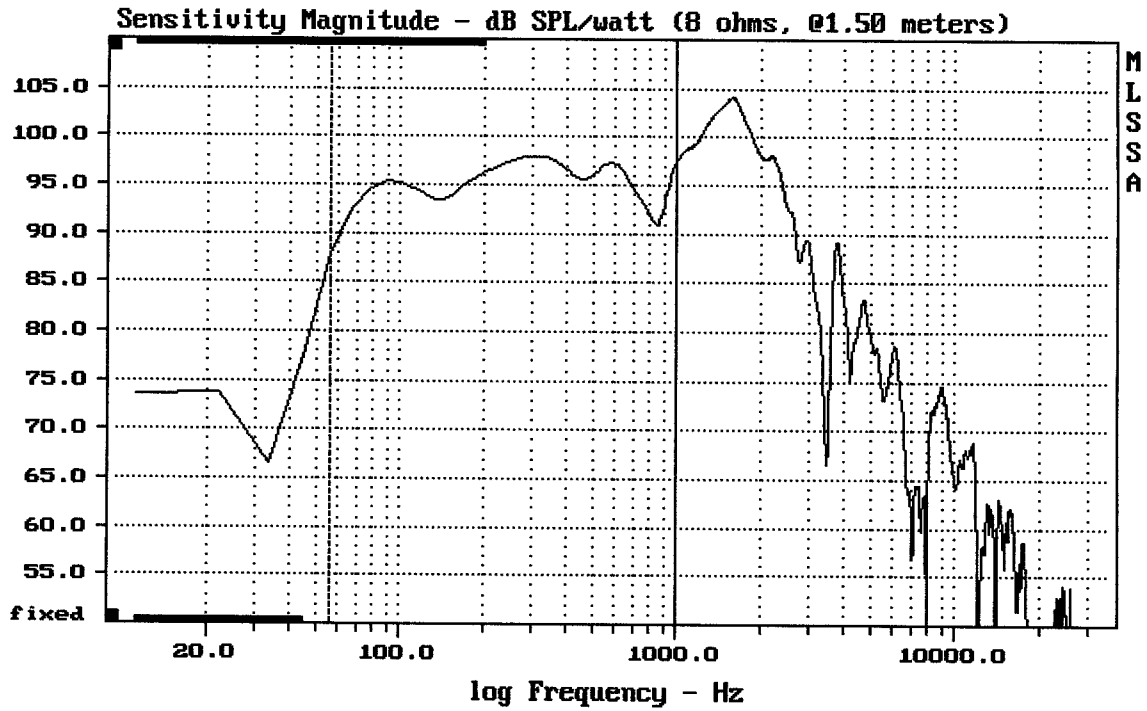

Level (55:999 Hz) = 95.48 dB SPL/watt (8 ohms, @1.50 meters)

MC CAULEY B1860