


Level (100:4006 Hz) = 98.64 dB SPL/watt (8 ohms, @1.00 meters)

PD.12BM40

MLSSA: Frequency Domain

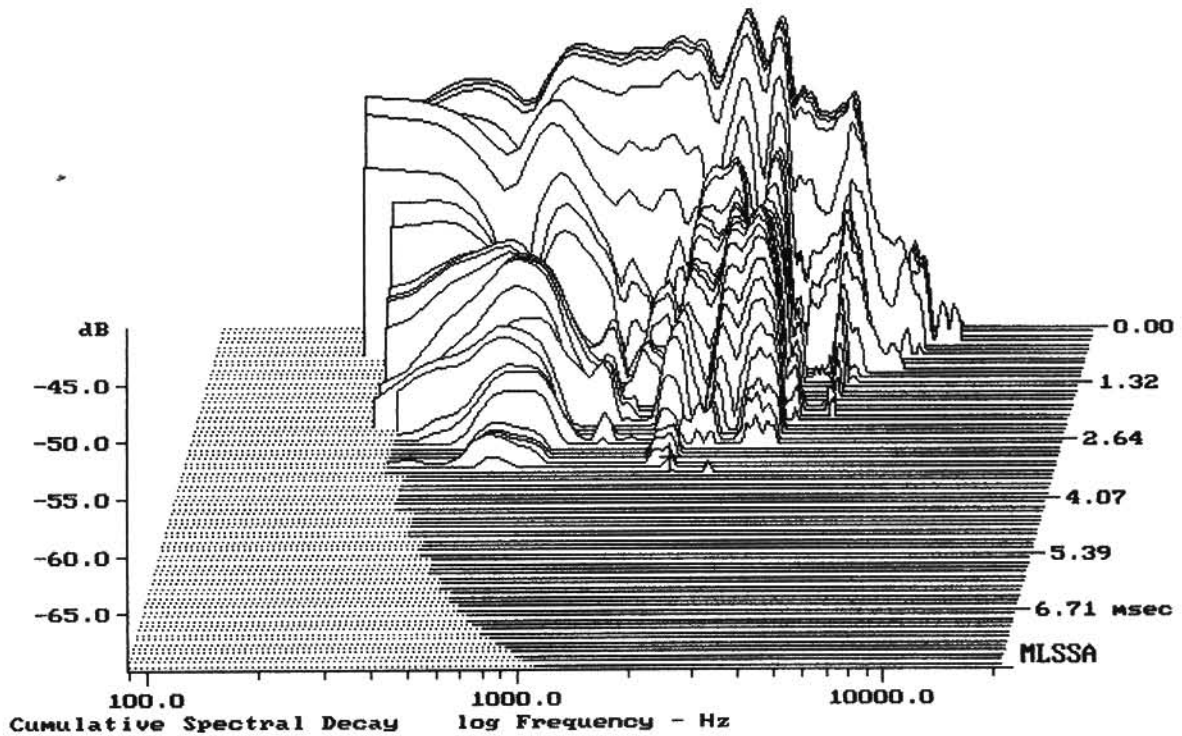

-69.06 dB, 1820 Hz (41), 3.300 msec (31)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.46	Ohms
2	Fs	67.40	Hz
3	Re	5.28	Ohms[dc]
4	Res	140.03	Ohms
5	Qms	10.06	
6	Qes	0.38	
7	Qts	0.37	
8	L1	0.31	mH
9	L2	0.94	mH
10	R2	2.35	Ohms
11	RMSE-load	0.70	Ohms
12	Vas(Sd)	36.92	liters
13	Mms	59.80	grams
14	Cms	93	$\mu\text{M}/\text{Newton}$
15	B1	18.77	Tesla-M
16	SPLref(Sd)	96.6	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (80.00 grams)

Area (Sd): 530.93 sq cm


DCR mode: Measure (-0.06 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -34.2% (-20% to -50% is recommended).

PD.12BM40

MLSSA: Parameters

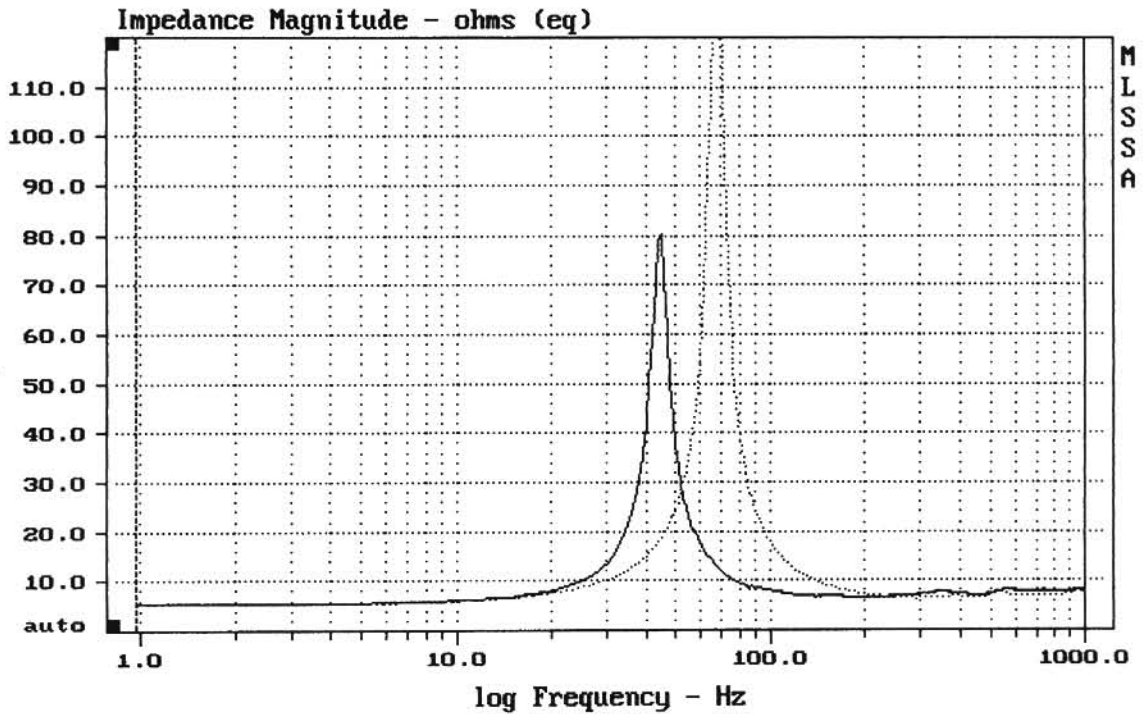

mean: 9.792, rms: 16.13, std: 12.81, max: 146.2, min: 5.352

MLSSA: Frequency Domain