


Level (100:4006 Hz) = 99.26 dB SPL/watt (8 ohms, @1.50 meters)

PD.15B40

MLSSA: Frequency Domain

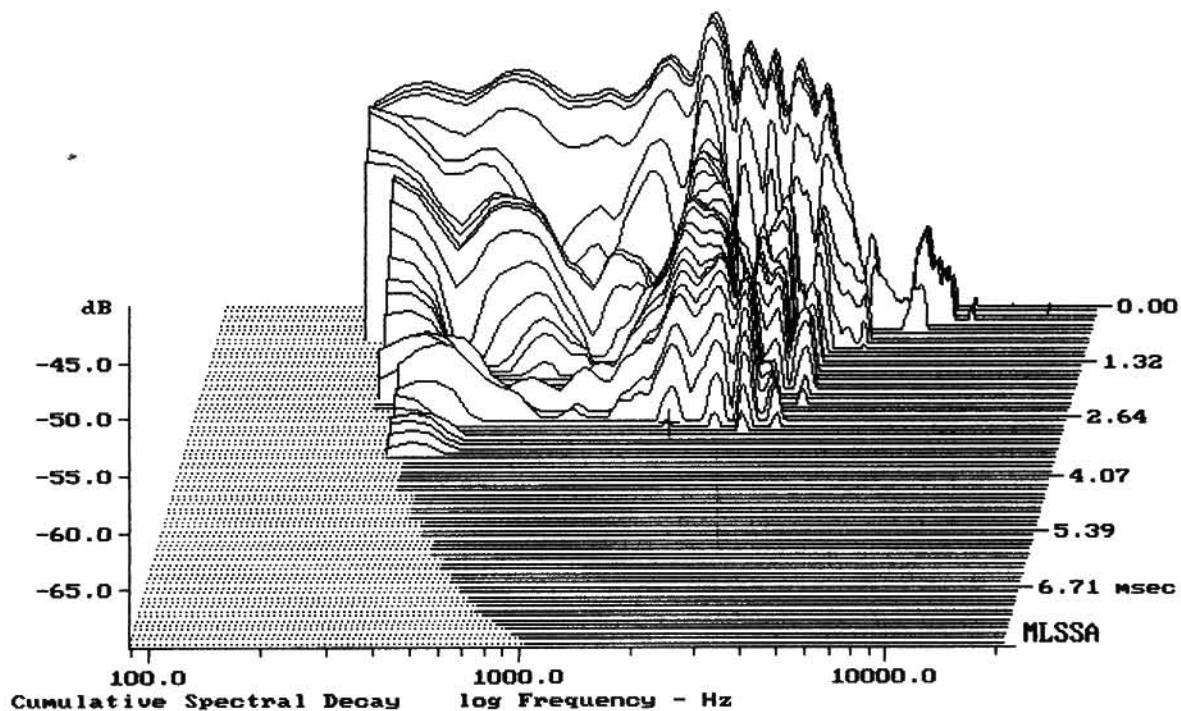

-69.73 dB, 1731 Hz (39), 2.860 msec (27)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.49	Ohms
2	Fs	53.53	Hz
3	Re	5.20	Ohms[dc]
4	Res	110.21	Ohms
5	Qms	9.94	
6	Qes	0.47	
7	Qts	0.45	
8	L1	0.27	mH
9	L2	0.84	mH
10	R2	2.88	Ohms
11	RMSE-load	0.67	Ohms
12	Vas(Sd)	99.06	liters
13	Mms	91.68	grams
14	Cms	96	$\mu\text{M}/\text{Newton}$
15	B1	18.49	Tesla-M
16	SPLref(Sd)	96.9	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (120.00 grams)

Area (Sd): 855.30 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -32.5% (-20% to -50% is recommended).

PD.15B40

MLSSA: Parameters

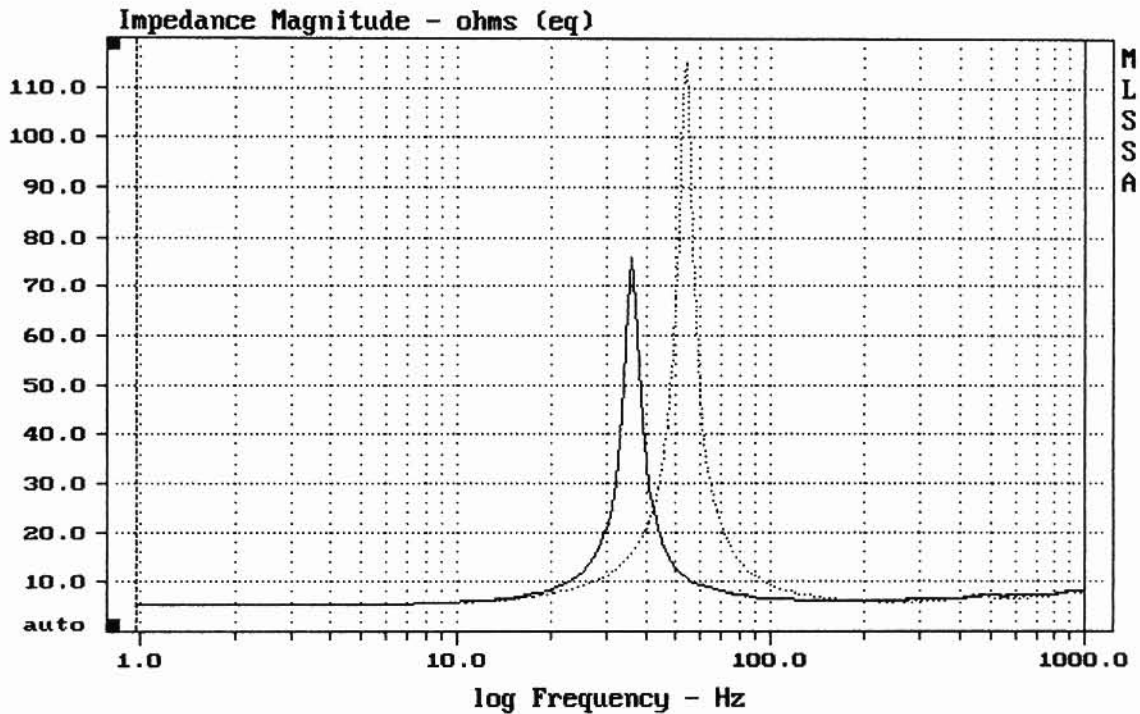

mean: 8.559, rms: 12.42, std: 9.005, max: 115, min: 5.264

MLSSA: Frequency Domain