


Level (100:6203 Hz) = 99.72 dB SPL/watt (16 ohms, @1.00 meters)

PD123ER/16

MLSSA: Frequency Domain

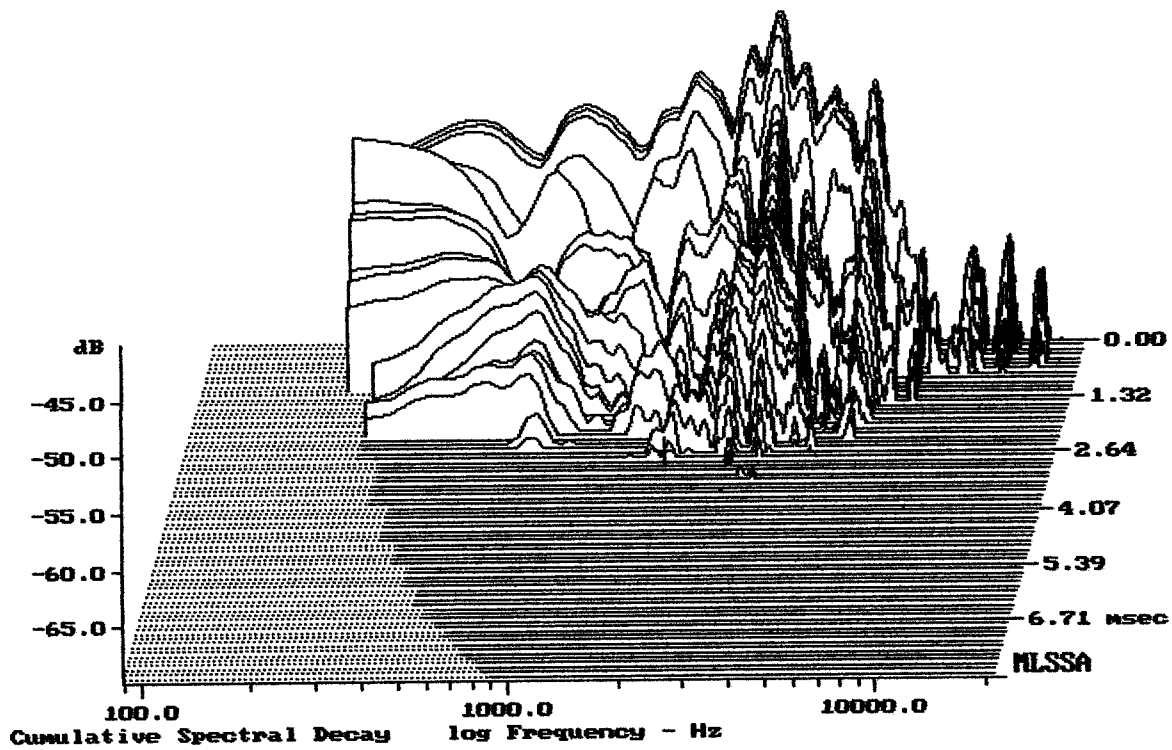

-69.51 dB, 1828 Hz (41), 2.750 msec (26)

DTTO

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	1.02	Ohms
2	Fs	66.95	Hz
3	Re	12.34	Ohms[dc]
4	Res	245.80	Ohms
5	Qms	7.05	
6	Qes	0.35	
7	Qts	0.34	
8	L1	0.31	mH
9	L2	3.42	mH
10	R2	8.63	Ohms
11	RMSE-load	0.60	Ohms
12	Vas(Sd)	41.78	liters
13	Mms	53.54	grams
14	Cms	106	$\mu$ M/Newton
15	B1	28.03	Tesla-M
16	SPLref(Sd)	97.3	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (80.00 grams)

Area (Sd): 530.93 sq cm


DCR mode: Measure (-0.11 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -37.0% (-20% to -50% is recommended).

PD123ER/16

MLSSA: Parameters

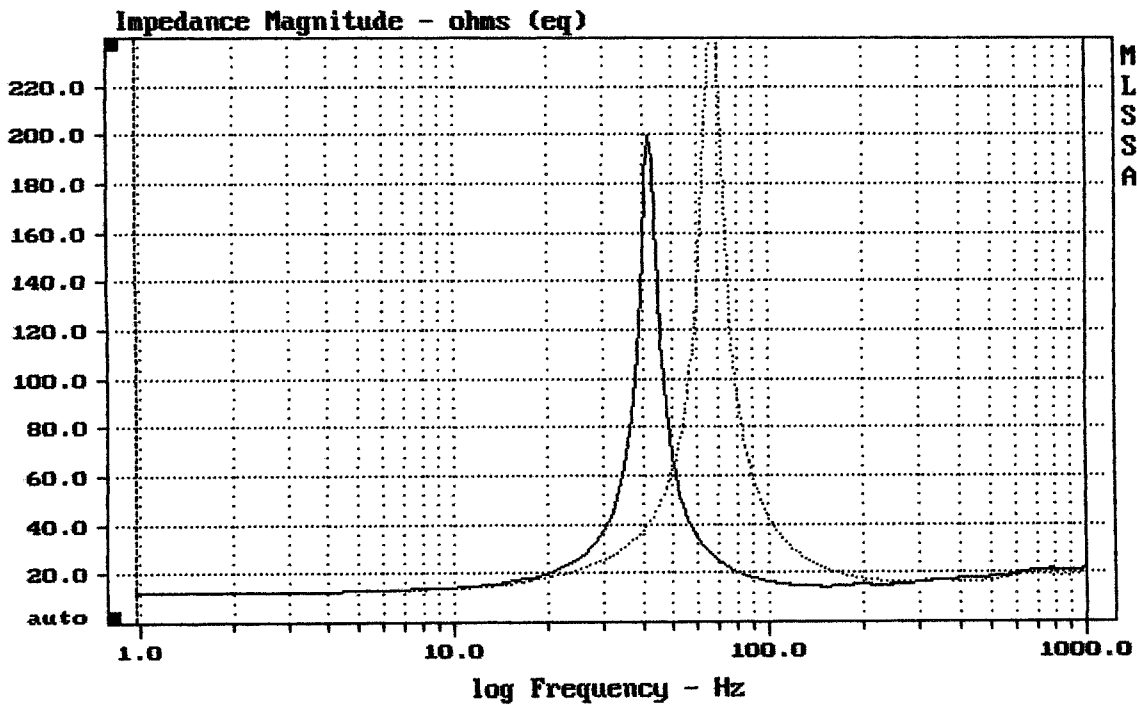

mean: 24.04, rms: 35.24, std: 25.77, max: 258, min: 12.47

MLSSA: Frequency Domain