


Level (100:2497 Hz) = 95.43 dB SPL/watt (8 ohms, @1.50 meters)

PDN.15BR40

MLSSA: Frequency Domain

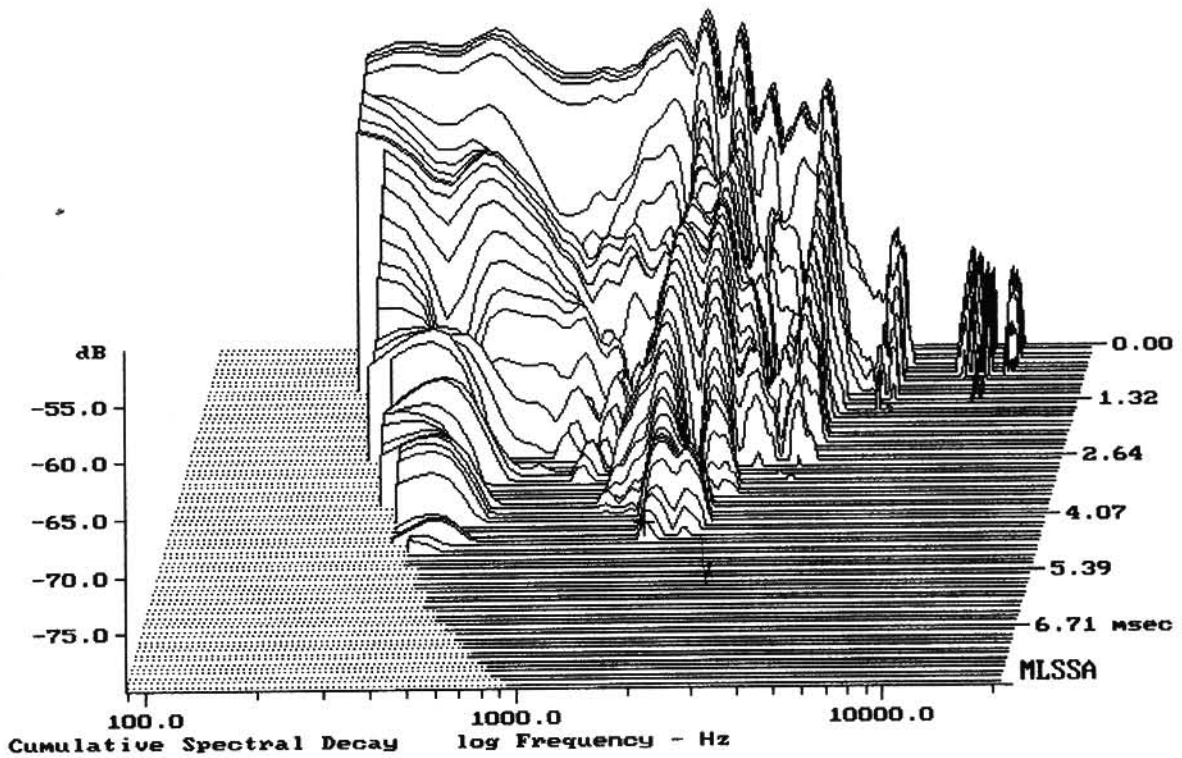

-78.52 dB, 1731 Hz (39), 4.620 msec (43)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.53	Ohms
2	Fs	47.38	Hz
3	Re	5.10	Ohms[dc]
4	Res	74.46	Ohms
5	Qms	6.75	
6	Qes	0.46	
7	Qts	0.43	
8	L1	0.73	mH
9	L2	1.62	mH
10	R2	4.76	Ohms
11	RMSE-load	0.64	Ohms
12	Vas(Sd)	127.01	liters
13	Mms	85.89	grams
14	Cms	131	$\mu\text{M}/\text{Newton}$
15	B1	16.79	Tesla-M
16	SPLref(Sd)	96.5	dB[Re]
17	Rub-index	0.02	

Method: Mass-loaded (120.00 grams)

Area (Sd): 829.58 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -34.1% (-20% to -50% is recommended).

PDN.15BR40

MLSSA: Parameters

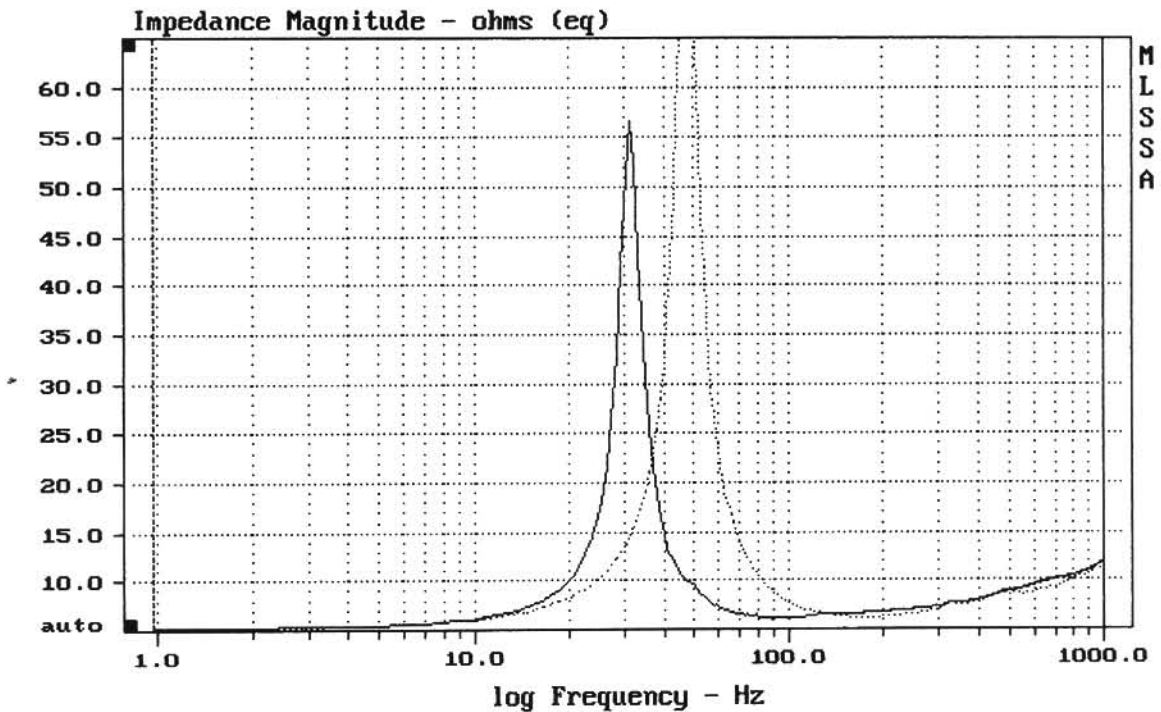

mean: 9.691, rms: 11.73, std: 6.603, max: 77.97, min: 5.205

MLSSA: Frequency Domain