

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	1.15	Ohms
2	Fs	54.63	Hz
3	Re	5.69	Ohms[dc]
4	Res	198.45	Ohms
5	Qms	9.55	
6	Qes	0.27	
7	Qts	0.27	
8	L1	1.25	mH
9	L2	2.49	mH
10	R2	7.37	Ohms
11	RMSE-load	1.47	Ohms
12	Vas(Sd)	83.35	liters
13	Mms	98.42	grams
14	Cms	86	$\mu\text{M}/\text{Newton}$
15	B1	26.50	Tesla-M
16	SPLref(Sd)	98.8	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (80.00 grams)

Area (Sd): 829.58 sq cm


DCR mode: Measure (-0.06 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -24.4% (-20% to -50% is recommended).

PDN.15SB40


MLSSA: Parameters

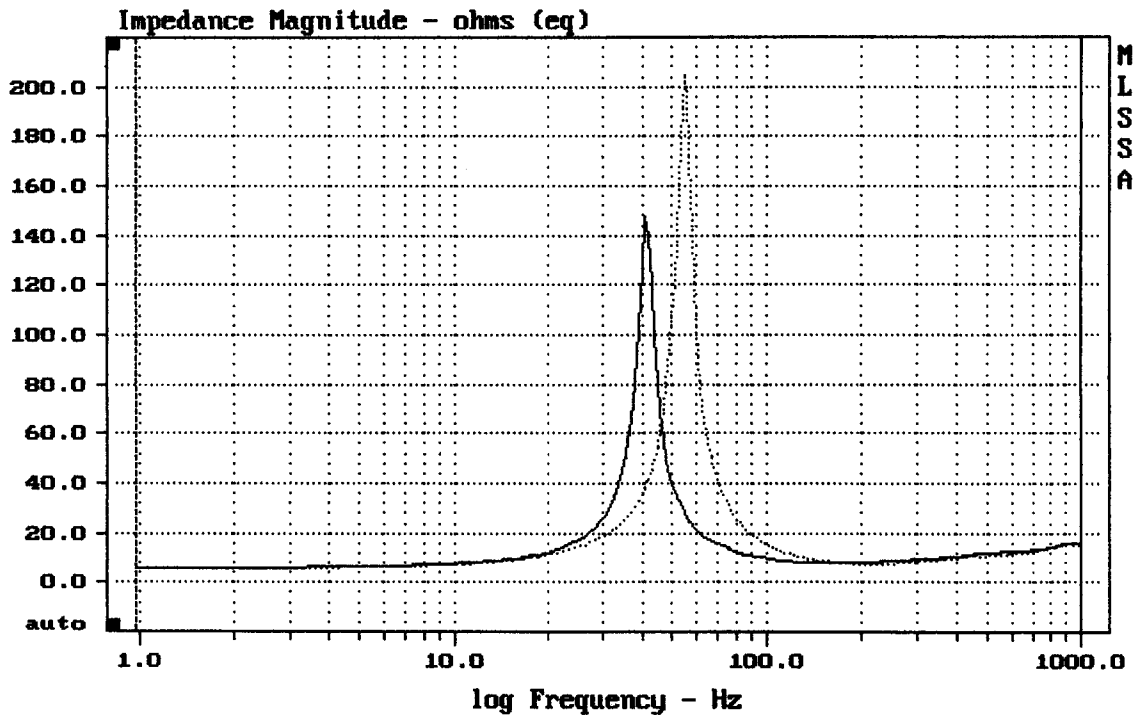

mean: 14.4, rms: 21.96, std: 16.58, max: 204, min: 5.73

DITO


MLSSA: Frequency Domain

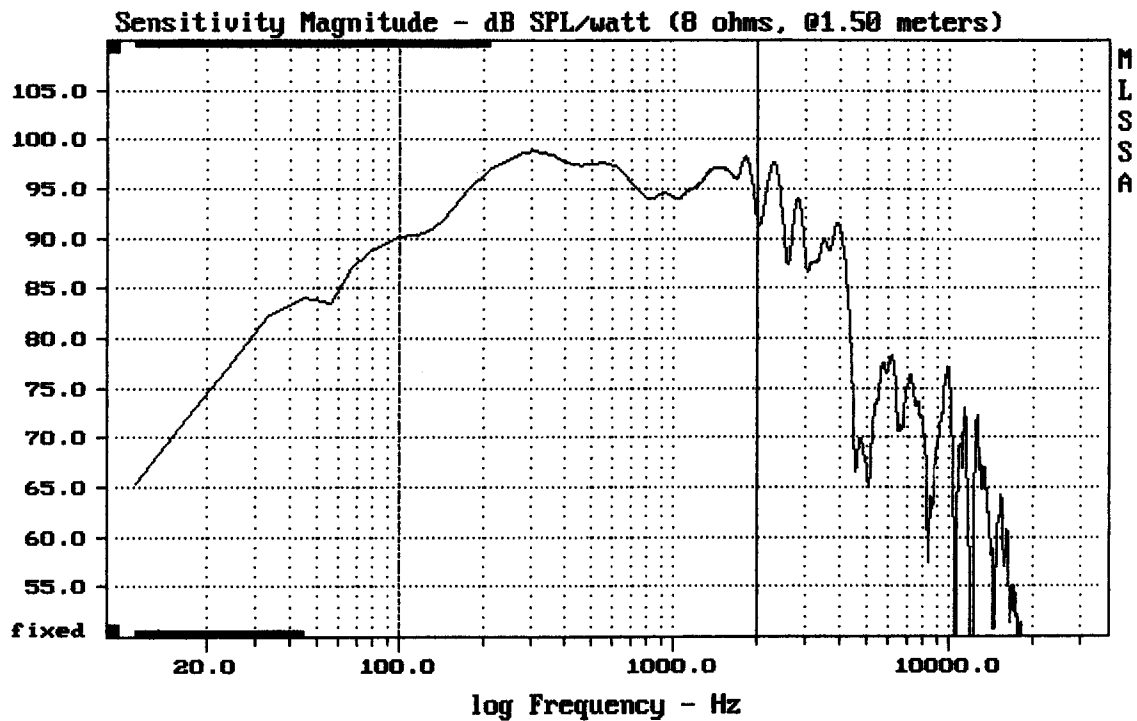

Level (100:2009 Hz) = 96.23 dB SPL/watt (8 ohms, @1.50 meters)

PDN.15SB40

MLSSA: Frequency Domain

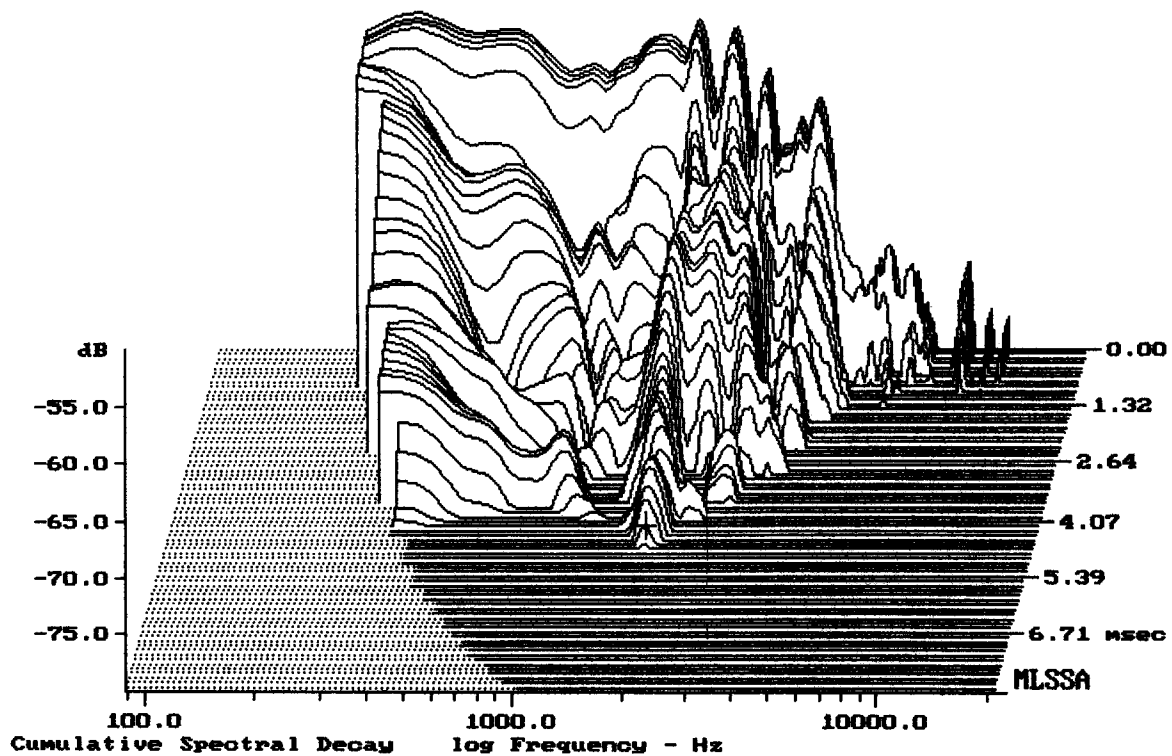

-78.39 dB, 1820 Hz (41), 4.620 msec (43)