

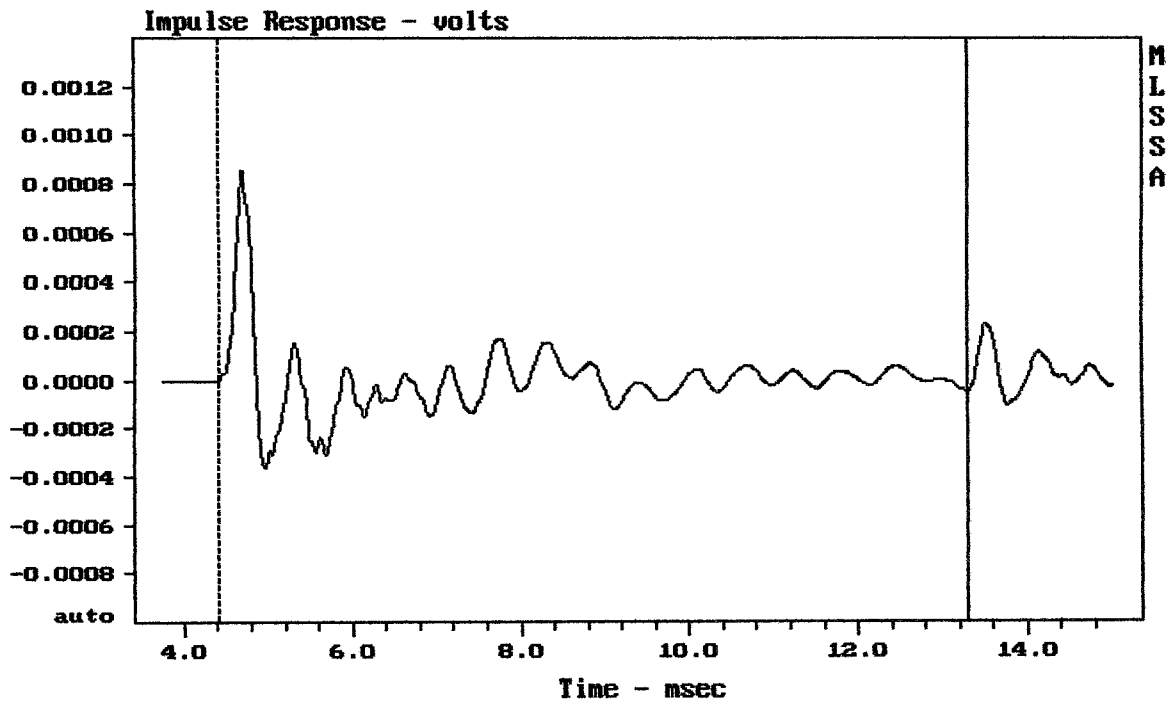

---

Level (55:2009 Hz) = 96.27 dB SPL/watt (8 ohms, @1.50 meters)

---

PD.1850/2

MLSSA: Frequency Domain




---

mean: -1.345e-006, rms: 0.0001434, std: 0.0001434, max: 0.0008582, min: -0.000

---

PD.1850/2

MLSSA: Time Domain

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.87	Ohms
2	Fs	32.65	Hz
3	Re	5.22	Ohms[dc]
4	Res	189.88	Ohms
5	Qms	8.34	
6	Qes	0.23	
7	Qts	0.22	
8	L1	1.42	mH
9	L2	1.88	mH
10	R2	8.19	Ohms
11	RMSE-load	0.68	Ohms
12	Vas(Sd)	201.66	liters
13	Mms	224.33	grams
14	Cms	106	$\mu$ M/Newton
15	B1	32.36	Tesla-M
16	SPLref(Sd)	96.7	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (140.00 grams)

Area (Sd): 1164.16 sq cm

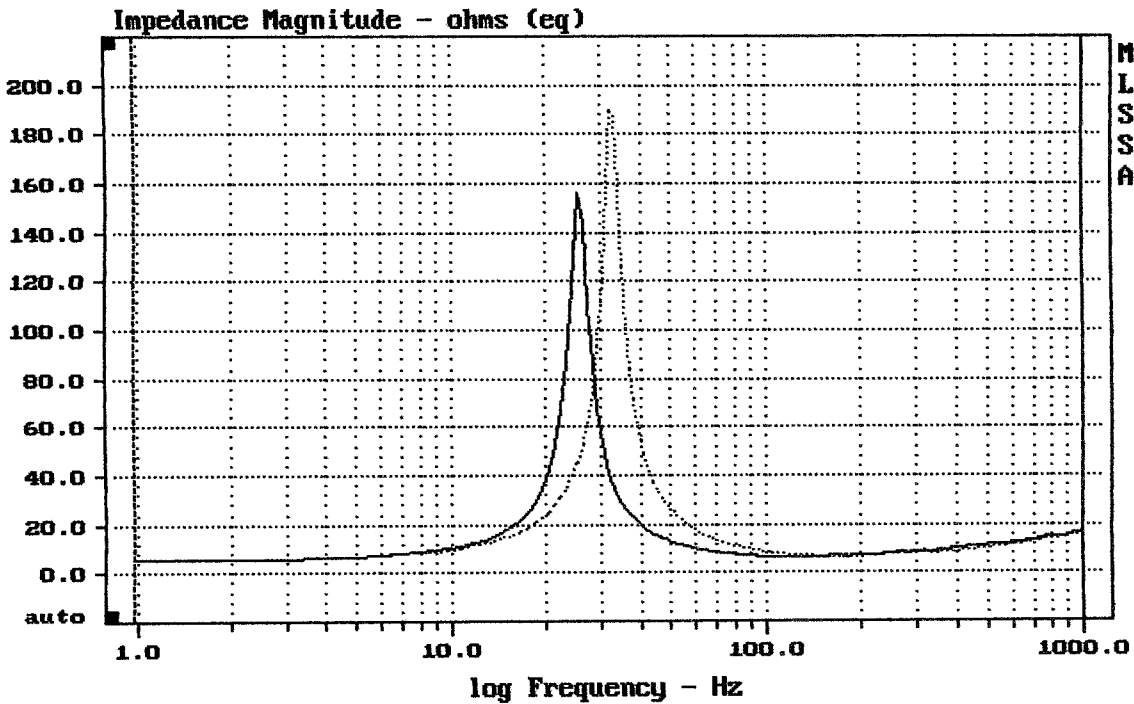
DCR mode: Measure (-0.12 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -21.4% (-20% to -50% is recommended).

PD.1850/2

MLSSA: Parameters



mean: 13.22, rms: 18.8, std: 13.37, max: 189.9, min: 5.393

MLSSA: Frequency Domain