


Level (55:2009 Hz) = 98.09 dB SPL/watt (8 ohms, @1.50 meters)

PD.1851/2

MLSSA: Frequency Domain

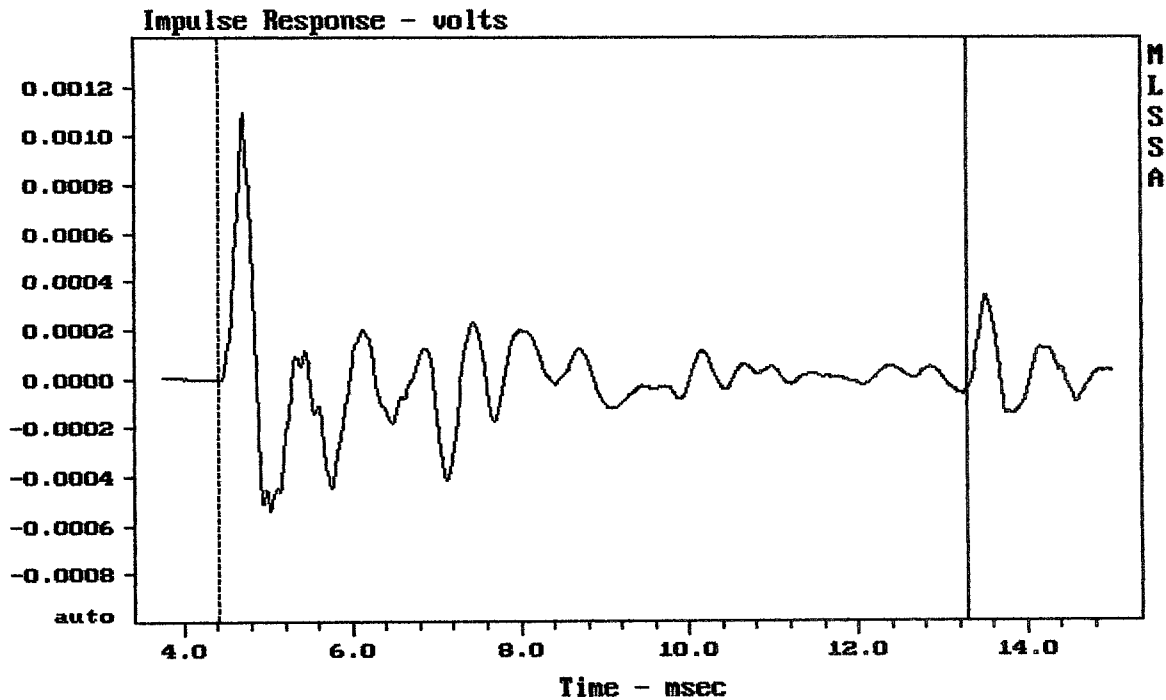

mean: $-1.413e-006$, rms: 0.0001946, std: 0.0001946, max: 0.001092, min: -0.0005

PD.1851/2

MLSSA: Time Domain

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	1.08	Ohms
2	Fs	42.25	Hz
3	Re	5.27	Ohms[dc]
4	Res	309.08	Ohms
5	Qms	18.09	
6	Qes	0.31	
7	Qts	0.30	
8	L1	0.85	mH
9	L2	1.75	mH
10	R2	6.57	Ohms
11	RMSE-load	0.82	Ohms
12	Vas(Sd)	115.03	liters
13	Mms	234.79	grams
14	Cms	60	μ M/Newton
15	B1	32.64	Tesla-M
16	SPLref(Sd)	96.3	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (140.00 grams)

Area (Sd): 1164.16 sq cm


DCR mode: Measure (-0.12 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -21.0% (-20% to -50% is recommended).

PD.1851/2

MLSSA: Parameters

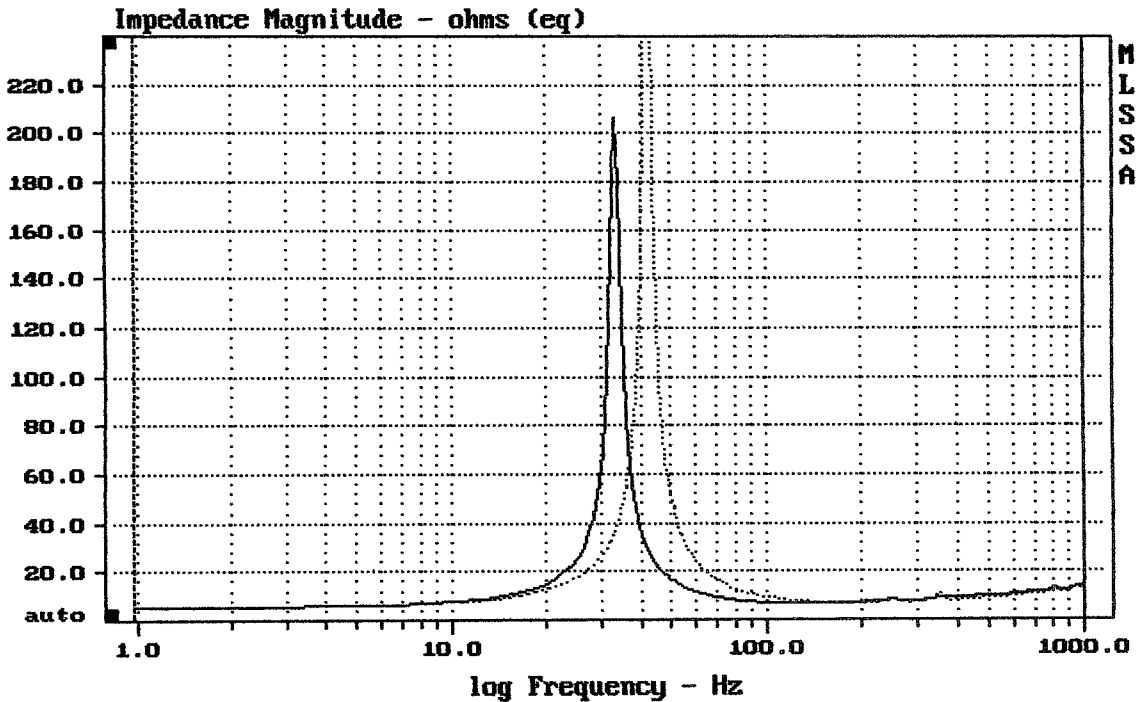

mean: 12.14, rms: 21.2, std: 17.38, max: 299.7, min: 5.425

MLSSA: Frequency Domain