


mean: 1.998e-006, rms: 0.0002043, std: 0.0002043, max: 0.0007423, min: -0.0013


CX15N251

MLSSA: Time Domain

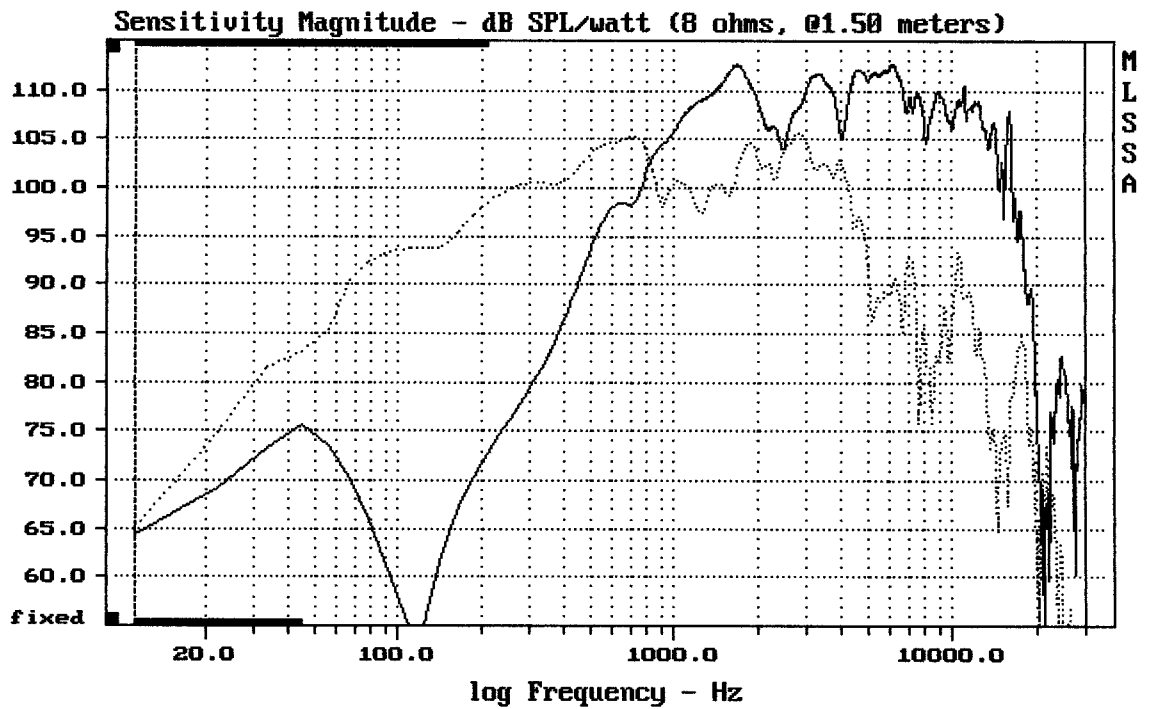

CURSOR: dy = -37.416 x = 30007.1014 (2704)


CX15N251

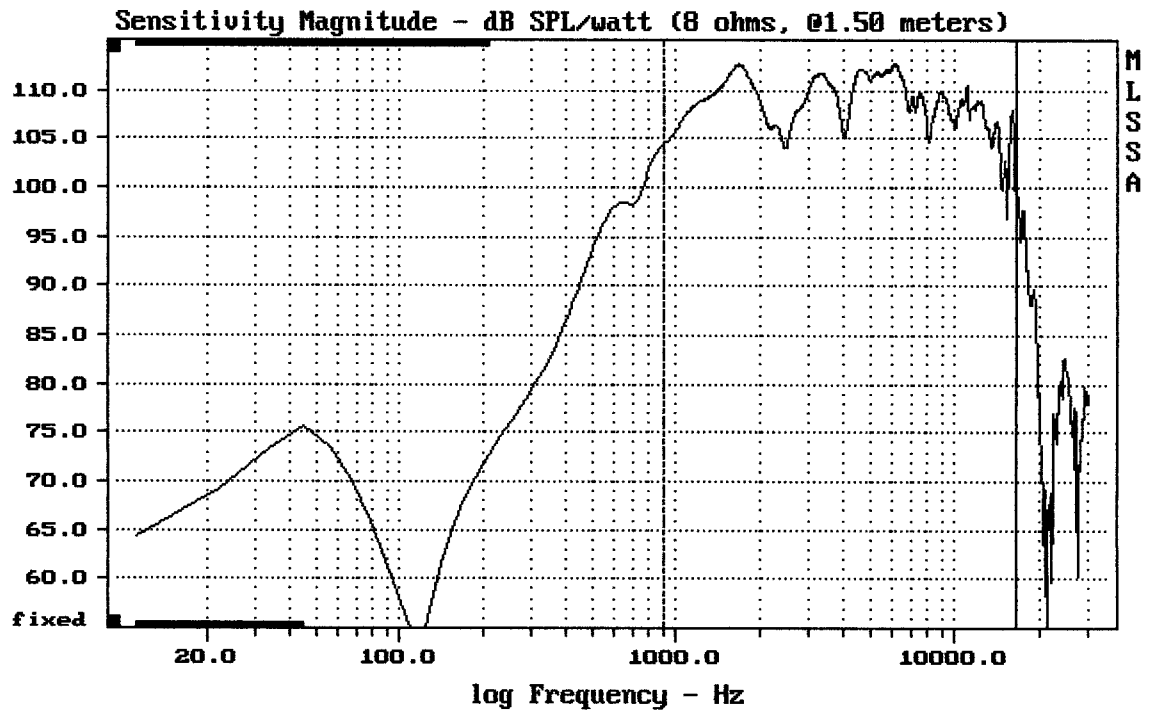


Level (899:16502 Hz) = 109.35 dB SPL/watt (8 ohms, @1.50 meters)

CX15N251

MLSSA: Frequency Domain

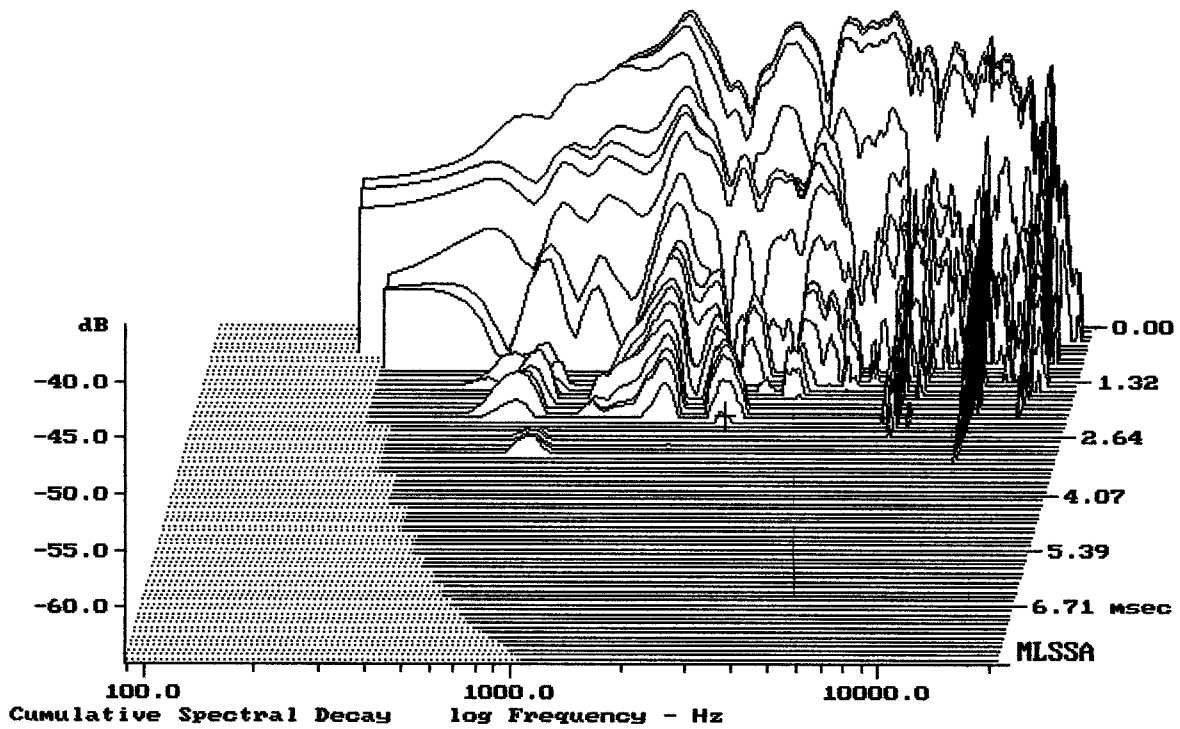


-64.34 dB, 2486 Hz (56), 2.310 msec (22)

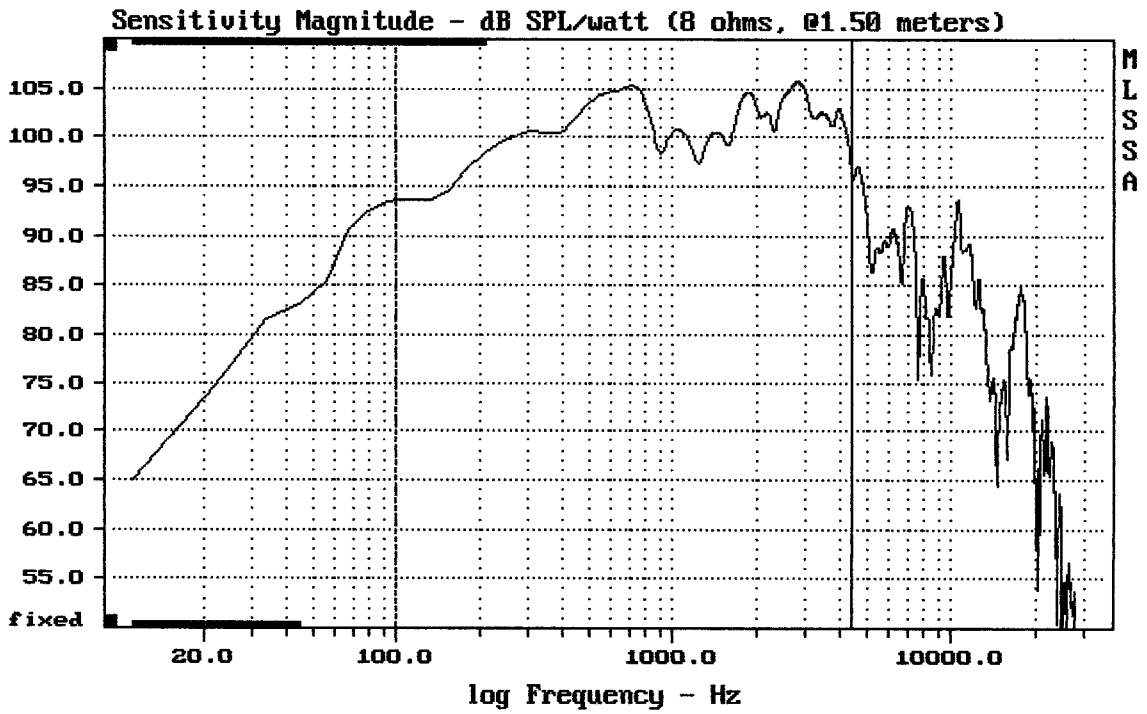

Level (100:4406 Hz) = 101.50 dB SPL/watt (8 ohms, @1.00 meters)

CX15N251

MLSSA: Frequency Domain

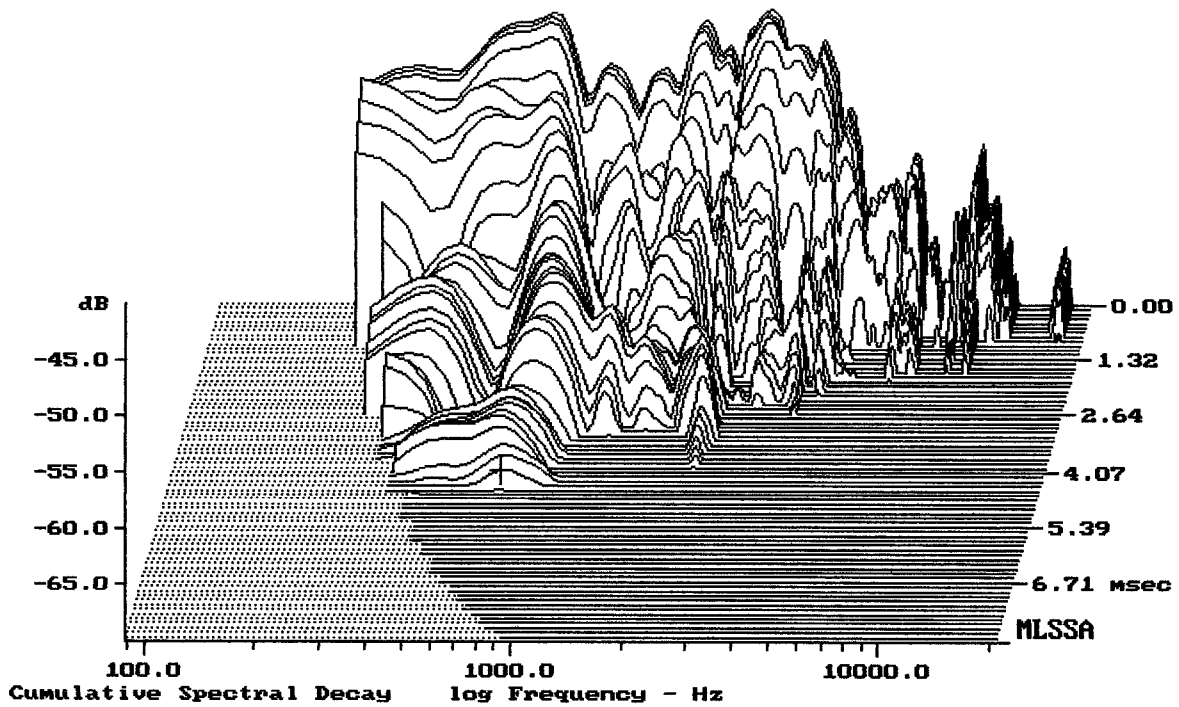

-68.57 dB, 710 Hz (16), 4.400 msec (41)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.49	Ohms
2	Fs	49.81	Hz
3	Re	5.01	Ohms[dc]
4	Res	73.15	Ohms
5	Qms	5.58	
6	Qes	0.38	
7	Qts	0.36	
8	L1	0.38	mH
9	L2	0.89	mH
10	R2	3.38	Ohms
11	RMSE-load	0.70	Ohms
12	Vas(Sd)	198.29	liters
13	Mms	49.22	grams
14	Cms	207	$\mu\text{M}/\text{Newton}$
15	B1	14.21	Tesla-M
16	SPLref(Sd)	99.9	dB[Re]
17	Rub-index	0.12	

Method: Mass-loaded (40.00 grams)

Area (Sd): 825.00 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -23.9% (-20% to -50% is recommended).

CX15N251

MLSSA: Parameters

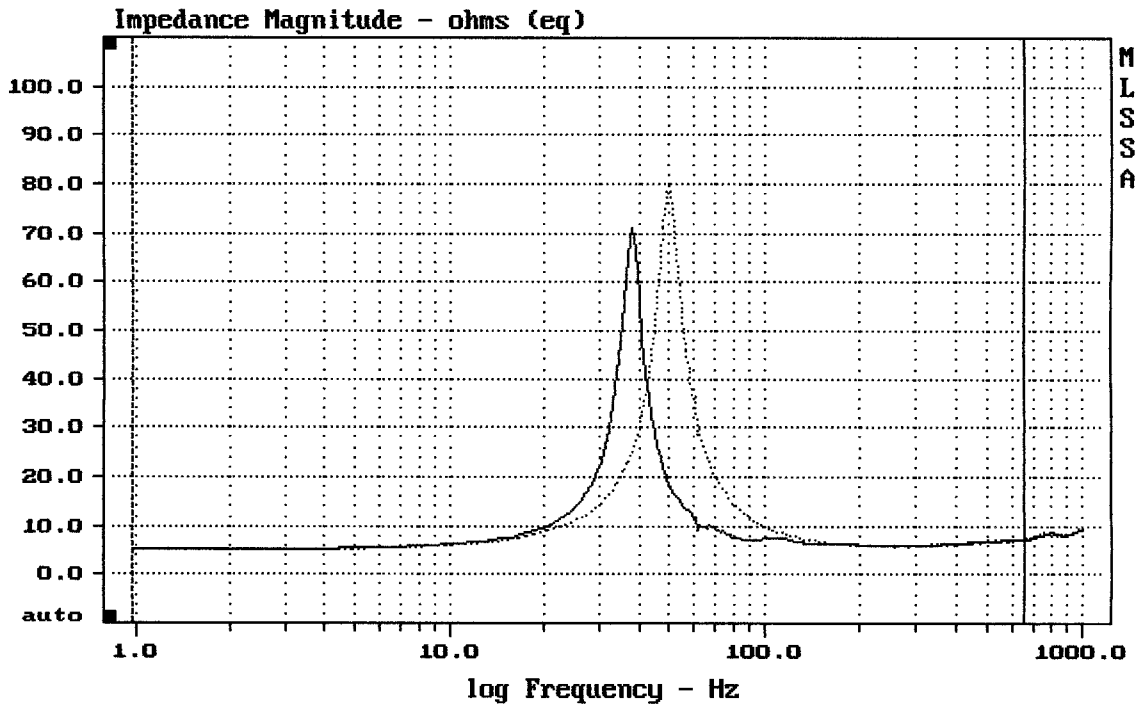

mean: 8.857, rms: 12.69, std: 9.082, max: 79.69, min: 5.084

MLSSA: Frequency Domain