



Level (100:3196 Hz) = 99.18 dB SPL/watt (8 ohms, @1.50 meters)

CX15N351

MLSSA: Frequency Domain

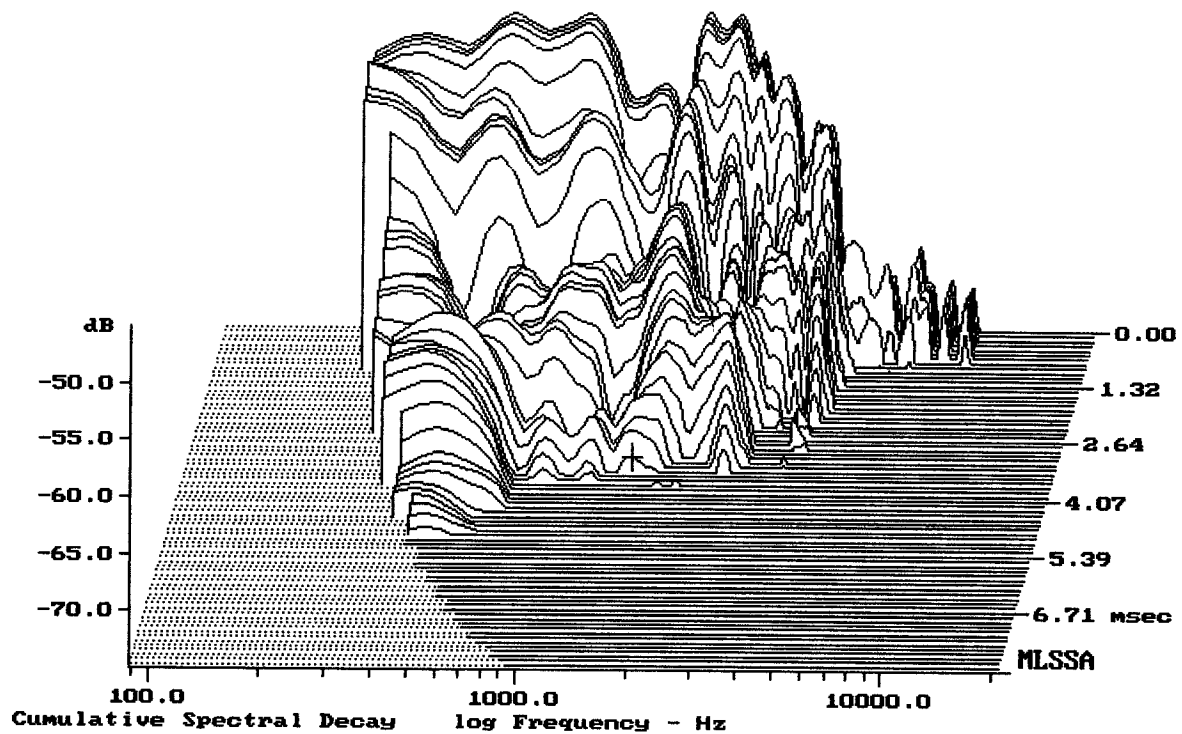


-73.80 dB, 1465 Hz (33), 3.410 msec (32)

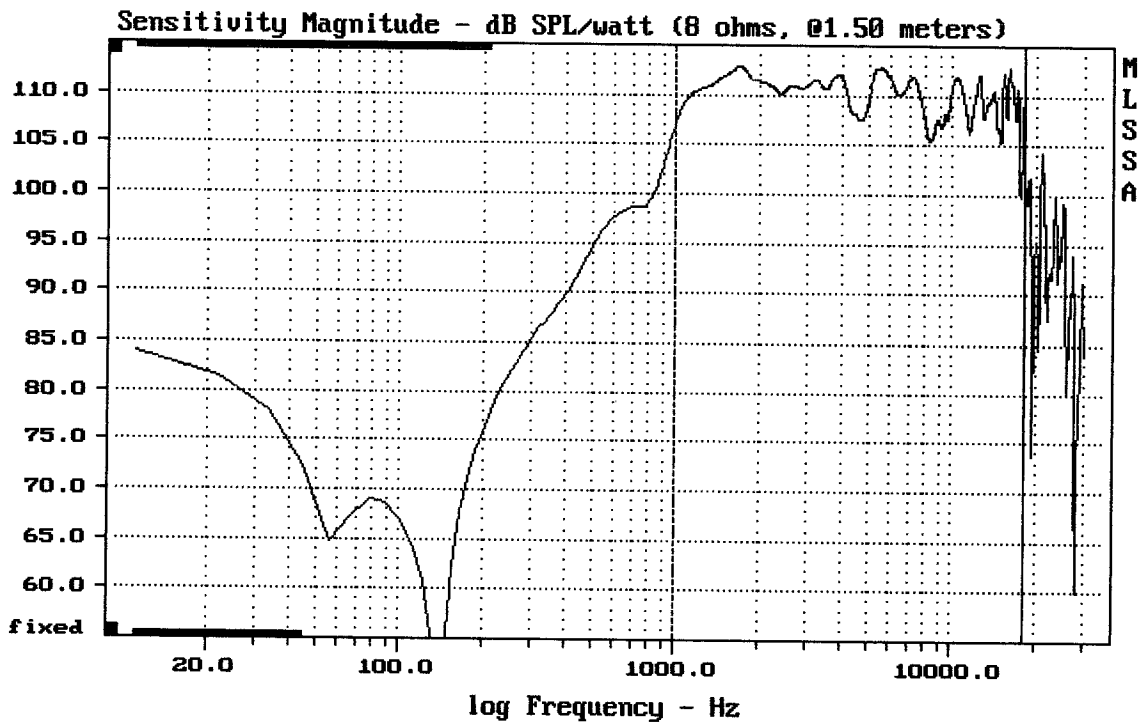

Level (999:18200 Hz) = 110.56 dB SPL/watt (8 ohms, @1.50 meters)

CX15N351

MLSSA: Frequency Domain

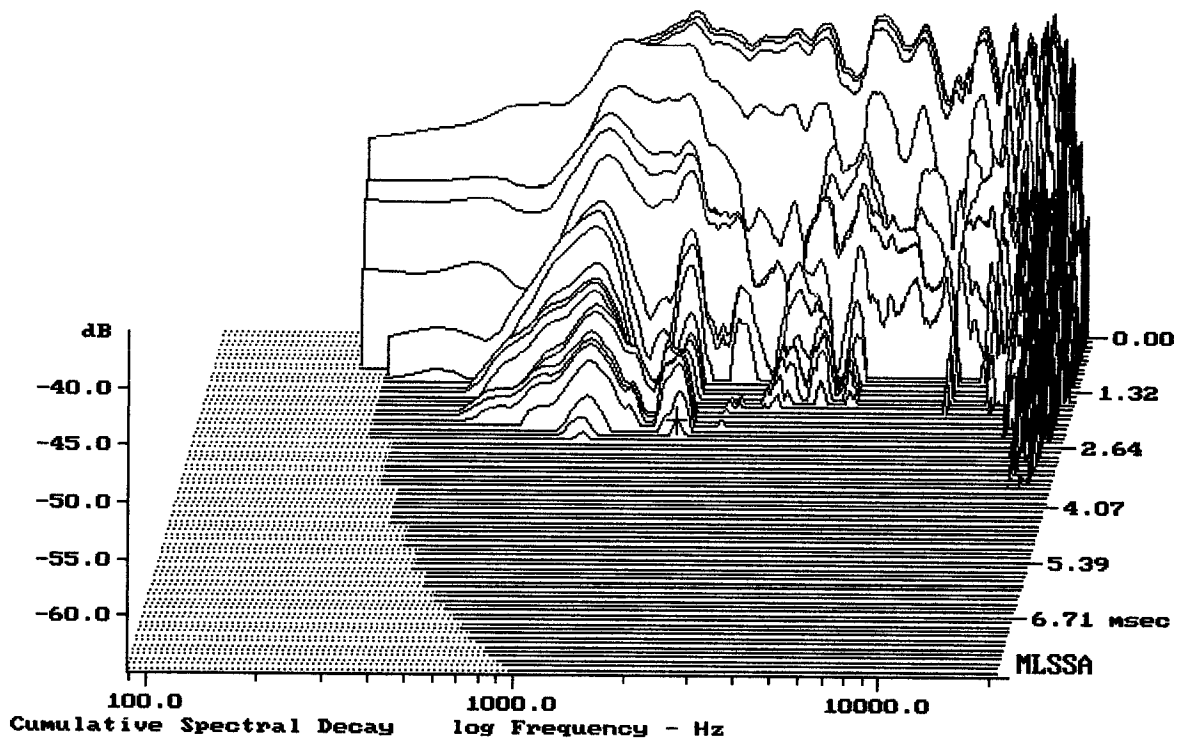

-63.75 dB, 1820 Hz (41), 2.420 msec (23)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.67	Ohms
2	Fs	69.26	Hz
3	Re	5.60	Ohms[dc]
4	Res	148.84	Ohms
5	Qms	10.23	
6	Qes	0.38	
7	Qts	0.37	
8	L1	0.85	mH
9	L2	1.44	mH
10	R2	6.21	Ohms
11	RMSE-load	2.16	Ohms
12	Vas(Sd)	65.52	liters
13	Mms	68.87	grams
14	Cms	77	$\mu\text{M}/\text{Newton}$
15	B1	20.88	Tesla-M
16	SPLref(Sd)	99.4	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (70.00 grams)

Area (Sd): 780.00 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -28.8% (-20% to -50% is recommended).

CX15N351

MLSSA: Parameters

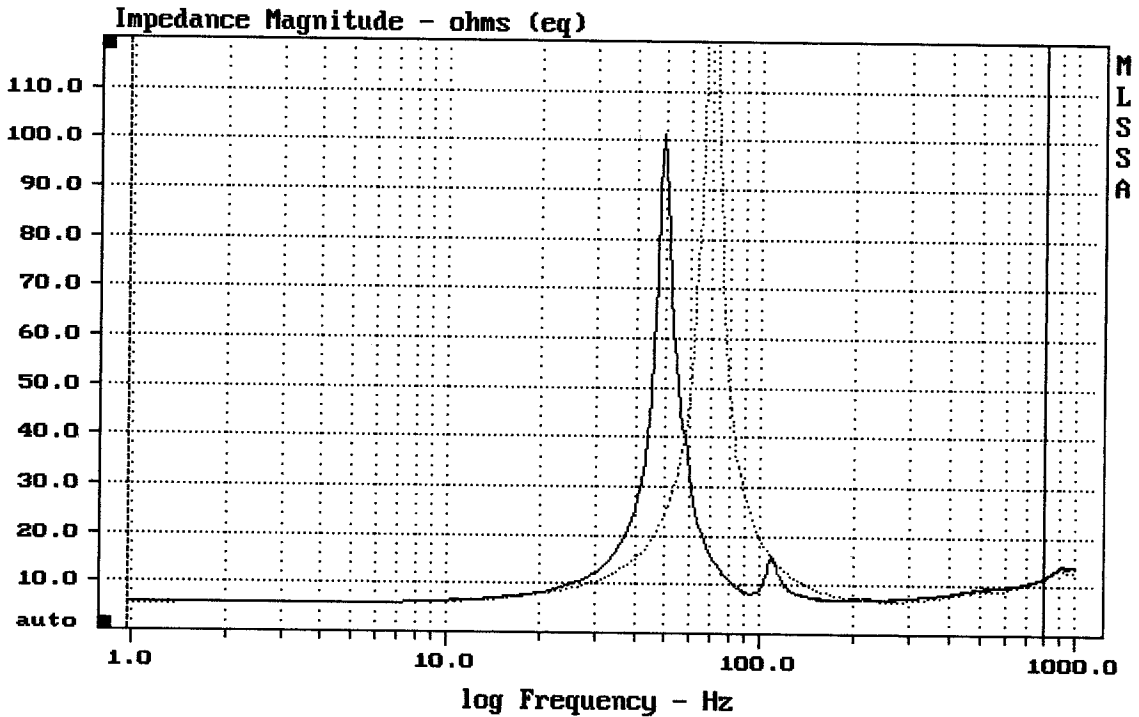

mean: 12.08, rms: 19.31, std: 15.07, max: 157, min: 5.636

CX15N351

MLSSA: Frequency Domain