


Level (100:6004 Hz) = 97.64 dB SPL/watt (8 ohms, @1.00 meters)

L12/854K

MLSSA: Frequency Domain

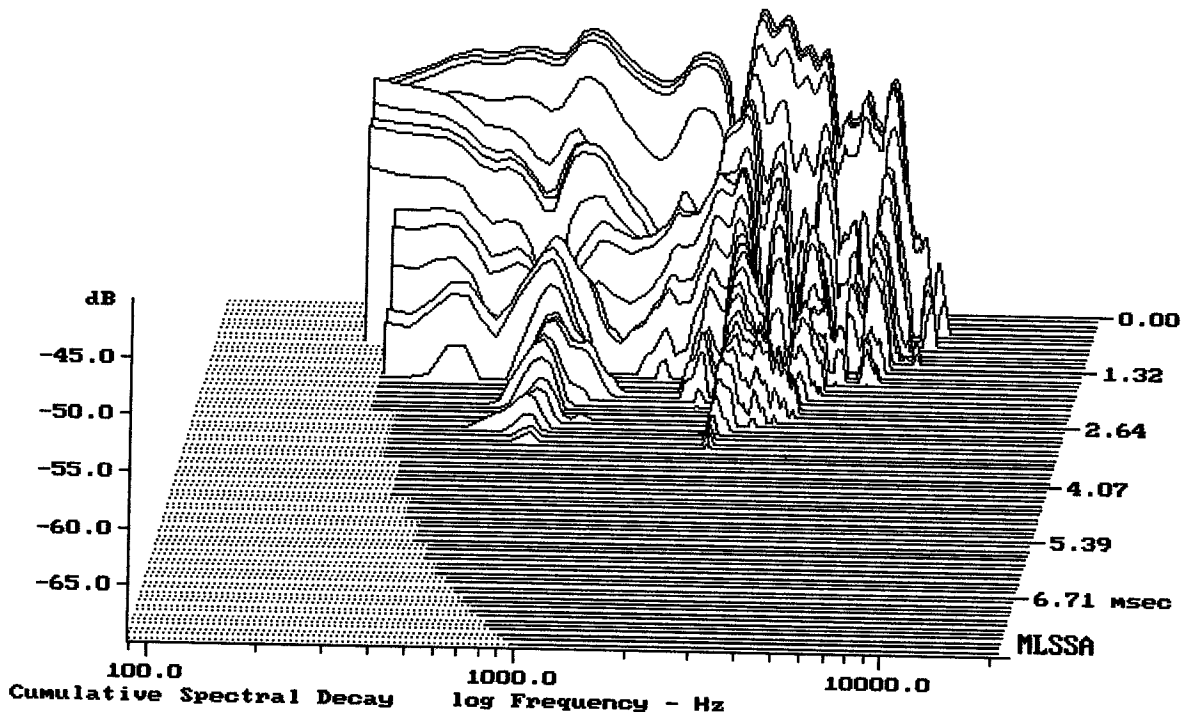

-69.01 dB, 2308 Hz (52), 3.190 msec (30)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.56	Ohms
2	Fs	66.04	Hz
3	Re	5.42	Ohms[dc]
4	Res	44.74	Ohms
5	Qms	3.58	
6	Qes	0.43	
7	Qts	0.39	
8	L1	0.82	mH
9	L2	1.29	mH
10	R2	3.31	Ohms
11	RMSE-load	0.61	Ohms
12	Vas(Sd)	72.43	liters
13	Mms	31.74	grams
14	Cms	183	$\mu\text{M}/\text{Newton}$
15	Bl	12.83	Tesla-M
16	SPLref(Sd)	98.7	dB[Re]
17	Rub-index	0.02	

Method: Mass-loaded (70.00 grams)

Area (Sd): 530.93 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -40.0% (-20% to -50% is recommended).

L12/854K

MLSSA: Parameters

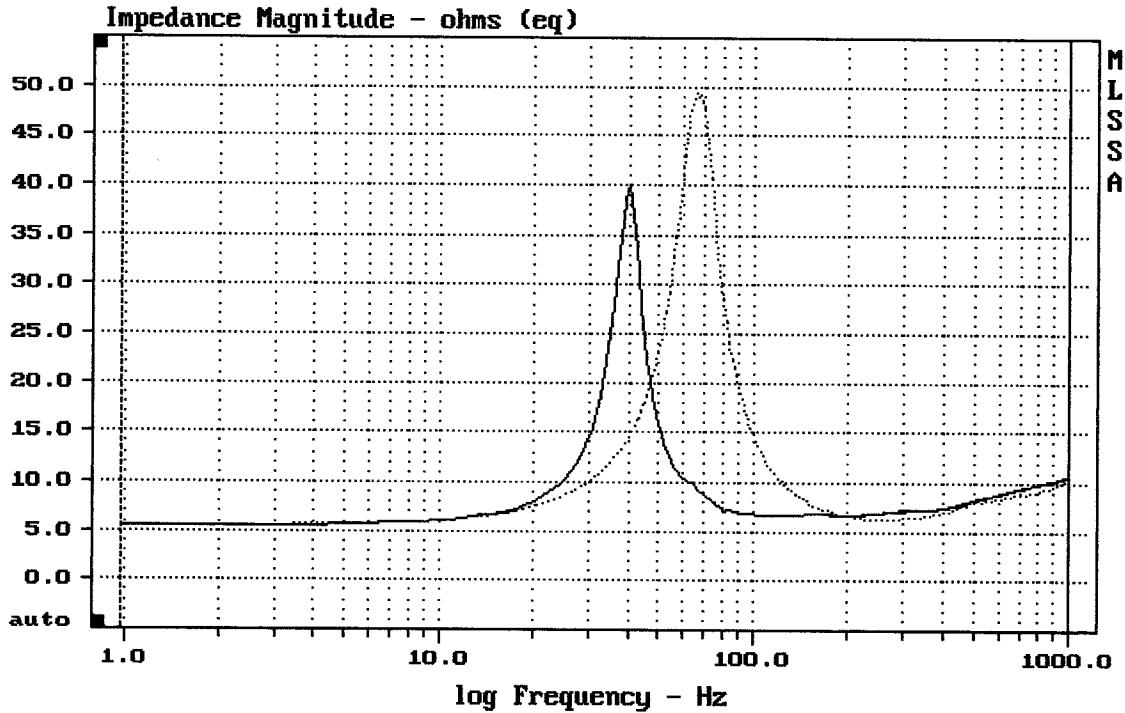

mean: 9.545, rms: 11.2, std: 5.857, max: 49.27, min: 5.503

DTTO

MLSSA: Frequency Domain