

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.87	Ohms
2	Fs	38.98	Hz
3	Re	6.73	Ohms[dc]
4	Res	53.93	Ohms
5	Qms	3.90	
6	Qes	0.49	
7	Qts	0.43	
8	L1	1.31	mH
9	L2	2.25	mH
10	R2	11.42	Ohms
11	RMSE-load	0.79	Ohms
12	Vas(Sd)	153.92	liters
13	Mms	195.70	grams
14	Cms	85	$\mu\text{M}/\text{Newton}$
15	B1	25.74	Tesla-M
16	SPLref(Sd)	94.6	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (140.00 grams)

Area (Sd): 1134.11 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -22.1% (-20% to -50% is recommended).

RCF L18P200-N


MLSSA: Parameters

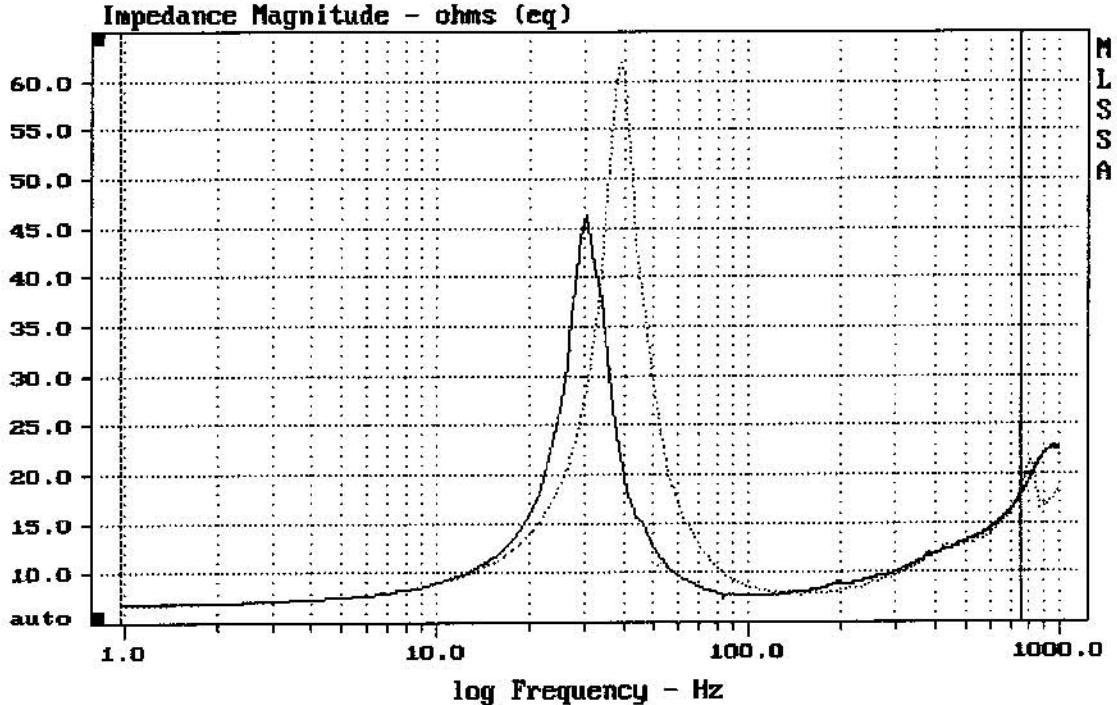

mean: 12.86, rms: 14.31, std: 6.281, max: 61.89, min: 6.846

DTTO


MLSSA: Frequency Domain

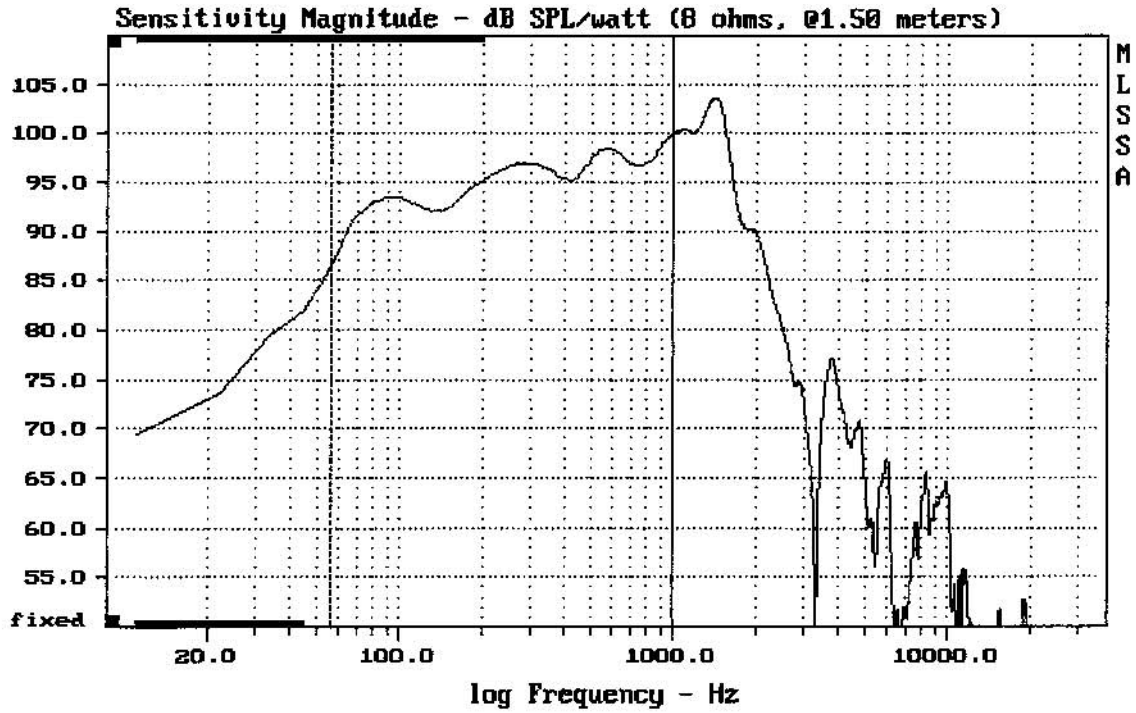

Level (55:999 Hz) = 95.55 dB SPL/watt (8 ohms, @1.50 meters)

RCF L18P200-N

MLSSA: Frequency Domain

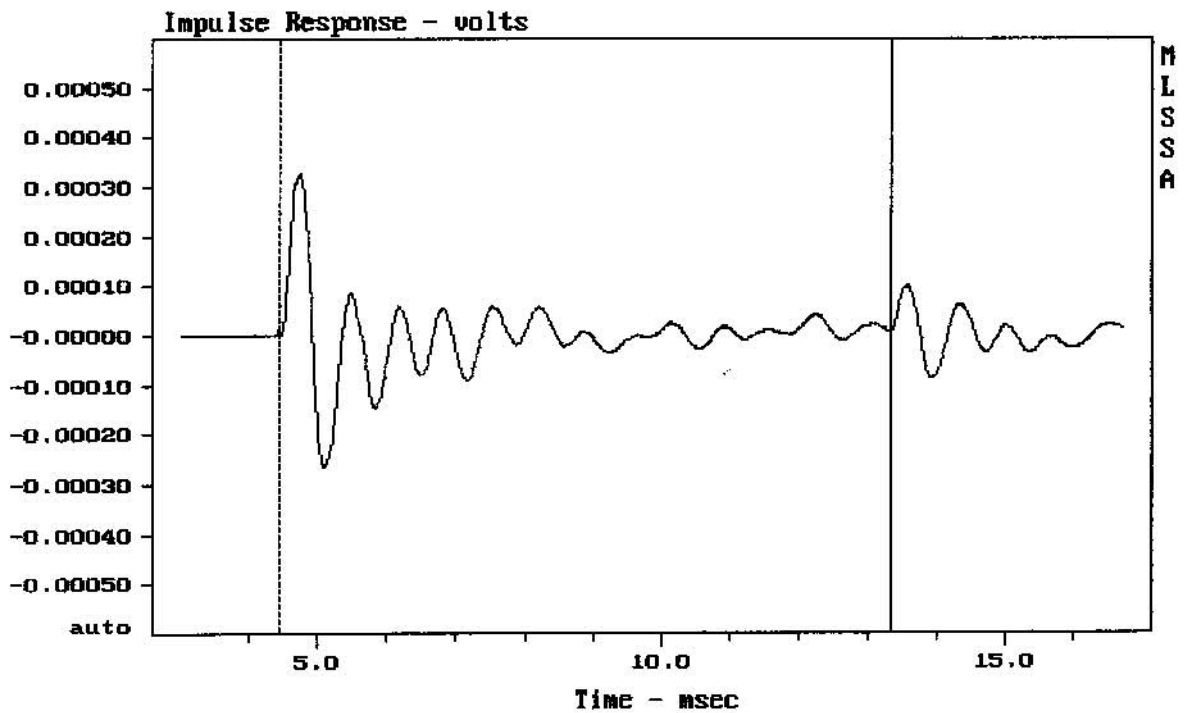

mean: 0.200e-007, rms: 7.480e-005, std: 7.480e-005, max: 0.0003277, min: -0.00

RCF L18P200-N