

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

| Line | Parameter | Value | Units |
|------|------------|--------|-----------------------------|
| 1 | RMSE-free | 0.65 | Ohms |
| 2 | Fs | 42.06 | Hz |
| 3 | Re | 4.88 | Ohms[dc] |
| 4 | Res | 88.74 | Ohms |
| 5 | Qms | 7.21 | |
| 6 | Qes | 0.40 | |
| 7 | Qts | 0.38 | |
| 8 | L1 | 1.45 | mH |
| 9 | L2 | 2.17 | mH |
| 10 | R2 | 9.16 | Ohms |
| 11 | RMSE-load | 0.98 | Ohms |
| 12 | Vas(Sd) | 166.13 | liters |
| 13 | Mms | 160.07 | grams |
| 14 | Cms | 89 | $\mu\text{M}/\text{Newton}$ |
| 15 | B1 | 22.82 | Tesla-M |
| 16 | SPLref(Sd) | 96.8 | dB[Re] |
| 17 | Rub-index | 0.02 | |

Method: Mass-loaded (120.00 grams)

Area (Sd): 1150.00 sq cm


DCR mode: Measure (-0.06 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -24.1% (-20% to -50% is recommended).


RCF L18P300

MLSSA: Parameters

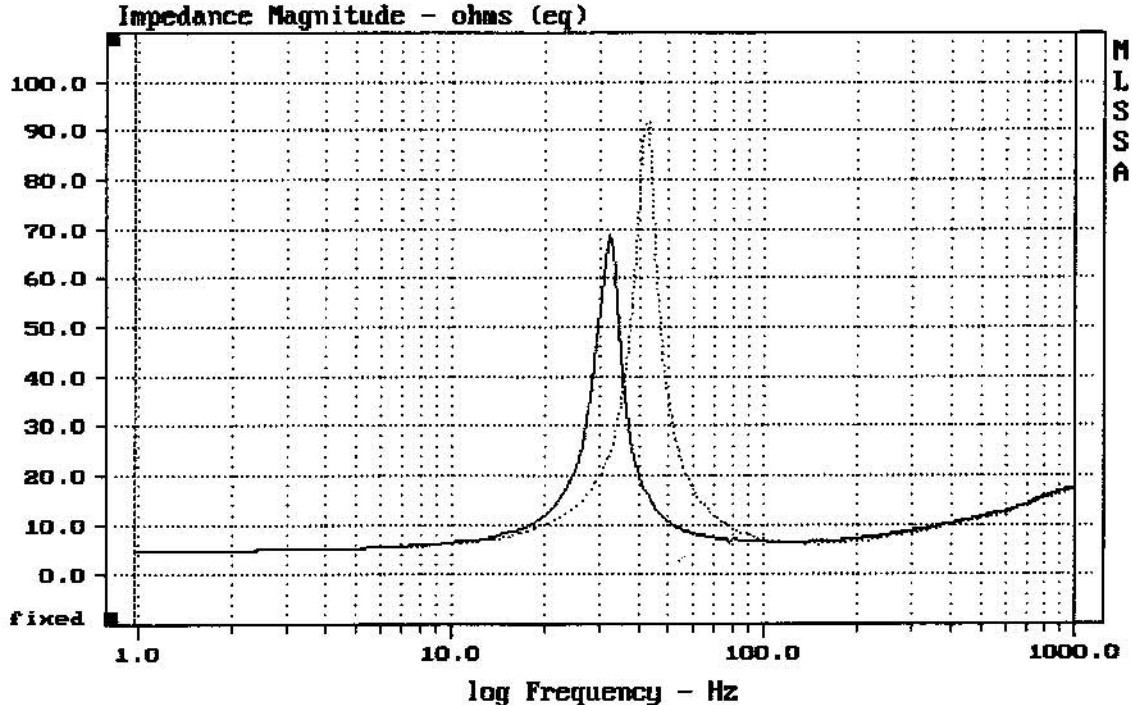

mean: 12.59, rms: 14.66, std: 7.516, max: 91.83, min: 4.944


MLSSA: Frequency Domain

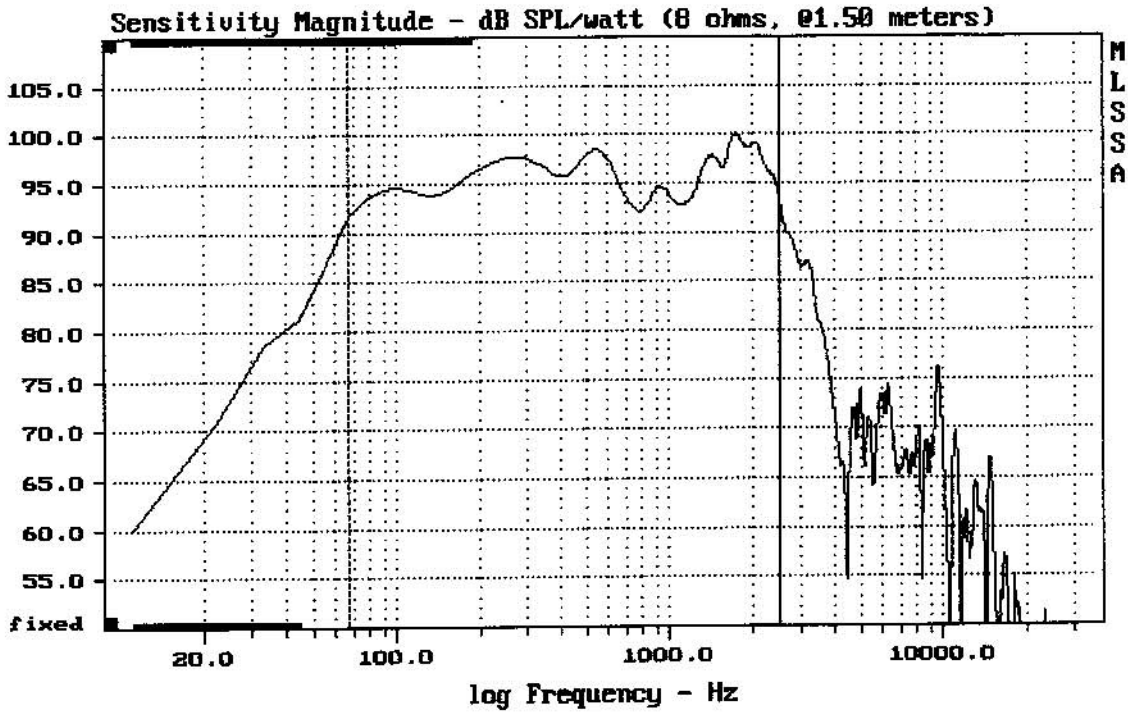

Level (67:2497 Hz) = 96.06 dB SPL/watt (8 ohms, @1.50 meters)

L18P300

MLSSA: Frequency Domain

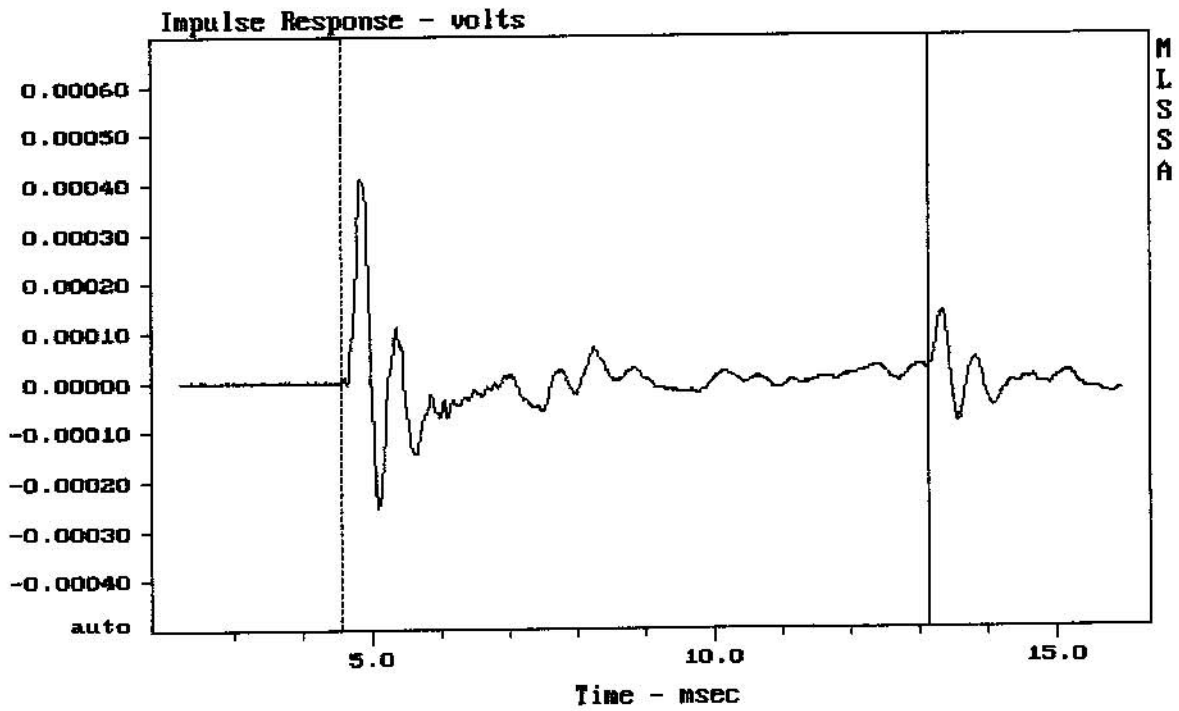

mean: 6.78e-007, rms: 6.956e-005, std: 6.955e-005, max: 0.0004105, min: -0.000

L18P300