

Line	Parameter	Value	Units
1	RMSE-free	0.54	Ohms
2	Fs	64.54	Hz
3	Re	5.56	Ohms[dc]
4	Res	101.83	Ohms
5	Qms	6.38	
6	Qes	0.35	
7	Qts	0.33	
8	L1	1.14	mH
9	L2	1.79	mH
10	R2	5.29	Ohms
11	RMSE-load	0.64	Ohms
12	Vas(Sd)	45.92	liters
13	Mms	52.43	grams
14	Cms	116	$\mu\text{M}/\text{Newton}$
15	Bl	18.42	Tesla-M
16	SPLref(Sd)	97.3	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (60.00 grams)

Area (Sd): 530.93 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -30.7% (-20% to -50% is recommended).


RCF LF12G301

MLSSA: Parameters

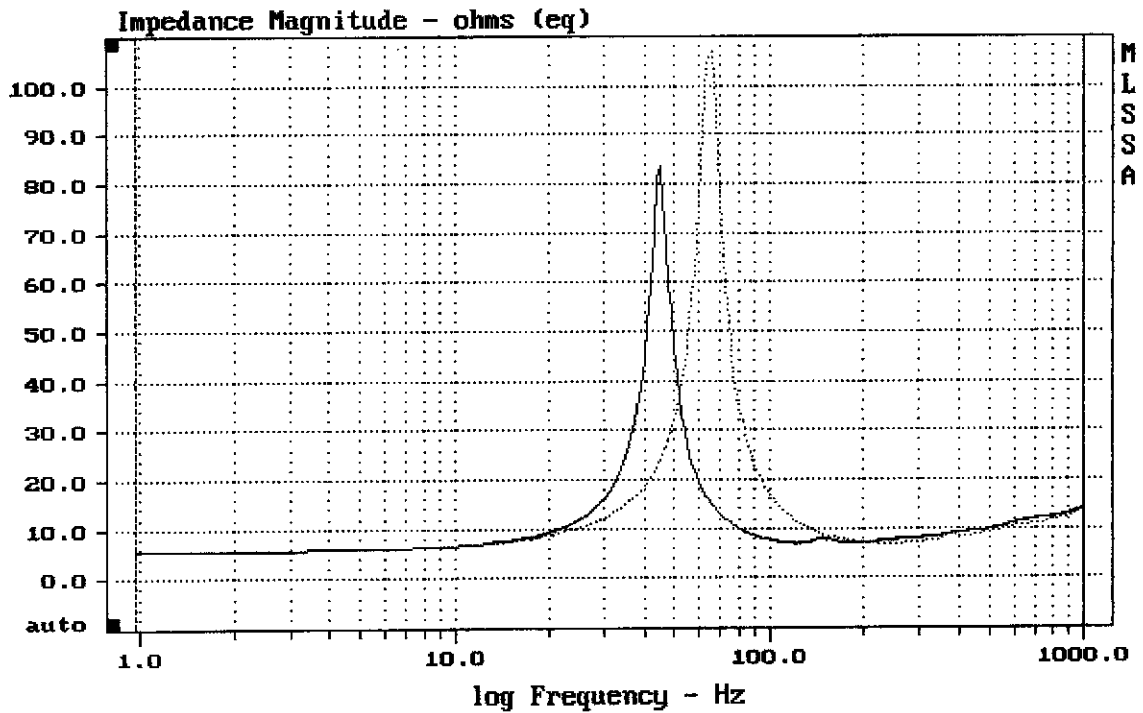

mean: 12.09, rms: 16.17, std: 10.73, max: 106.8, min: 5.646


MLSSA: Frequency Domain

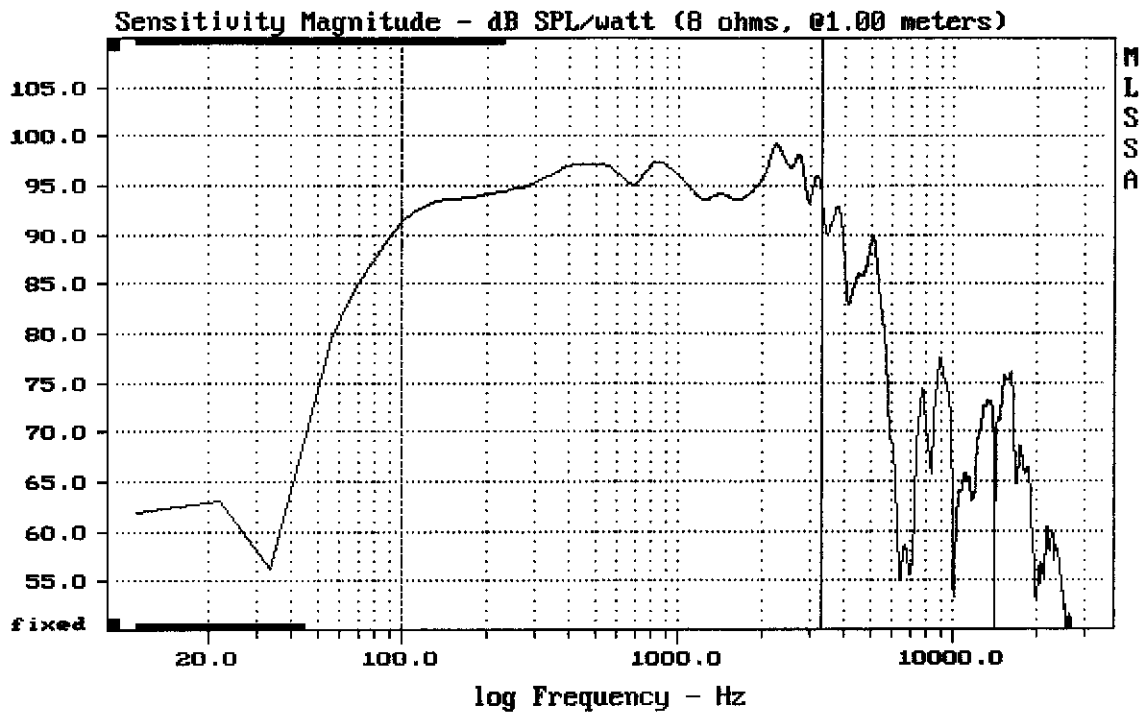

Level (100:3307 Hz) = 95.52 dB SPL/watt (8 ohms, @1.00 meters)

RCF LF12G301

MLSSA: Frequency Domain

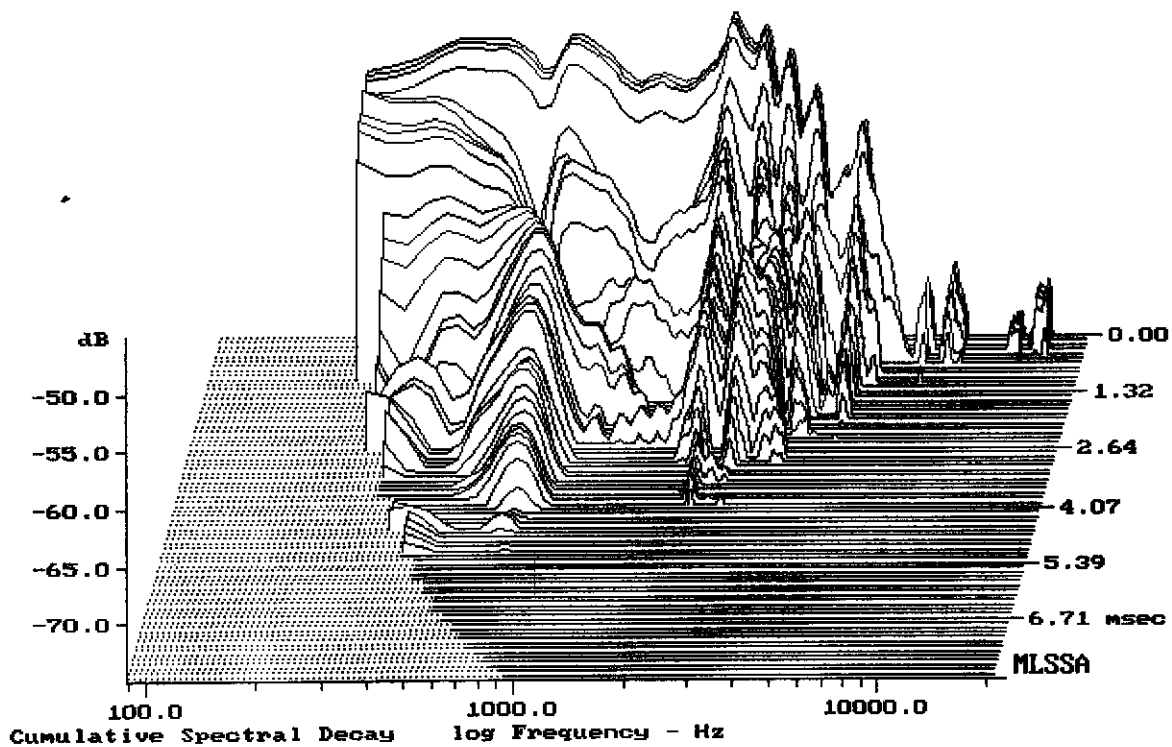

-73.96 dB, 2219 Hz (50), 3.960 msec (37)