


Level (55:2697 Hz) = 96.46 dB SPL/watt (8 ohms, @1.50 meters)

L18P300-ND

MLSSA: Frequency Domain

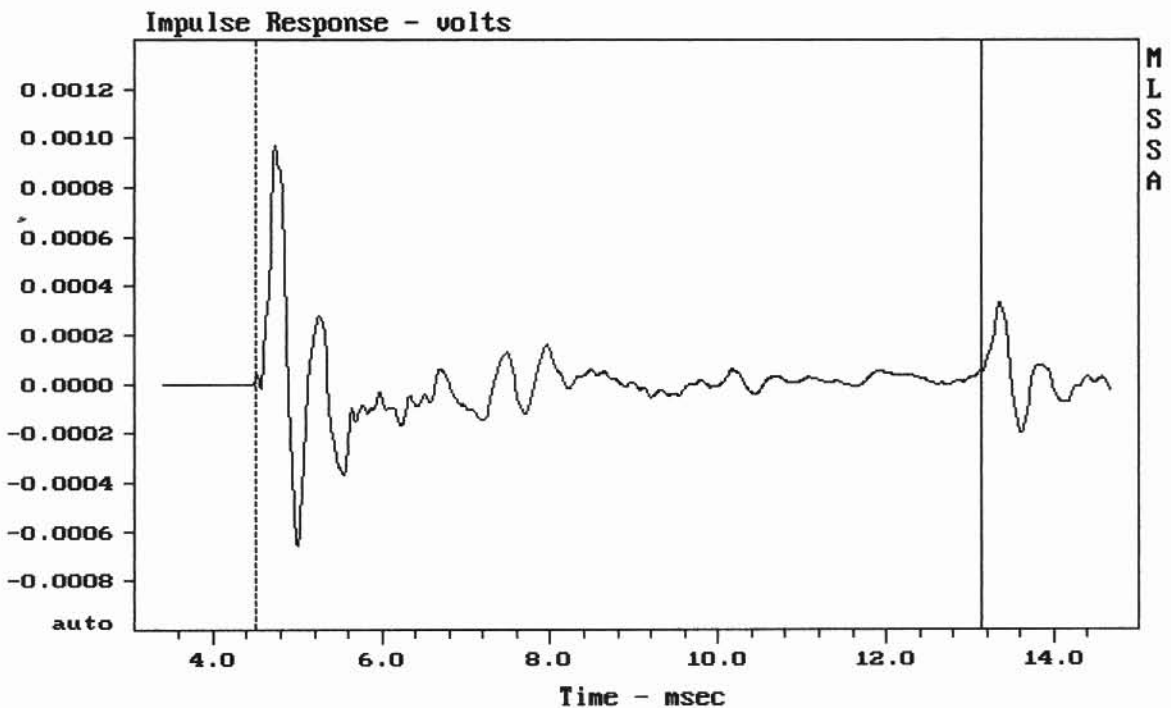

mean: 3.913e-007, rms: 0.0001627, std: 0.0001627, max: 0.0009725, min: -0.0006

L18P300-ND

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.93	Ohms
2	Fs	44.77	Hz
3	Re	4.67	Ohms[dc]
4	Res	82.89	Ohms
5	Qms	7.38	
6	Qes	0.42	
7	Qts	0.39	
8	L1	1.18	mH
9	L2	1.94	mH
10	R2	9.93	Ohms
11	RMSE-load	0.81	Ohms
12	Vas(Sd)	144.89	liters
13	Mms	165.99	grams
14	Cms	76	$\mu\text{M}/\text{Newton}$
15	Bl	22.91	Tesla-M
16	SPLref(Sd)	96.8	dB[Re]
17	Rub-index	0.03	

Method: Mass-loaded (140.00 grams)

Area (Sd): 1164.16 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -26.6% (-20% to -50% is recommended).

L18P300-ND

MLSSA: Parameters

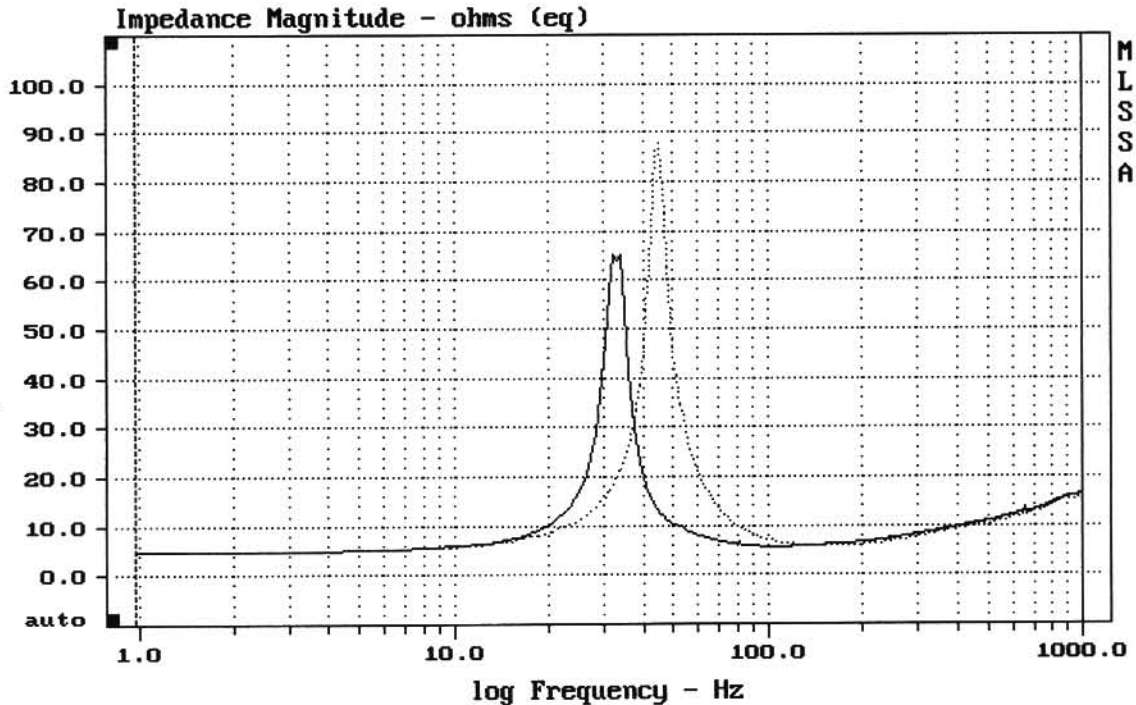

mean: 11.77, rms: 13.76, std: 7.129, max: 87.7, min: 4.712

MLSSA: Frequency Domain