


Level (100:1998 Hz) = 96.75 dB SPL/watt (8 ohms, @1.00 meters)

MB12N407

MLSSA: Frequency Domain

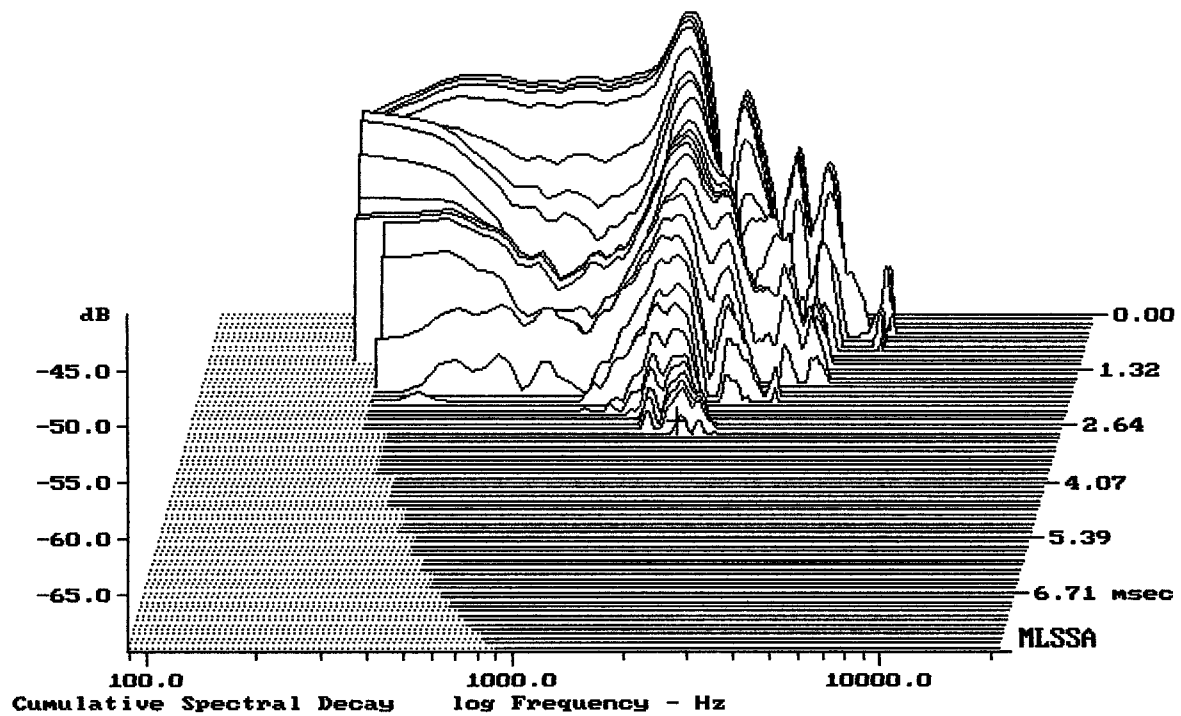

-68.84 dB, 1909 Hz (43), 2.860 msec (27)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	2.36	Ohms
2	Fs	57.22	Hz
3	Re	4.96	Ohms[dc]
4	Res	143.19	Ohms
5	Qms	6.96	
6	Qes	0.24	
7	Qts	0.23	
8	L1	0.75	mH
9	L2	1.45	mH
10	R2	6.13	Ohms
11	RMSE-load	0.65	Ohms
12	Vas(Sd)	39.25	liters
13	Mms	84.21	grams
14	Cms	92	$\mu\text{M}/\text{Newton}$
15	B1	24.95	Tesla-M
16	SPLref(Sd)	96.7	dB[Re]
17	Rub-index	0.42	

Method: Mass-loaded (80.00 grams)

Area (Sd): 551.55 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -27.9% (-20% to -50% is recommended).

MB12N407

MLSSA: Parameters

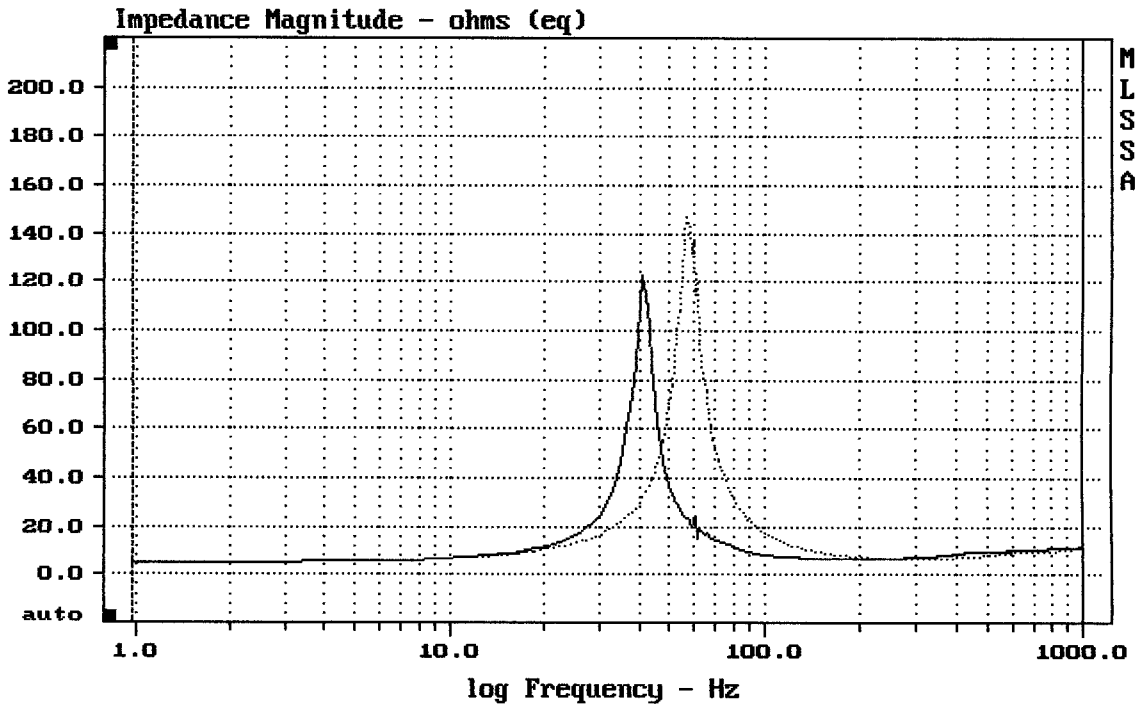

mean: 11.75, rms: 18.54, std: 14.34, max: 146.6, min: 5.053

MLSSA: Frequency Domain