

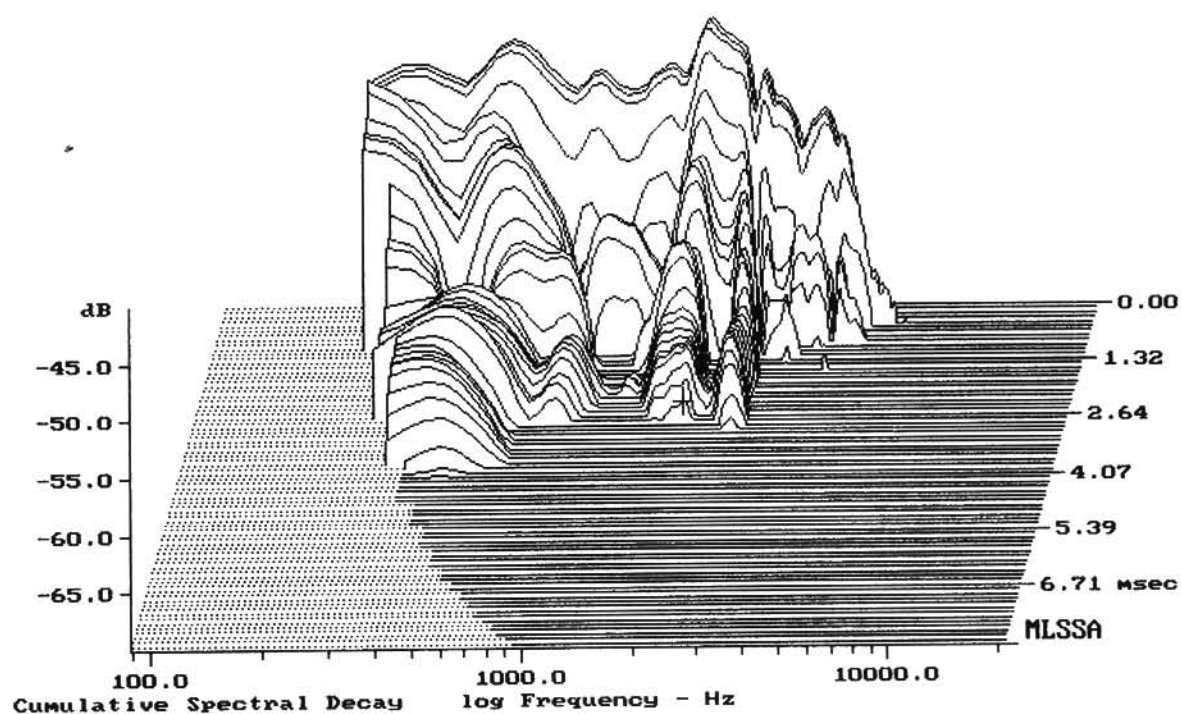

---

Level (100:4006 Hz) = 99.94 dB SPL/watt (8 ohms, @1.50 meters)

---

RCF MB15N351

MLSSA: Frequency Domain



-68.23 dB, 1864 Hz (42), 2.750 msec (26)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.82	Ohms
2	Fs	65.67	Hz
3	Re	5.73	Ohms[dc]
4	Res	132.24	Ohms
5	Qms	7.48	
6	Qes	0.32	
7	Qts	0.31	
8	L1	0.69	mH
9	L2	1.92	mH
10	R2	7.01	Ohms
11	RMSE-load	2.11	Ohms
12	Vas(Sd)	106.96	liters
13	Mms	56.41	grams
14	Cms	104	$\mu\text{M}/\text{Newton}$
15	B1	20.28	Tesla-M
16	SPLref(Sd)	101.5	dB[Re]
17	Rub-index	0.02	

Method: Mass-loaded (80.00 grams)

Area (Sd): 855.30 sq cm

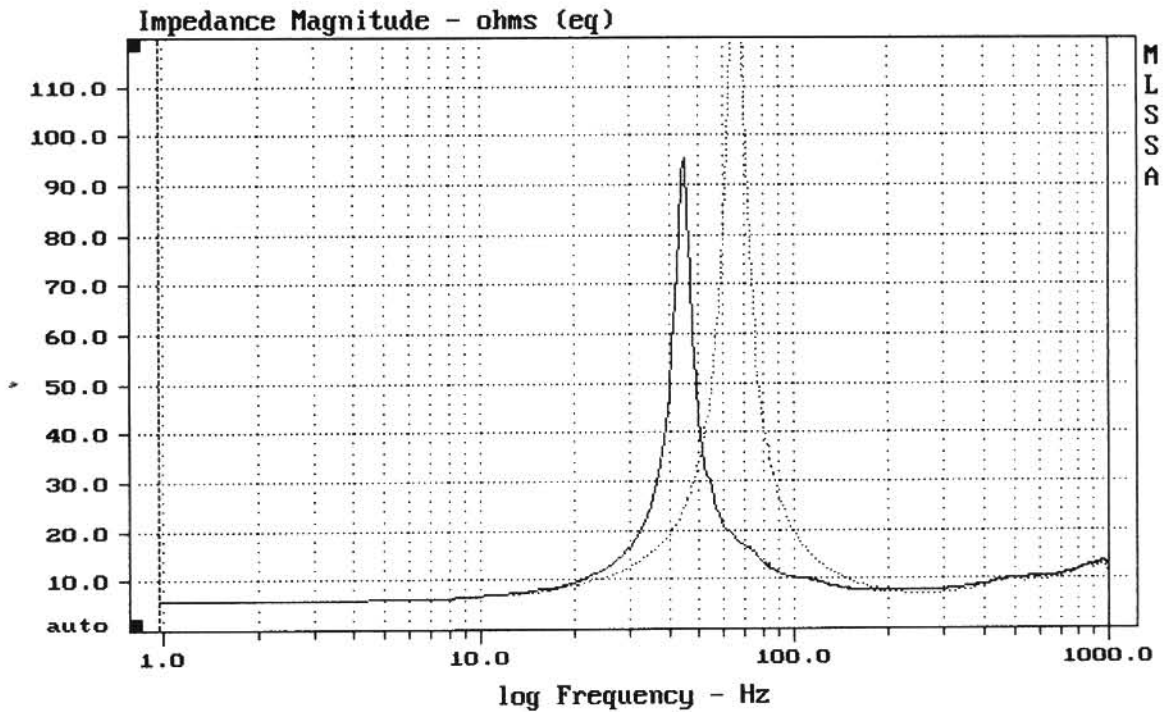
DCR mode: Measure (-0.06 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -32.4% (-20% to -50% is recommended).

RCF MB15N351

MLSSA: Parameters



mean: 12.64, rms: 18.37, std: 13.33, max: 138.7, min: 5.766

MLSSA: Frequency Domain