


Level (100:4506 Hz) = 98.75 dB SPL/watt (8 ohms, @1.50 meters)

RFT 15.5" ORIG.

MLSSA: Frequency Domain

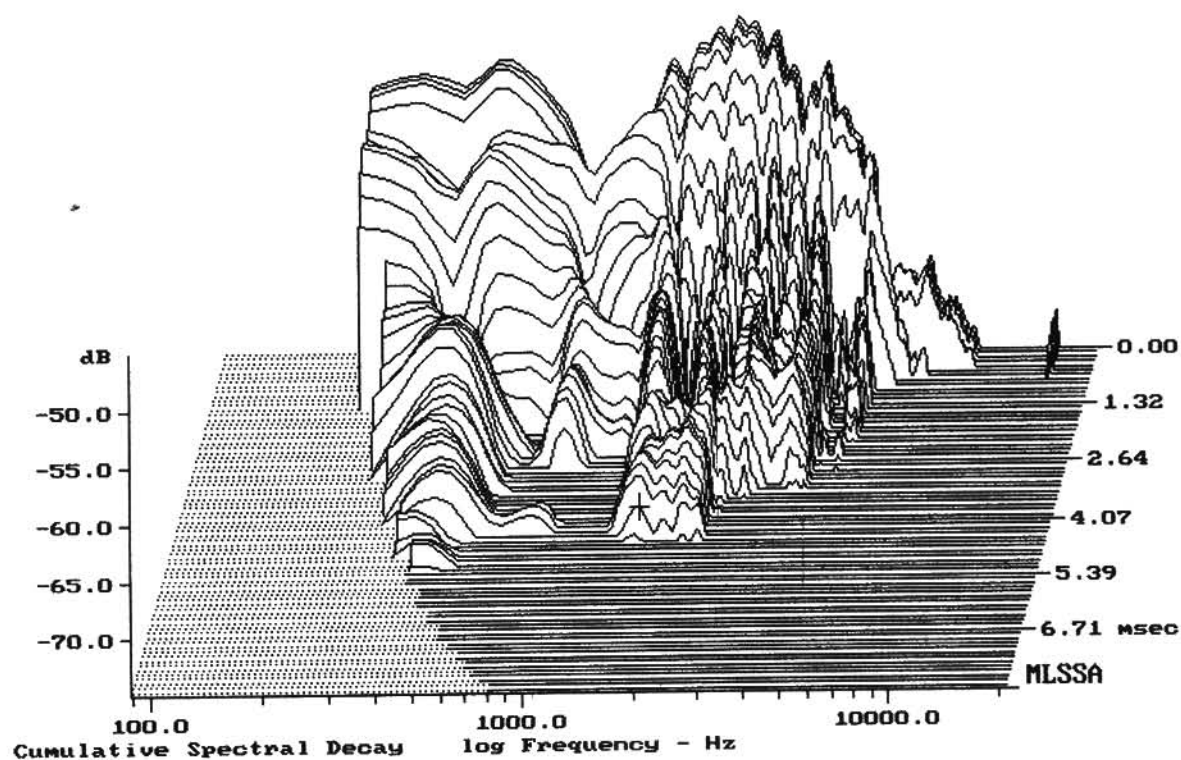

-72.38 dB, 1598 Hz (36), 4.400 msec (41)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.19	Ohms
2	Fs	50.18	Hz
3	Re	3.04	Ohms[dc]
4	Res	17.38	Ohms
5	Qms	2.67	
6	Qes	0.47	
7	Qts	0.40	
8	L1	0.81	mH
9	L2	1.04	mH
10	R2	3.33	Ohms
11	RMSE-load	0.54	Ohms
12	Vas(Sd)	237.05	liters
13	Mms	49.14	grams
14	Cms	205	$\mu\text{M}/\text{Newton}$
15	Bl	10.04	Tesla-M
16	SPLref(Sd)	99.9	dB[Re]
17	Rub-index	0.02	

Method: Mass-loaded (80.00 grams)

Area (Sd): 907.92 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -32.6% (-20% to -50% is recommended).

RFT 15.5" ORIG.

MLSSA: Parameters

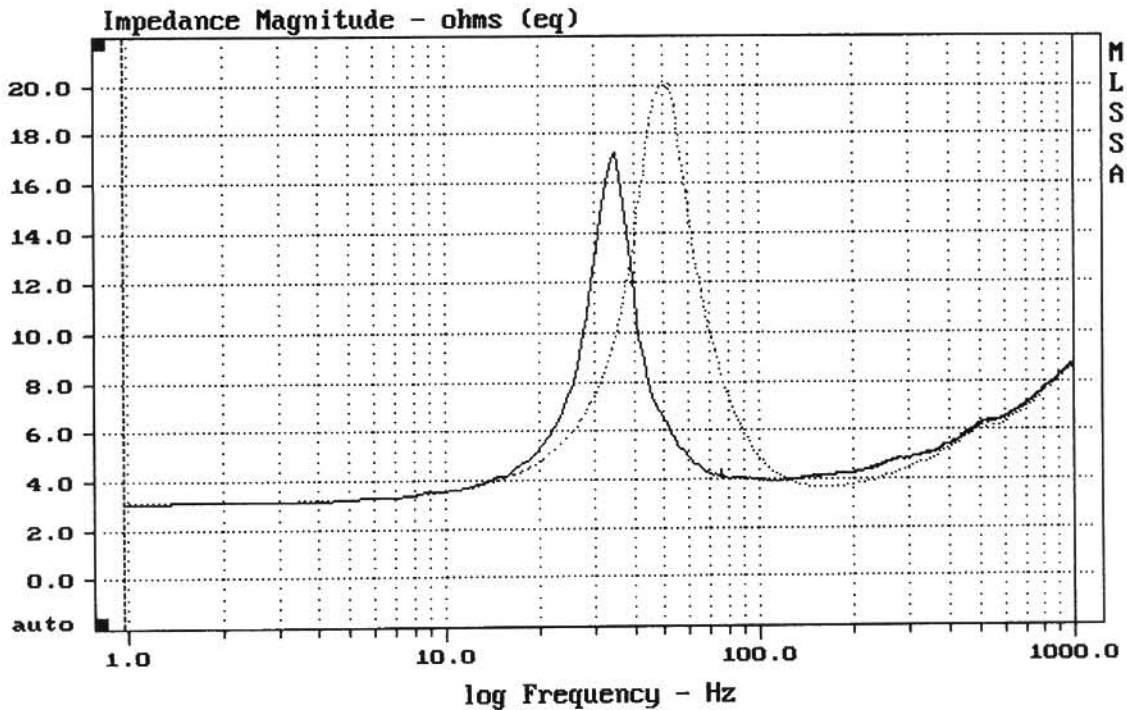

mean: 6.398, rms: 6.823, std: 2.368, max: 20.1, min: 3.112

MLSSA: Frequency Domain