


Level (55:2508 Hz) = 84.69 dB SPL/watt (4 ohms, @1.00 meters)

10SW11A

MLSSA: Frequency Domain

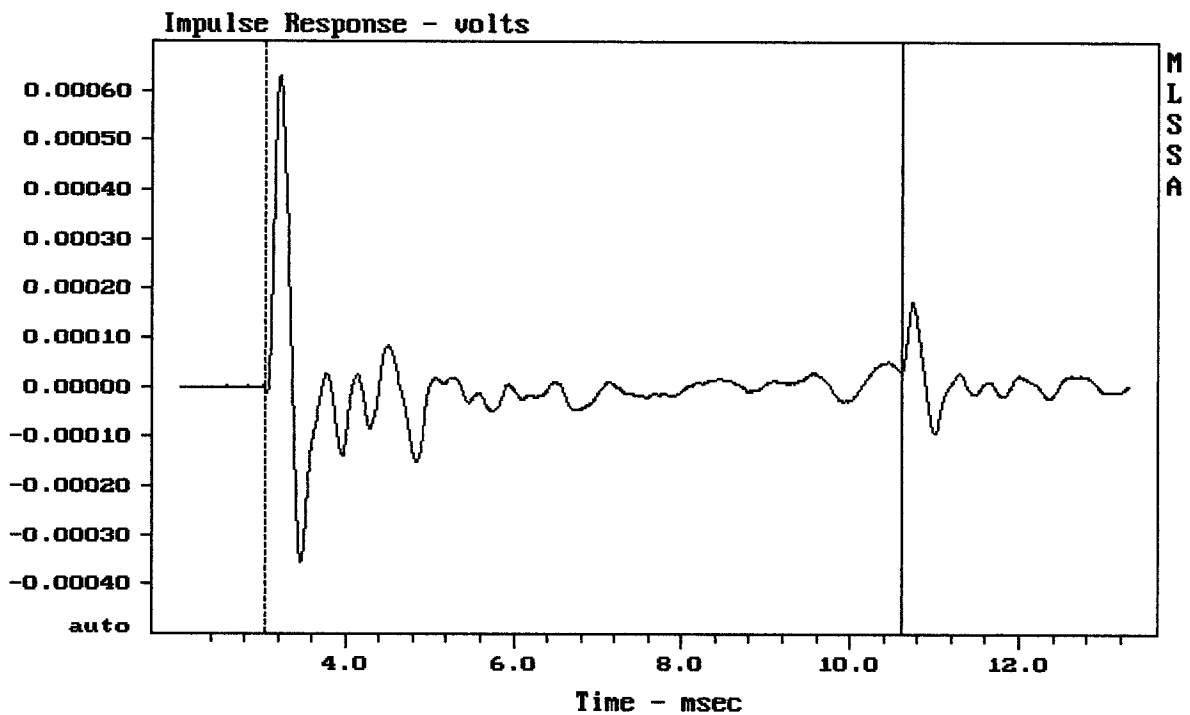

mean: -1.586e-006, rms: 9.819e-005, std: 9.817e-005, max: 0.0006313, min: -0.0

10SW11A

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.37	Ohms
2	Fs	39.23	Hz
3	Re	3.52	Ohms[dc]
4	Res	33.17	Ohms
5	Qms	12.75	
6	Qes	1.35	
7	Qts	1.22	
8	L1	0.46	mH
9	L2	0.80	mH
10	R2	3.87	Ohms
11	RMSE-load	0.34	Ohms
12	Vas(Sd)	48.23	liters
13	Mms	57.49	grams
14	Cms	286	$\mu\text{M}/\text{Newton}$
15	Bl	6.07	Tesla-M
16	SPLref(Sd)	85.2	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (40.00 grams)

Area (Sd): 346.36 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -22.1% (-20% to -50% is recommended).

10SW11A

MLSSA: Parameters

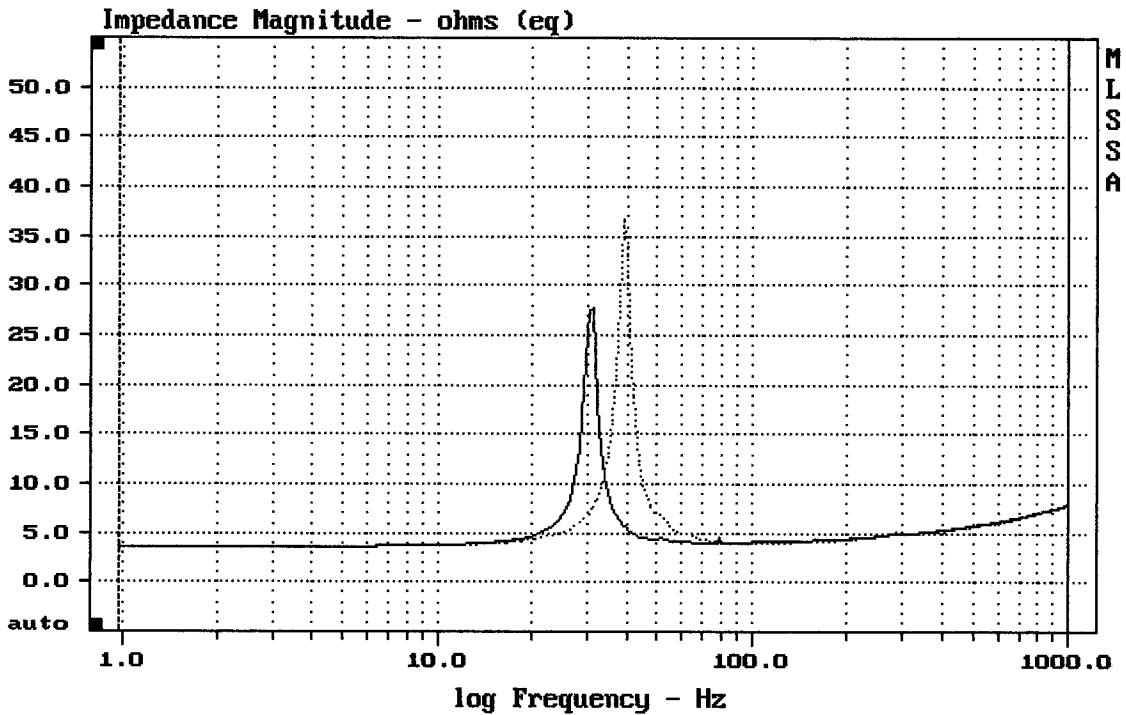

mean: 5.966, rms: 6.342, std: 2.153, max: 36.78, min: 3.591

MLSSA: Frequency Domain