


Level (100:3995 Hz) = 92.96 dB SPL/watt (8 ohms, @1.00 meters)

12CV5

MLSSA: Frequency Domain

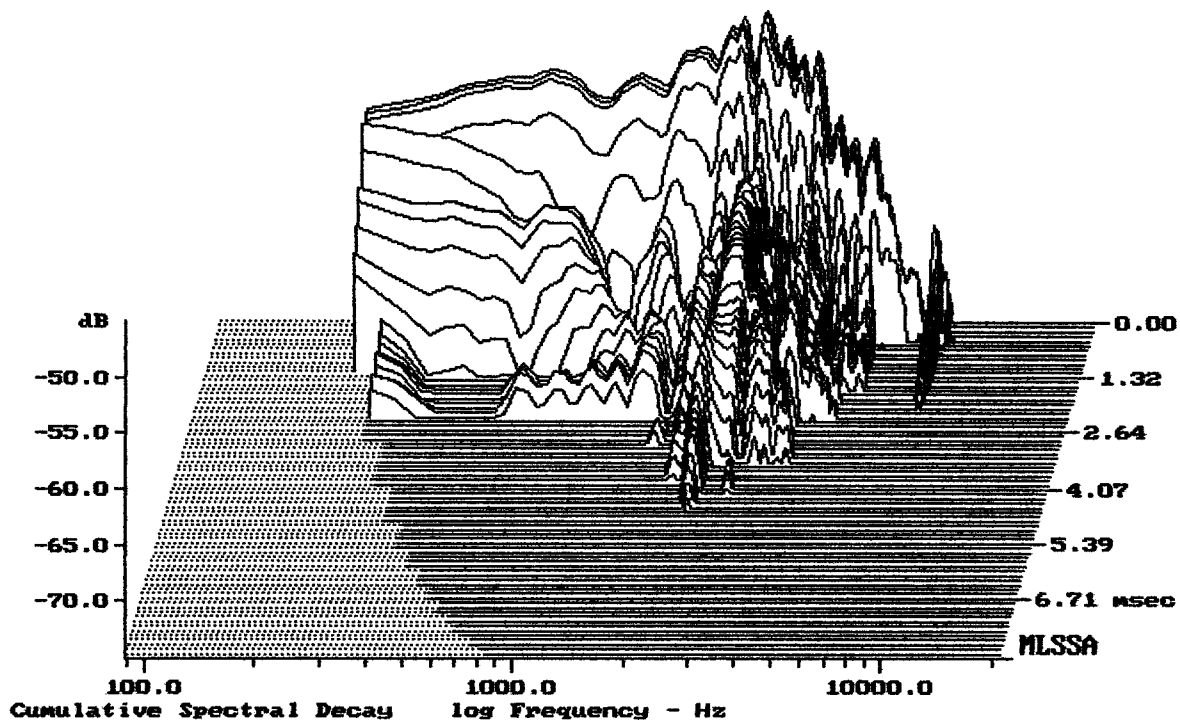

-74.17 dB, 2264 Hz (51), 4.510 msec (42)

DTTO

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.29	Ohms
2	Fs	67.05	Hz
3	Re	5.46	Ohms[dc]
4	Res	20.28	Ohms
5	Qms	7.67	
6	Qes	2.07	
7	Qts	1.63	
8	L1	0.65	mH
9	L2	0.86	mH
10	R2	3.58	Ohms
11	RMSE-load	0.24	Ohms
12	Vas(Sd)	62.42	liters
13	Mms	33.07	grams
14	Cms	170	$\mu$ M/Newton
15	B1	6.07	Tesla-M
16	SPLref(Sd)	91.4	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (40.00 grams)

Area (Sd): 510.71 sq cm


DCR mode: Measure (-0.12 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -29.0% (-20% to -50% is recommended).

12CV5

MLSSA: Parameters

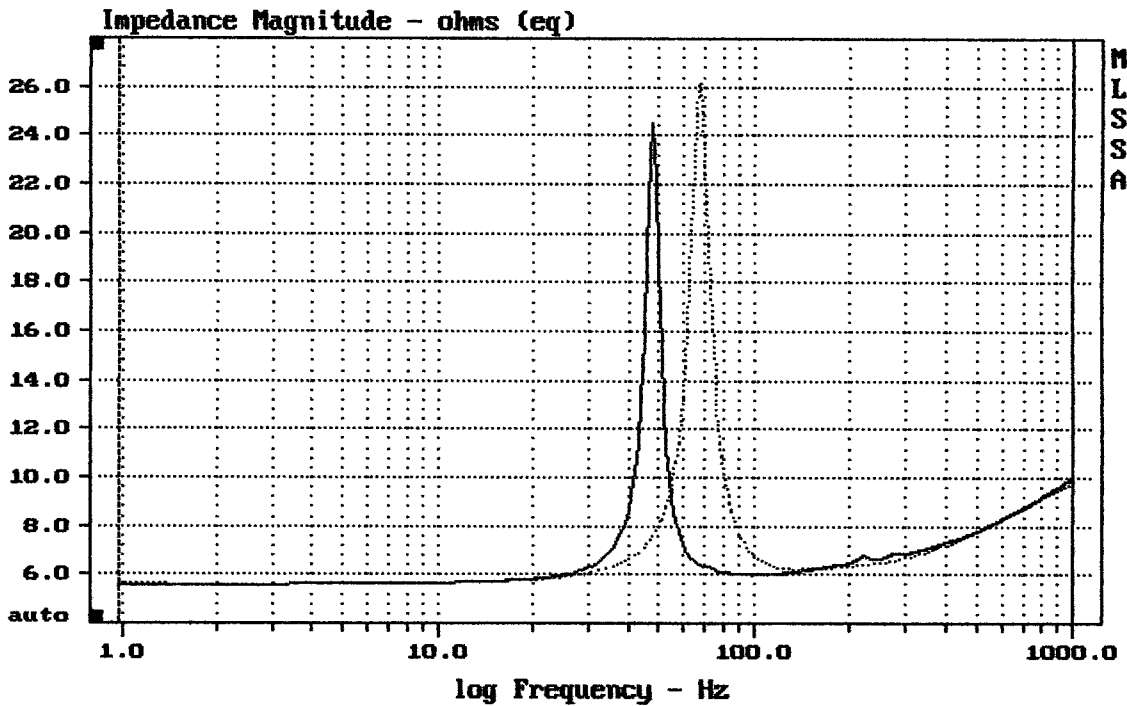

mean: 8.098, rms: 8.347, std: 2.022, max: 26.15, min: 5.546

MLSSA: Frequency Domain