


Level (100:2996 Hz) = 99.15 dB SPL/watt (8 ohms, @1.00 meters)

12MB3P

MLSSA: Frequency Domain

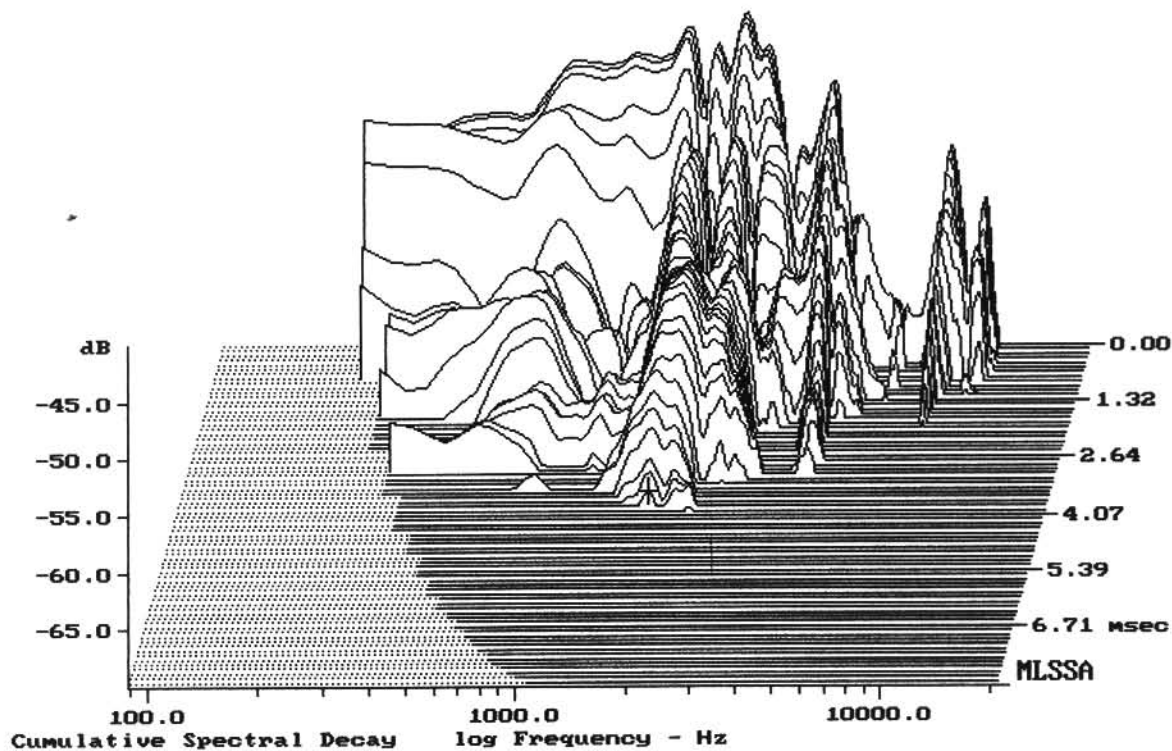

-68.54 dB, 1687 Hz (38), 3.850 msec (36)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.37	Ohms
2	Fs	63.32	Hz
3	Re	5.35	Ohms[dc]
4	Res	94.63	Ohms
5	Qms	10.41	
6	Qes	0.59	
7	Qts	0.56	
8	L1	0.32	mH
9	L2	0.95	mH
10	R2	2.41	Ohms
11	RMSE-load	0.34	Ohms
12	Vas(Sd)	52.14	liters
13	Mms	47.96	grams
14	Cms	132	$\mu\text{M}/\text{Newton}$
15	Bl	13.17	Tesla-M
16	SPLref(Sd)	95.3	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (80.00 grams)

Area (Sd): 530.93 sq cm


DCR mode: Measure (-0.08 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -37.7% (-20% to -50% is recommended).

12MB3P

MLSSA: Parameters

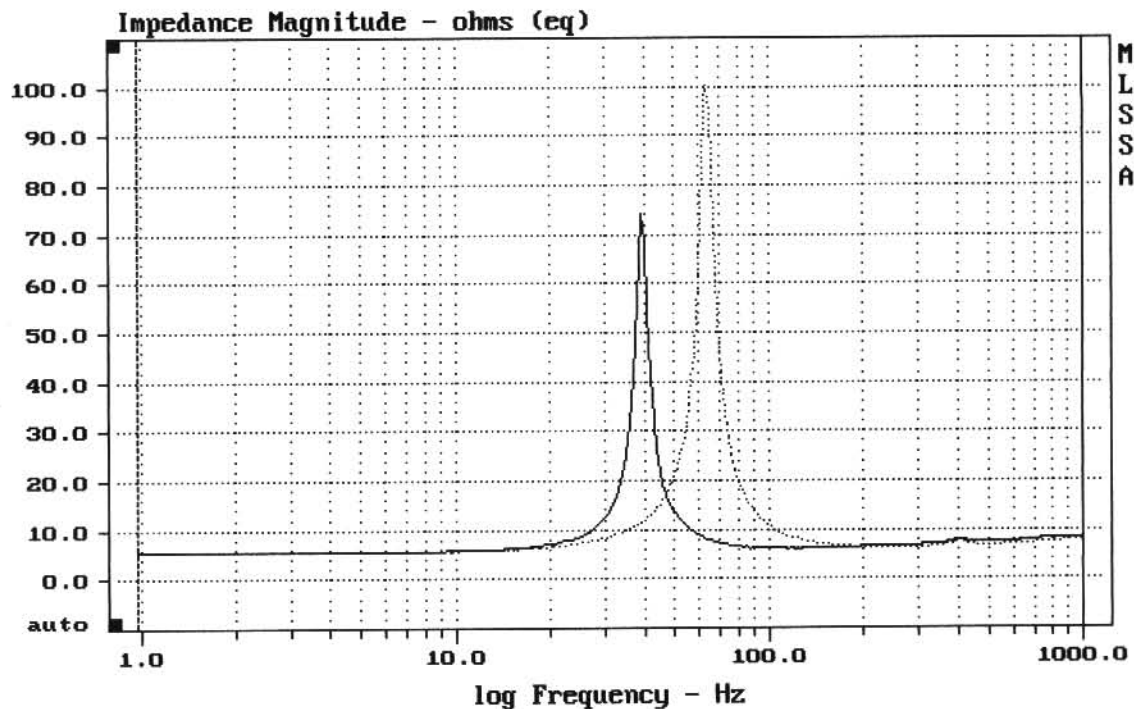

mean: 8.644, rms: 11.85, std: 8.1, max: 100.4, min: 5.417

DTTO

MLSSA: Frequency Domain