


Level (100:4506 Hz) = 94.86 dB SPL/watt (8 ohms, @1.00 meters)

12PW7

MLSSA: Frequency Domain

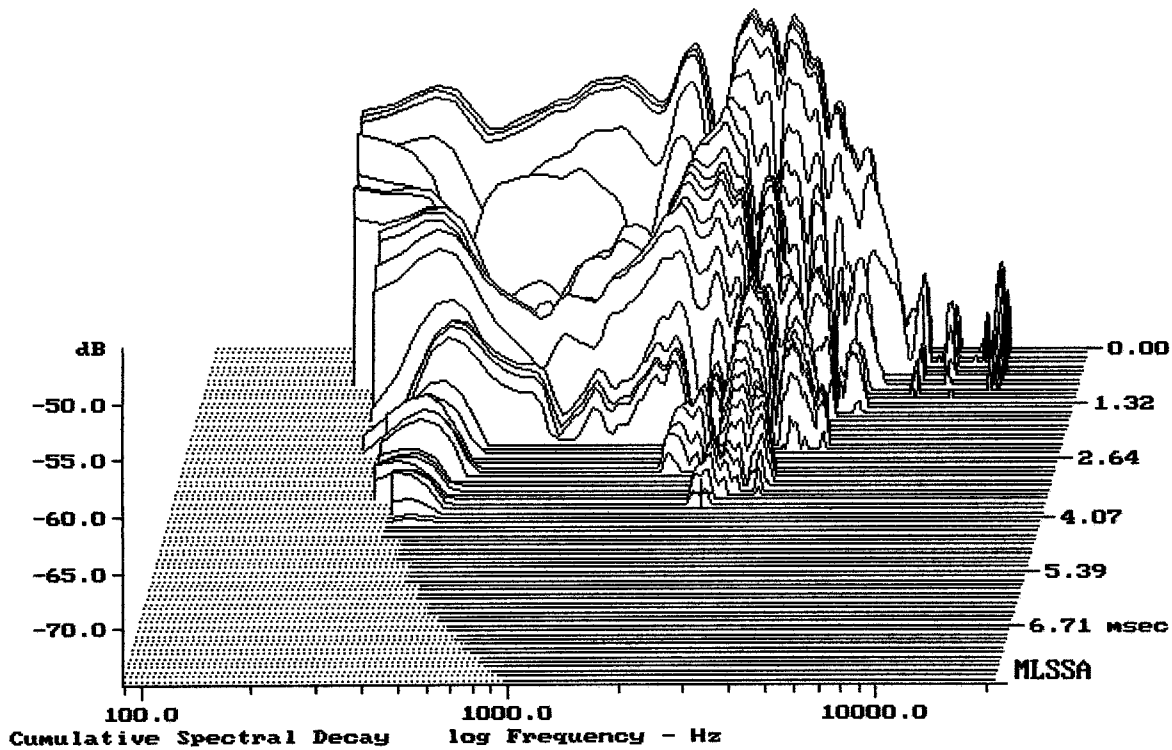

-74.09 dB, 2441 Hz (55), 3.740 msec (35)

DT10

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.42	Ohms
2	Fs	45.33	Hz
3	Re	5.20	Ohms[dc]
4	Res	108.49	Ohms
5	Qms	10.98	
6	Qes	0.53	
7	Qts	0.50	
8	L1	0.81	mH
9	L2	0.88	mH
10	R2	3.49	Ohms
11	RMSE-load	0.32	Ohms
12	Vas(Sd)	118.86	liters
13	Mms	38.00	grams
14	Cms	324	$\mu\text{M}/\text{Newton}$
15	B1	10.34	Tesla-M
16	SPLref(Sd)	95.1	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (60.00 grams)

Area (Sd): 510.71 sq cm


DCR mode: Measure (-0.68 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -32.8% (-20% to -50% is recommended).

12PW7

MLSSA: Parameters

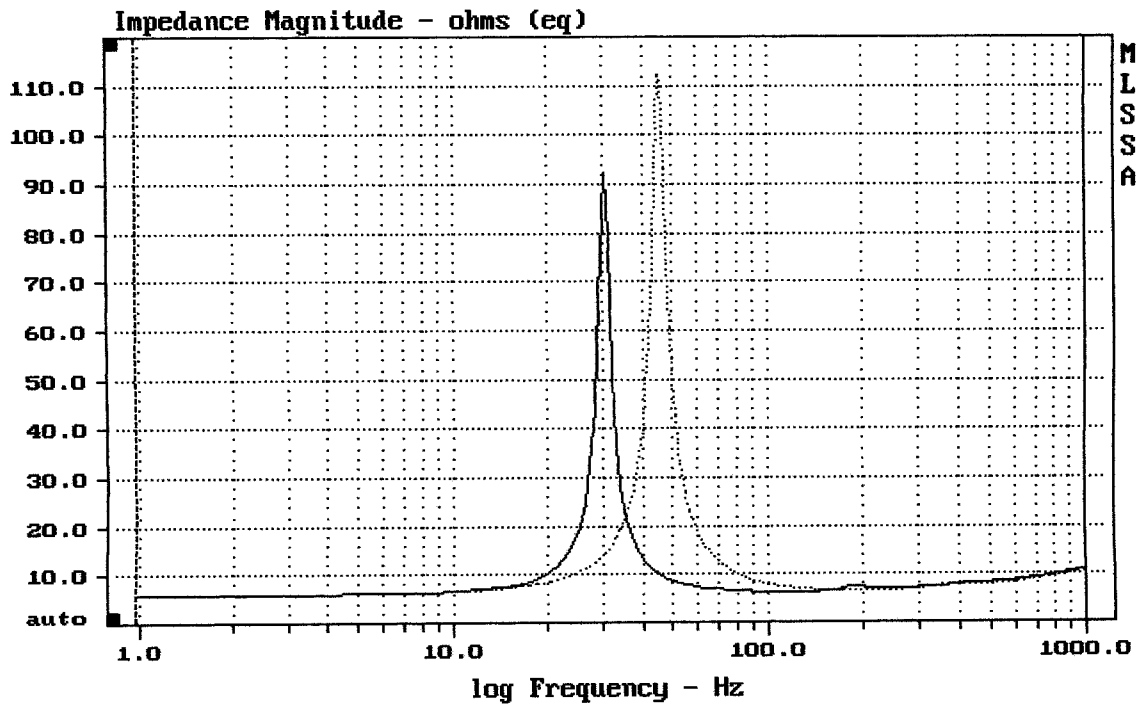

mean: 9.51, rms: 12.25, std: 7.728, max: 112.2, min: 5.868

MLSSA: Frequency Domain