


Level (100:3995 Hz) = 97.92 dB SPL/watt (8 ohms, @1.50 meters)

15CU4

MLSSA: Frequency Domain

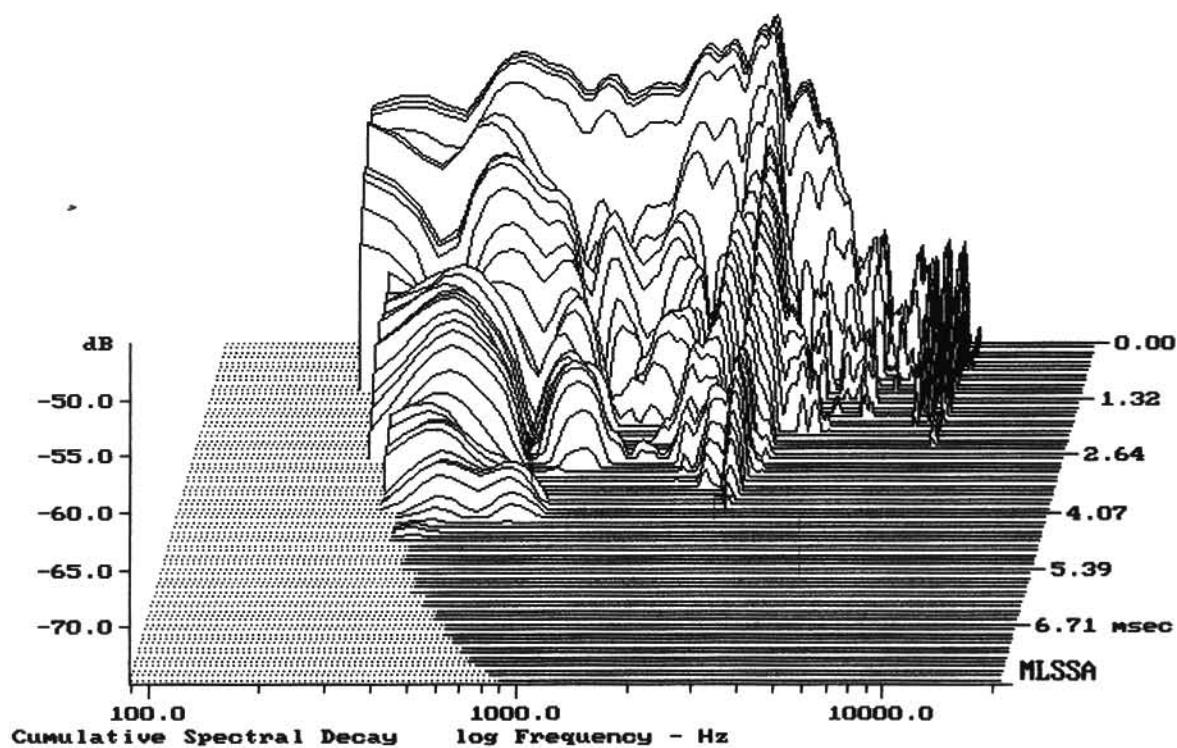

-74.24 dB, 2708 Hz (61), 3.850 msec (36)

## Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.25	Ohms
2	Fs	68.53	Hz
3	Re	5.50	Ohms[dc]
4	Res	30.18	Ohms
5	Qms	9.30	
6	Qes	1.69	
7	Qts	1.43	
8	L1	0.52	mH
9	L2	0.78	mH
10	R2	3.94	Ohms
11	RMSE-load	0.33	Ohms
12	Vas(Sd)	119.53	liters
13	Mms	46.36	grams
14	Cms	116	$\mu\text{M}/\text{Newton}$
15	B1	8.05	Tesla-M
16	SPLref(Sd)	95.4	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (80.00 grams)

Area (Sd): 855.30 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -34.6% (-20% to -50% is recommended).

15CV4

MLSSA: Parameters

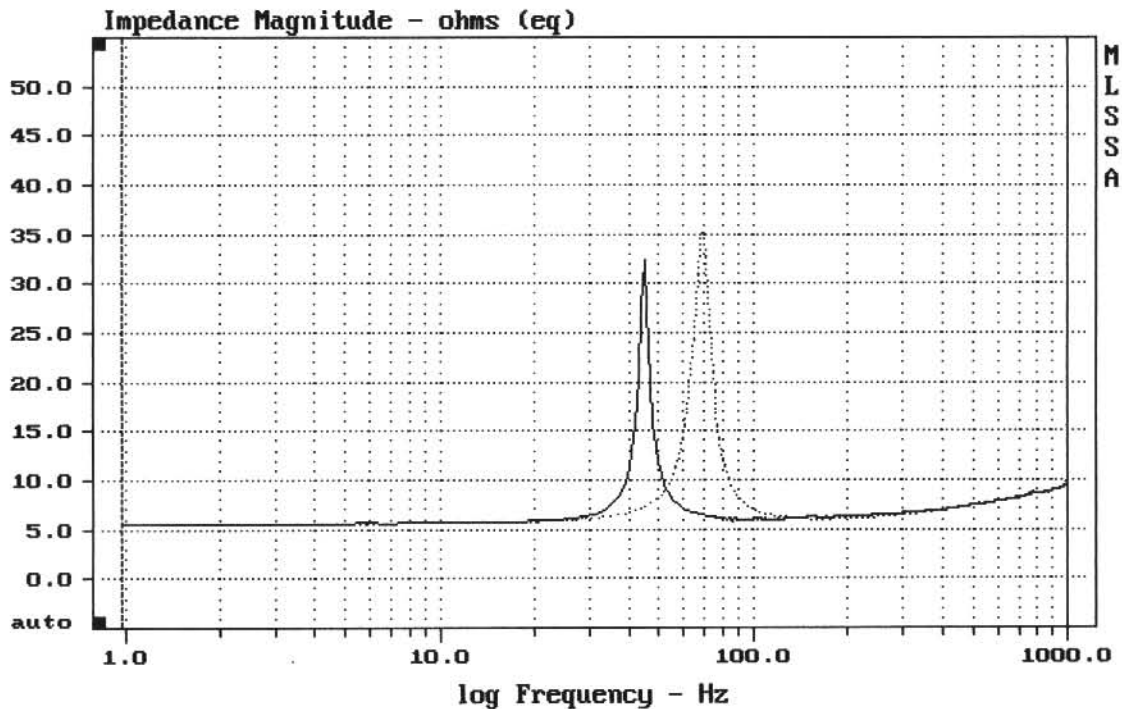


---

mean: 7.898, rms: 8.347, std: 2.702, max: 35.17, min: 5.559

---

DTTO

MLSSA: Frequency Domain