


Level (100:4206 Hz) = 95.61 dB SPL/watt (8 ohms, @1.50 meters)

15CV5

MLSSA: Frequency Domain

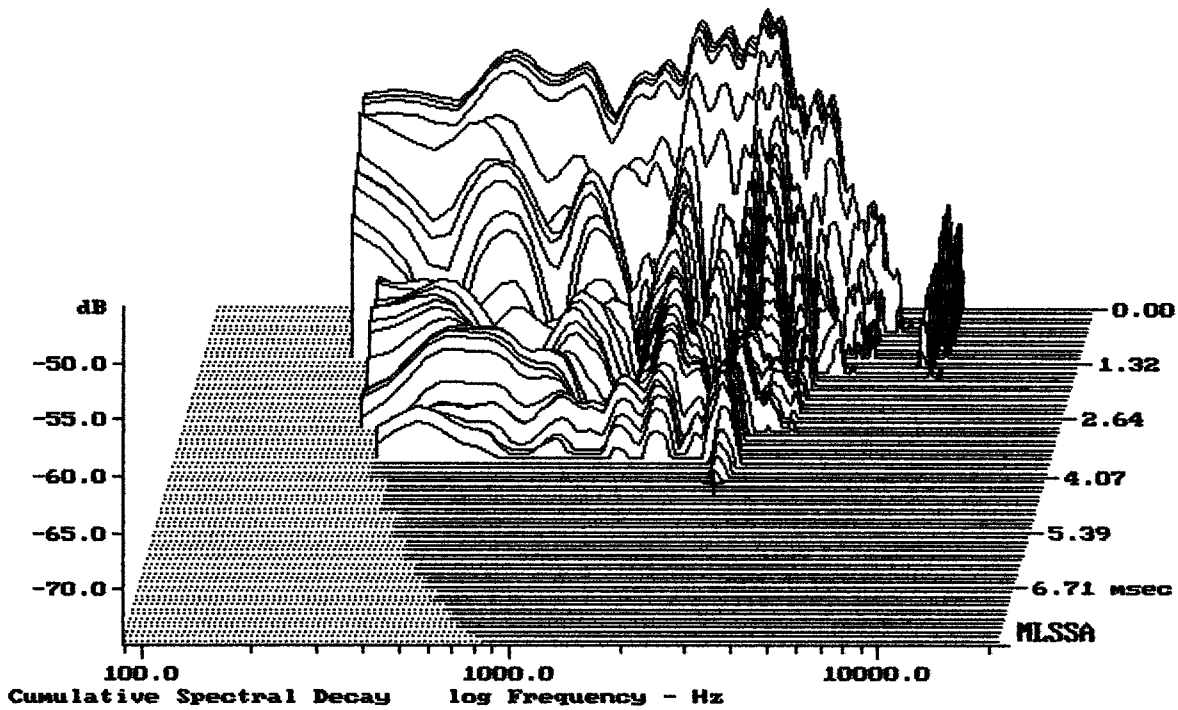

-74.73 dB, 2708 Hz (61), 4.290 msec (40)

DTTO

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.24	Ohms
2	Fs	96.47	Hz
3	Re	5.46	Ohms[dc]
4	Res	10.61	Ohms
5	Qms	9.62	
6	Qes	4.95	
7	Qts	3.27	
8	L1	0.62	mH
9	L2	0.94	mH
10	R2	3.85	Ohms
11	RMSE-load	0.28	Ohms
12	Vas(Sd)	42.96	liters
13	Mms	61.24	grams
14	Cms	44	$\mu\text{M}/\text{Newton}$
15	B1	6.40	Tesla-M
16	SPLref(Sd)	90.7	dB[Re]
17	Rub-index	0.13	

Method: Mass-loaded (60.00 grams)

Area (Sd): 829.58 sq cm


DCR mode: Measure (-0.12 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -29.3% (-20% to -50% is recommended).

15CV5

MLSSA: Parameters

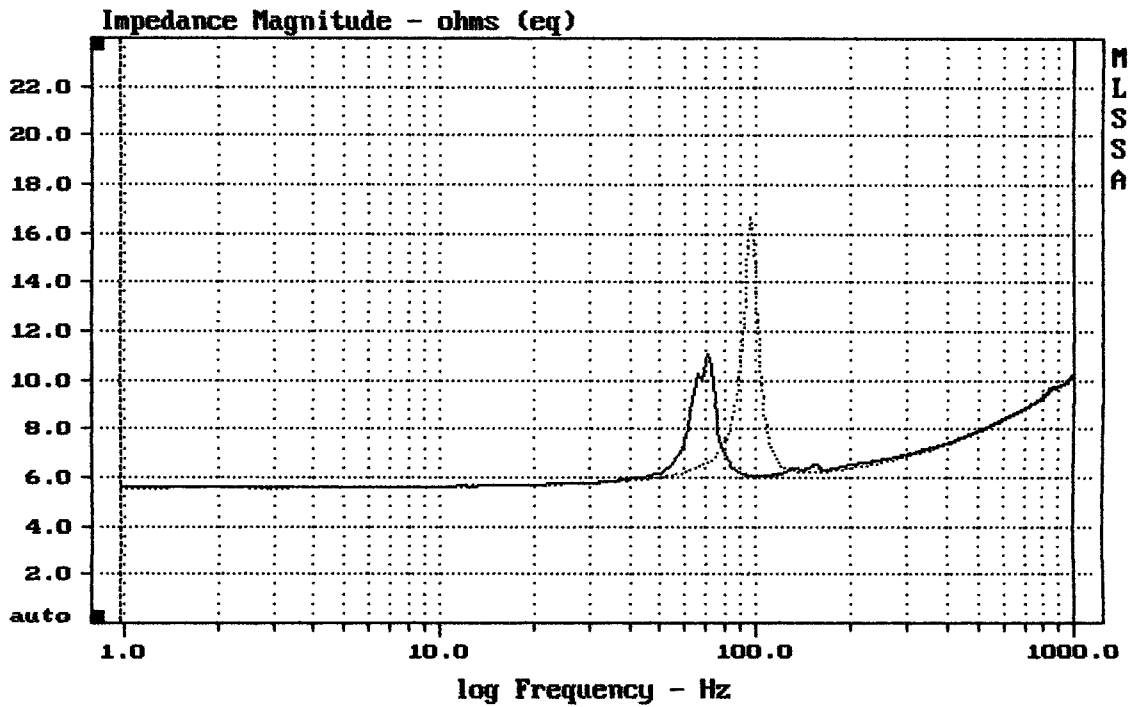

mean: 8.863, rms: 8.198, std: 1.48, max: 16.7, min: 5.567

MLSSA: Frequency Domain