


Level (100:3107 Hz) = 96.41 dB SPL/watt (8 ohms, @1.50 meters)

15PW6

MLSSA: Frequency Domain

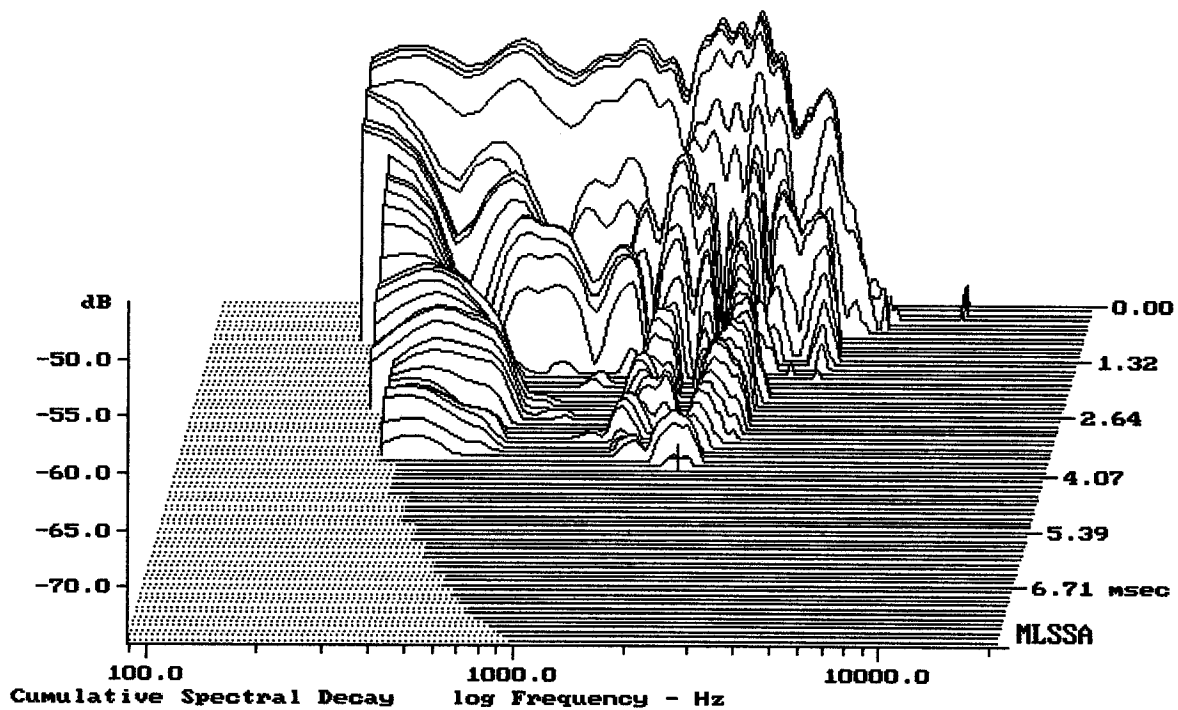

-74.28 dB, 2042 Hz (46), 3.850 msec (36)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	1.01	Ohms
2	Fs	41.17	Hz
3	Re	6.41	Ohms[dc]
4	Res	235.78	Ohms
5	Qms	18.88	
6	Qes	0.51	
7	Qts	0.50	
8	L1	0.81	mH
9	L2	1.36	mH
10	R2	10.36	Ohms
11	RMSE-load	1.03	Ohms
12	Vas(Sd)	181.40	liters
13	Mms	84.63	grams
14	Cms	177	$\mu$ M/Newton
15	B1	16.54	Tesla-M
16	SPLref(Sd)	95.8	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (80.00 grams)

Area (Sd): 855.30 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -28.2% (-20% to -50% is recommended).

15PW6

MLSSA: Parameters

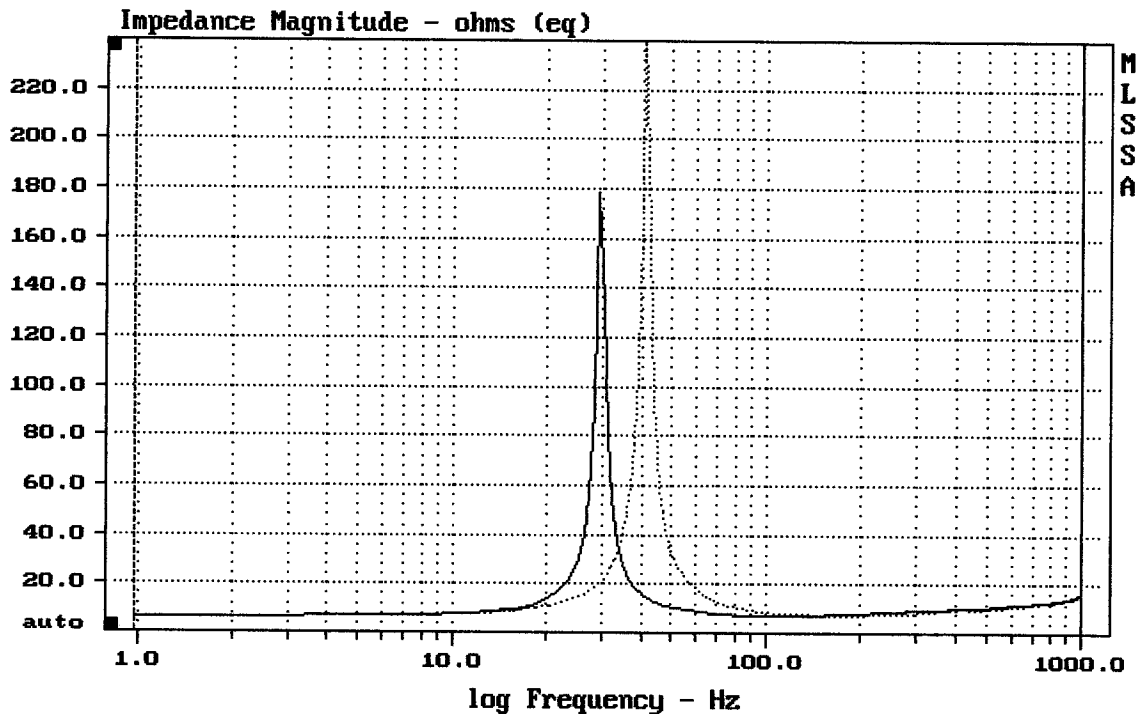

mean: 12.03, rms: 17.54, std: 12.76, max: 244.1, min: 6.445

DTTO

MLSSA: Frequency Domain