


Level (100:4006 Hz) = 95.62 dB SPL/watt (8 ohms, @1.50 meters)

15PW7

MLSSA: Frequency Domain

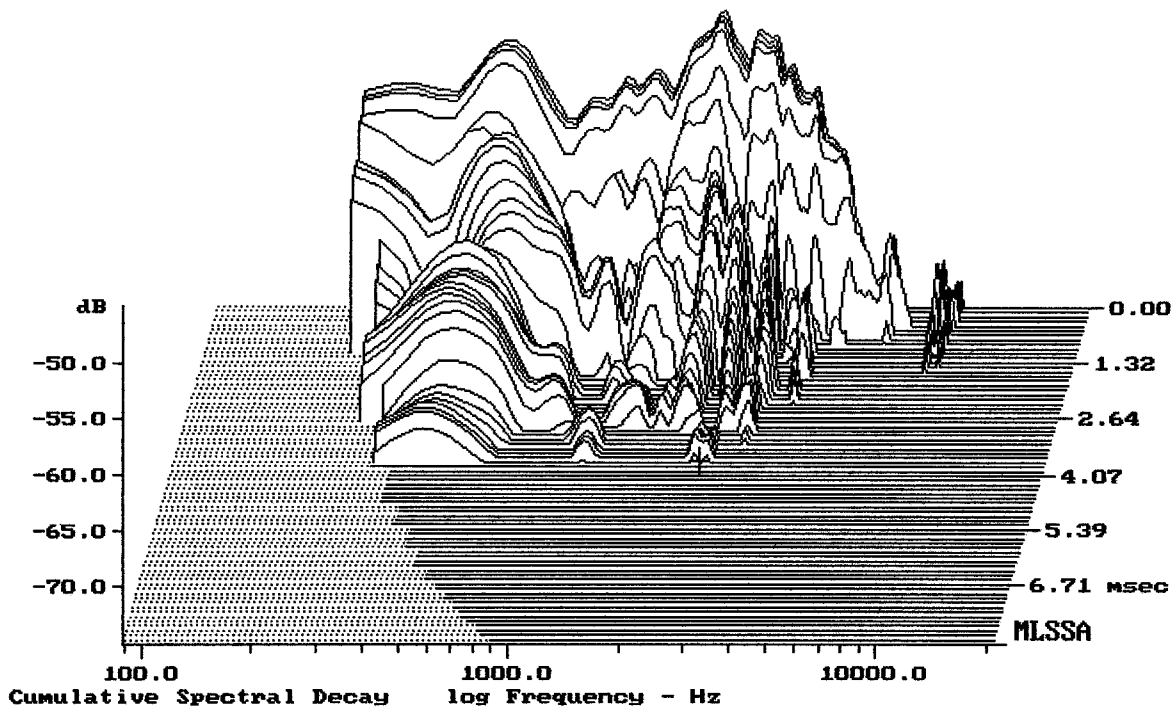

-74.85 dB, 2397 Hz (54), 3.740 msec (35)

DTTO

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.41	Ohms
2	Fs	51.81	Hz
3	Re	5.51	Ohms[dc]
4	Res	50.17	Ohms
5	Qms	9.78	
6	Qes	1.07	
7	Qts	0.97	
8	L1	0.93	mH
9	L2	1.18	mH
10	R2	4.67	Ohms
11	RMSE-load	0.23	Ohms
12	Vas(Sd)	170.69	liters
13	Mms	56.80	grams
14	Cms	166	$\mu\text{M}/\text{Newton}$
15	B1	9.74	Tesla-M
16	SPLref(Sd)	95.3	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (80.00 grams)

Area (Sd): 855.30 sq cm


DCR mode: Measure (-0.68 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -28.4% (-20% to -50% is recommended).

15PW7

MLSSA: Parameters

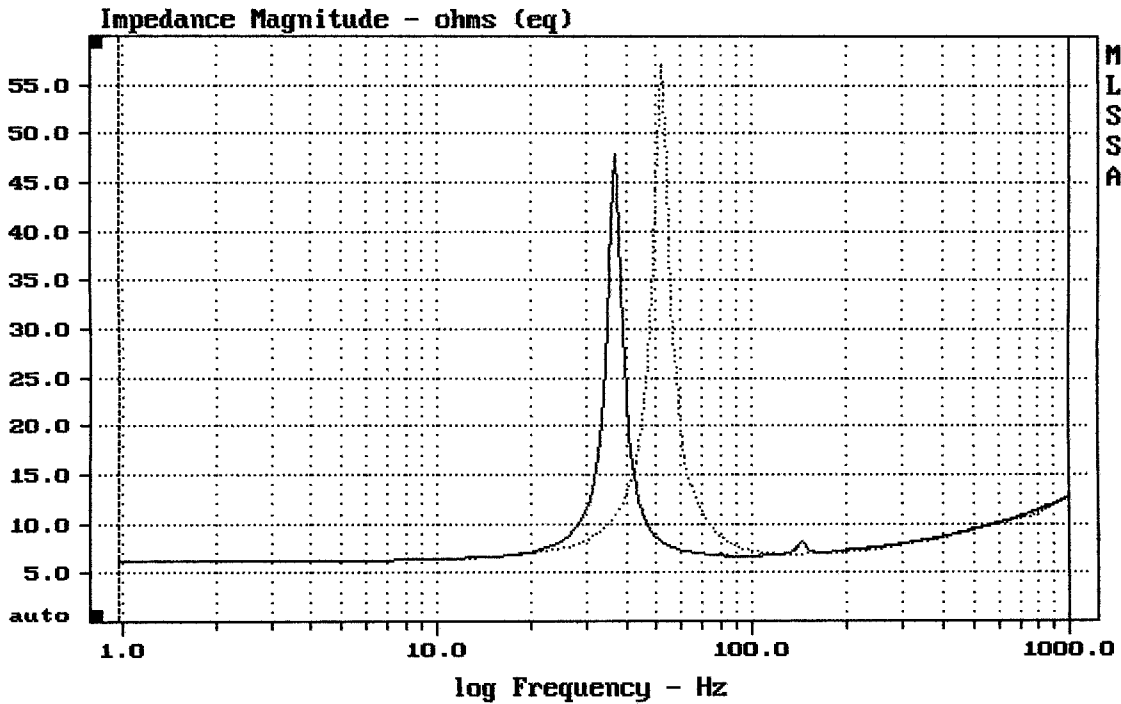

mean: 9.944, rms: 10.7, std: 3.964, max: 57.09, min: 6.158

MLSSA: Frequency Domain