


Level (55:3007 Hz) = 95.02 dB SPL/watt (4 ohms, @1.50 meters)

15W1A

MLSSA: Frequency Domain

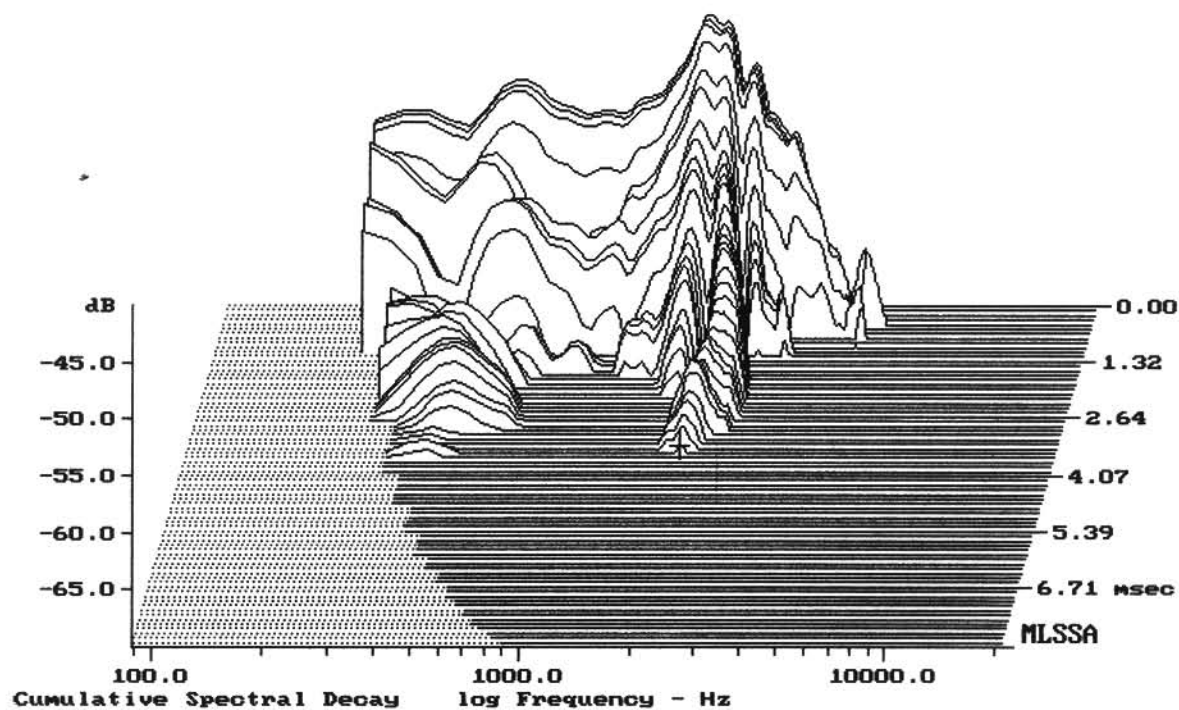

-69.35 dB, 1953 Hz (44), 3.520 msec (33)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.24	Ohms
2	Fs	39.89	Hz
3	Re	3.19	Ohms[dc]
4	Res	49.51	Ohms
5	Qms	12.79	
6	Qes	0.83	
7	Qts	0.78	
8	L1	0.46	mH
9	L2	0.74	mH
10	R2	3.45	Ohms
11	RMSE-load	0.35	Ohms
12	Vas(Sd)	171.82	liters
13	Mms	89.53	grams
14	Cms	178	$\mu\text{M}/\text{Newton}$
15	B1	9.32	Tesla-M
16	SPLref(Sd)	93.0	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (80.00 grams)

Area (Sd): 829.58 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -26.4% (-20% to -50% is recommended).

15W1A

MLSSA: Parameters

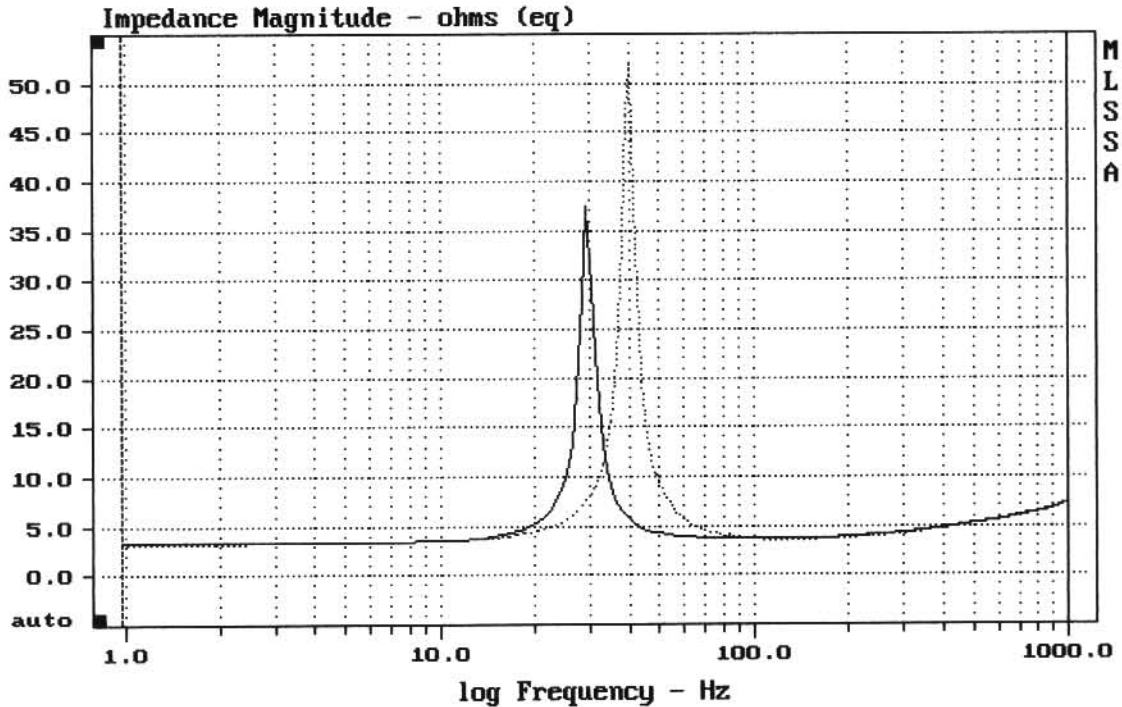

mean: 5.617, rms: 6.423, std: 3.115, max: 51.81, min: 3.252

DTTO

MLSSA: Frequency Domain