



Level (100:3507 Hz) = 95.66 dB SPL/watt (4 ohms, @1.50 meters)

15W2A ONIX

MLSSA: Frequency Domain

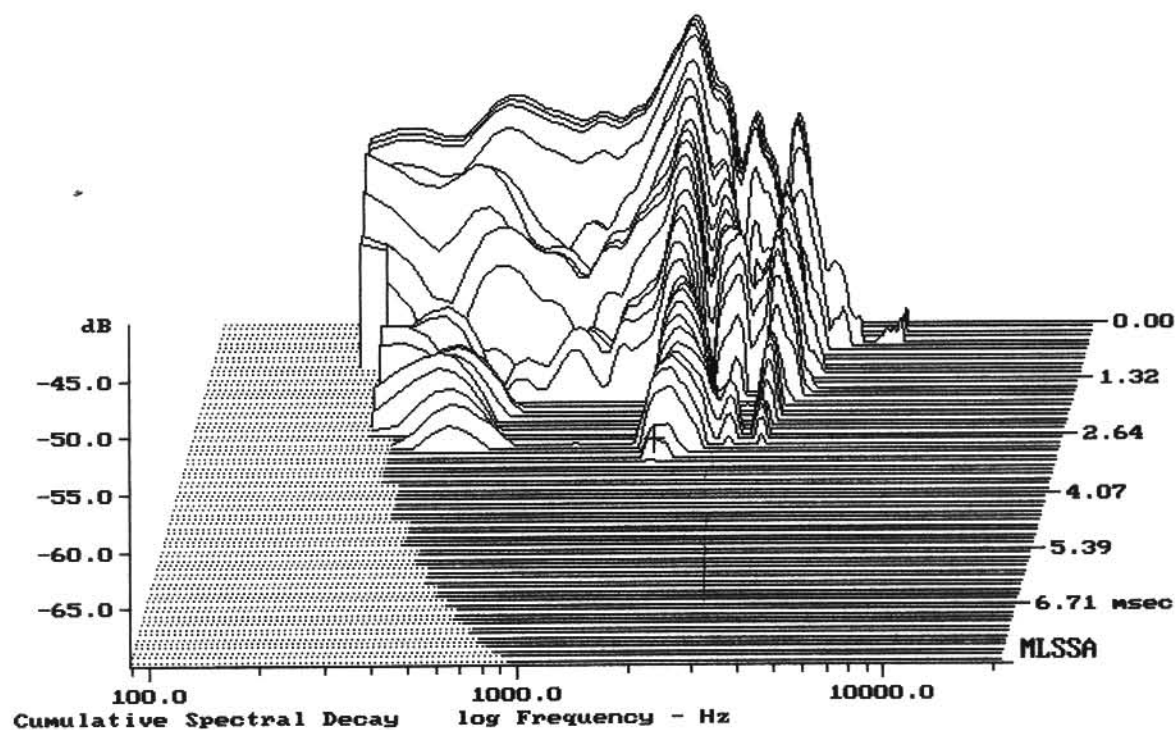


-68.33 dB, 1642 Hz (37), 3.190 msec (30)

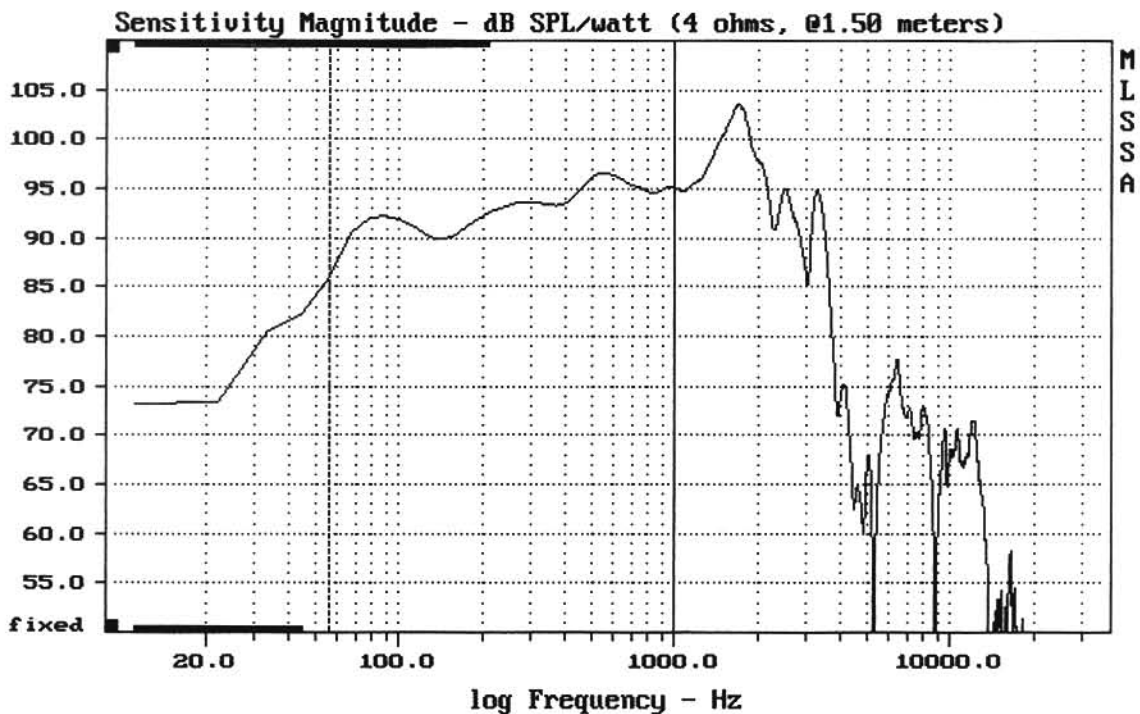

Level (55:999 Hz) = 93.27 dB SPL/watt (4 ohms, @1.50 meters)

15W2A ONIX

MLSSA: Frequency Domain

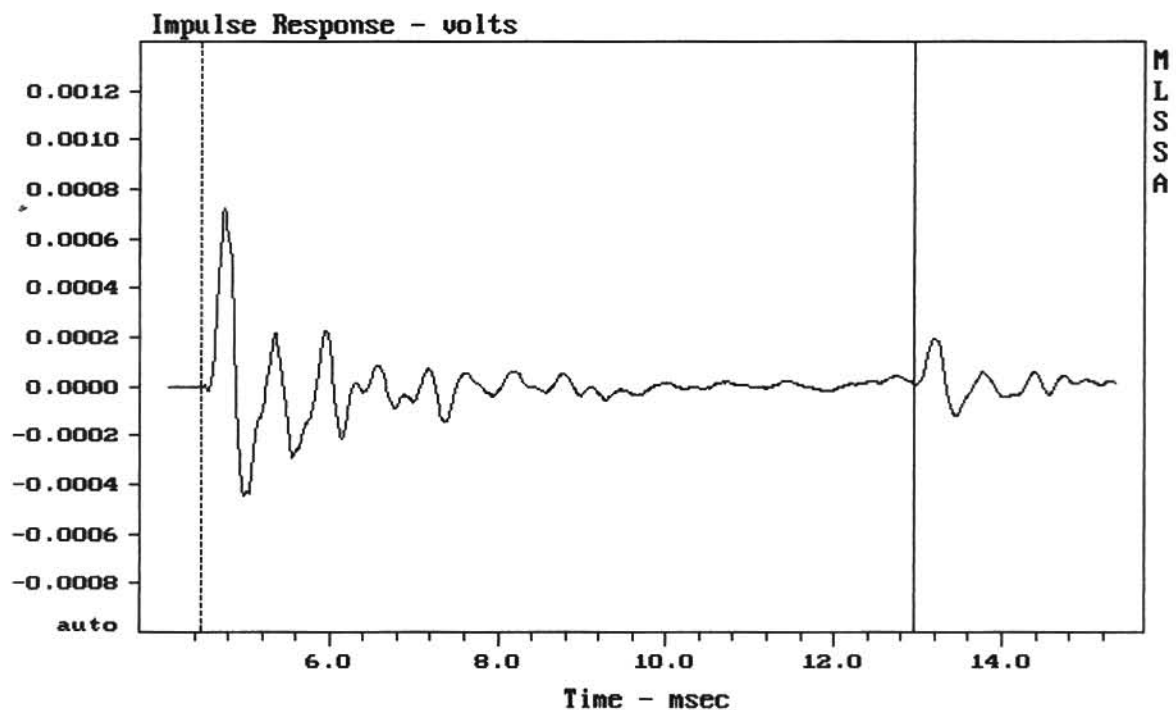

mean: $-1.727e-006$, rms: 0.0001271, std: 0.0001271, max: 0.0007209, min: -0.000

15W2A ONIX

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.25	Ohms
2	Fs	37.28	Hz
3	Re	3.33	Ohms[dc]
4	Res	59.93	Ohms
5	Qms	13.34	
6	Qes	0.74	
7	Qts	0.70	
8	L1	0.51	mH
9	L2	0.84	mH
10	R2	4.22	Ohms
11	RMSE-load	0.33	Ohms
12	Vas(Sd)	206.33	liters
13	Mms	85.39	grams
14	Cms	213	$\mu\text{M}/\text{Newton}$
15	B1	9.48	Tesla-M
16	SPLref(Sd)	93.4	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (80.00 grams)

Area (Sd): 829.58 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -25.9% (-20% to -50% is recommended).

15W2A ONIX

MLSSA: Parameters

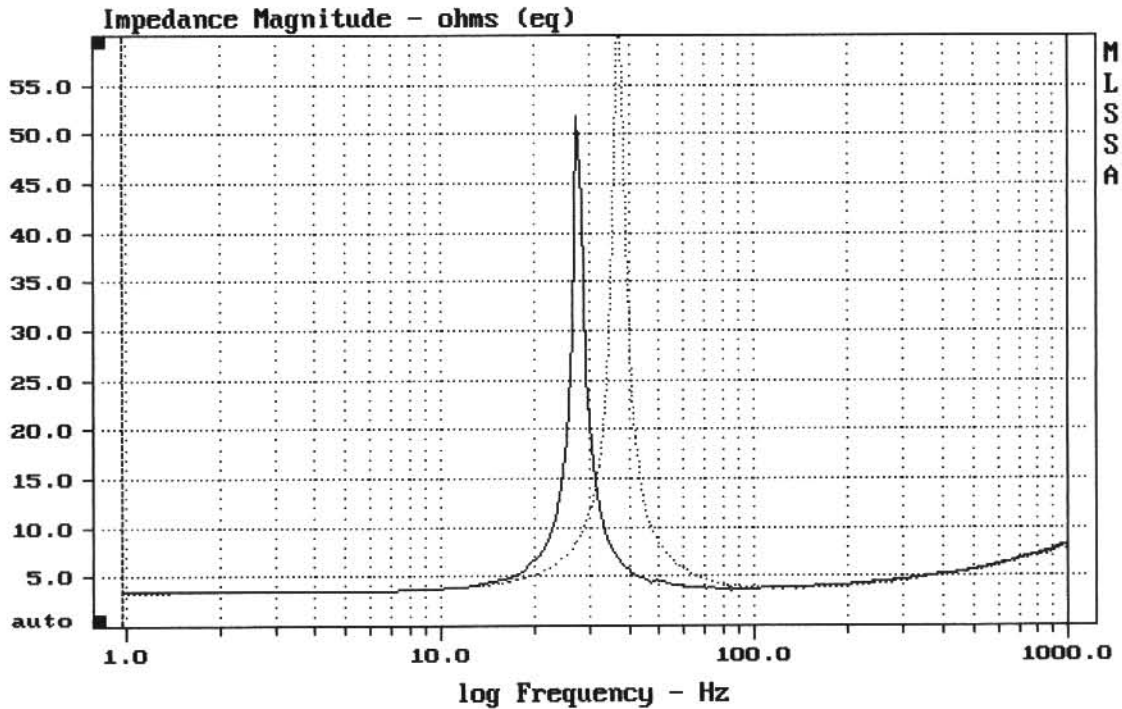

mean: 6.122, rms: 7.107, std: 3.609, max: 63.32, min: 3.372

DTTO

MLSSA: Frequency Domain