


Level (55:1409 Hz) = 92.20 dB SPL/watt (8 ohms, @1.50 meters)

18SWS800

MLSSA: Frequency Domain

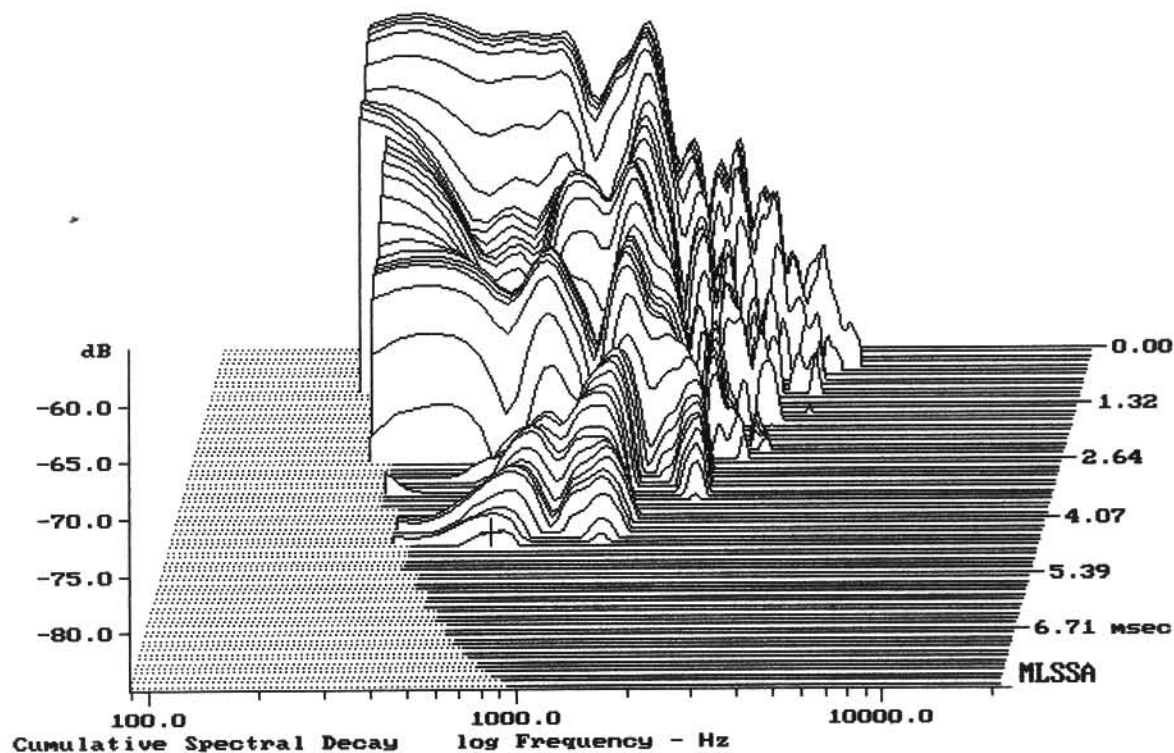

-83.67 dB, 666 Hz (15), 4.730 msec (44)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	1.00	Ohms
2	Fs	33.16	Hz
3	Re	5.53	Ohms[dc]
4	Res	175.25	Ohms
5	Qms	15.49	
6	Qes	0.49	
7	Qts	0.47	
8	L1	3.09	mH
9	L2	3.09	mH
10	R2	12.23	Ohms
11	RMSE-load	1.12	Ohms
12	Vas(Sd)	240.97	liters
13	Mms	201.68	grams
14	Cms	114	$\mu\text{M}/\text{Newton}$
15	Bl	21.80	Tesla-M
16	SPLref(Sd)	94.4	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (140.00 grams)

Area (Sd): 1225.42 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -23.3% (-20% to -50% is recommended).

18SWS800

MLSSA: Parameters

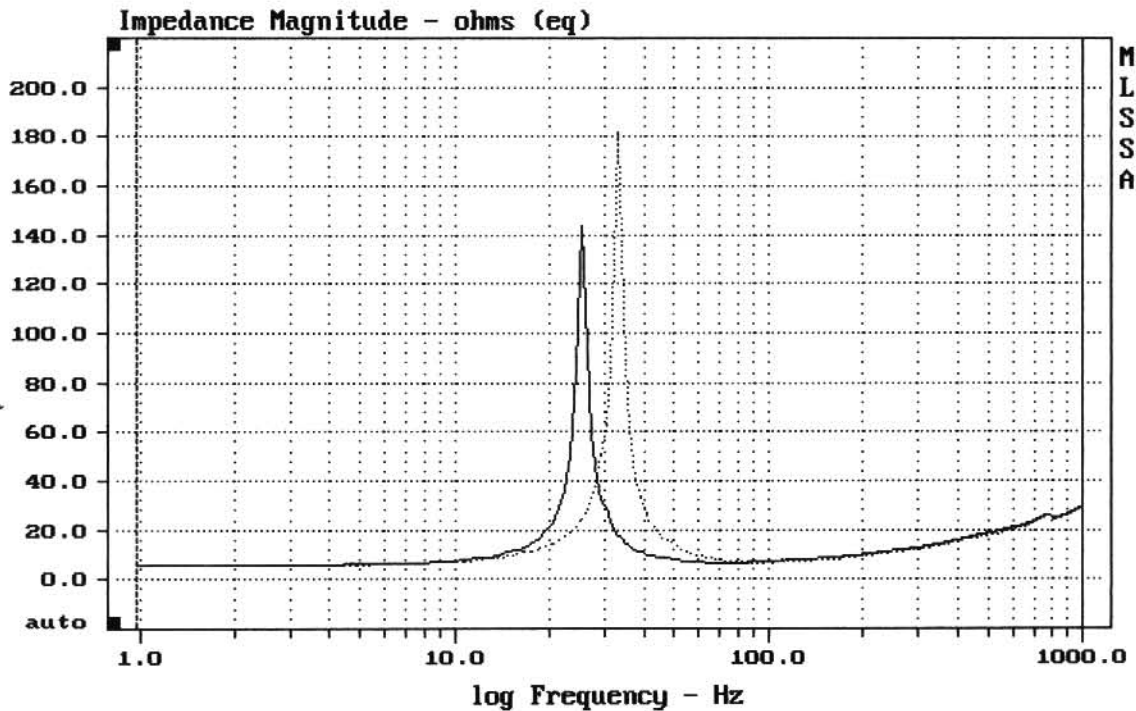

mean: 18.65, rms: 21.49, std: 10.66, max: 181.7, min: 5.608

DTTO

MLSSA: Frequency Domain