


Level (100:21007 Hz) = 86.28 dB SPL/watt (4 ohms, @1.00 meters)

2x 4TR4A

MLSSA: Frequency Domain

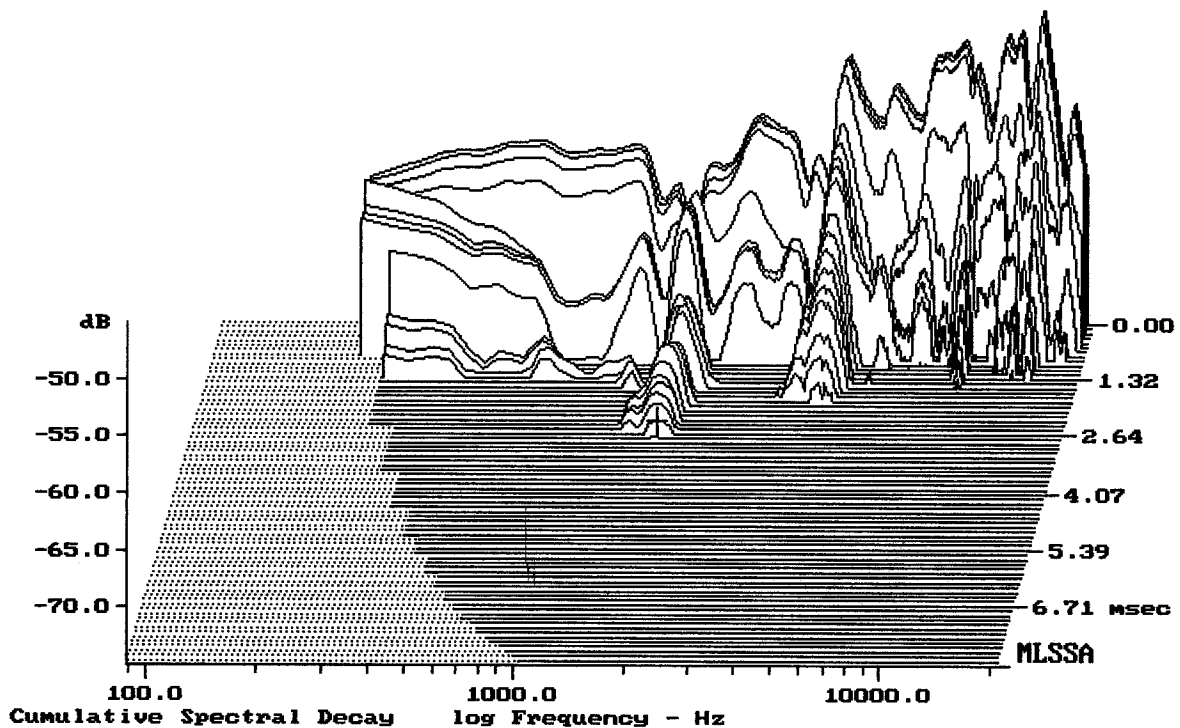

-73.82 dB, 1642 Hz (37), 2.640 msec (25)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.15	Ohms
2	Fs	106.19	Hz
3	Re	3.38	Ohms[dc]
4	Res	10.21	Ohms
5	Qms	3.02	
6	Qes	1.00	
7	Qts	0.75	
8	L1	0.07	mH
9	L2	0.20	mH
10	R2	1.07	Ohms
11	RMSE-load	0.05	Ohms
12	Vas(Sd)	1.97	liters
13	Mms	5.15	grams
14	Cms	436	$\mu\text{M}/\text{Newton}$
15	Bl	3.41	Tesla-M
16	SPLref(Sd)	85.6	dB[Re]
17	Rub-index	0.03	

Method: Mass-loaded (10.00 grams)

Area (Sd): 56.75 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -39.7% (-20% to -50% is recommended).

SELENIUM 4TR4A

MLSSA: Parameters

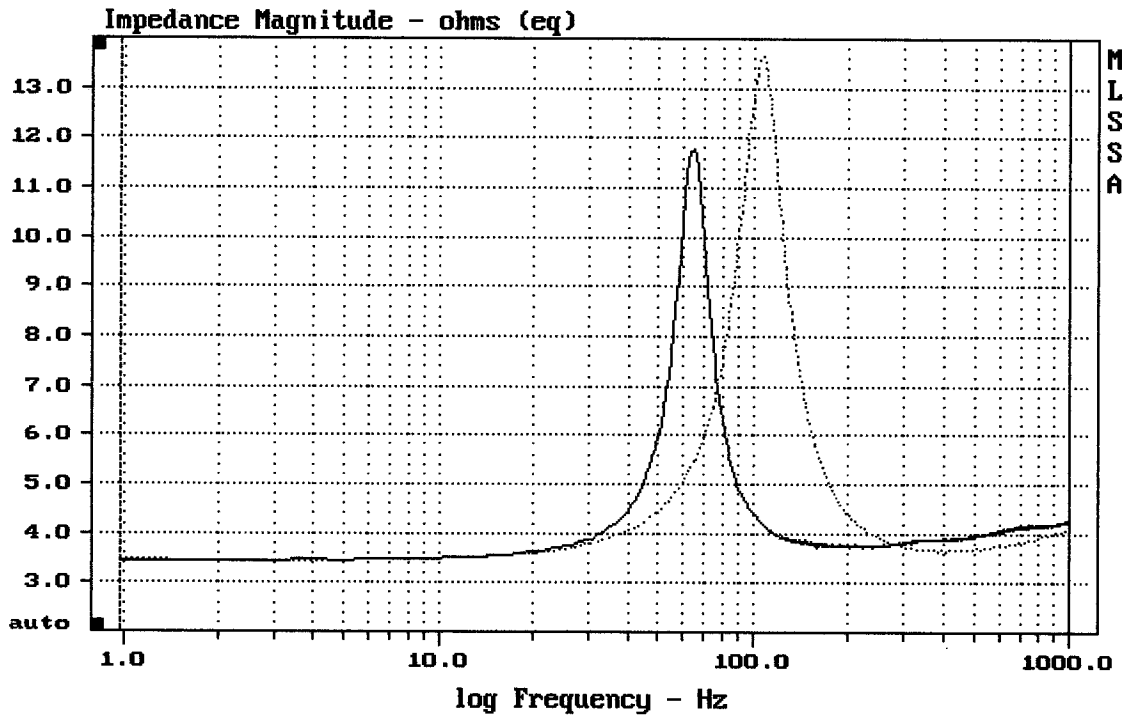

mean: 4.388, rms: 4.721, std: 1.742, max: 13.65, min: 3.449

MLSSA: Frequency Domain