


Level (100:6603 Hz) = 84.16 dB SPL/watt (4 ohms, 01.00 meters)

2x SELENIUM 52V2A

MLSSA: Frequency Domain

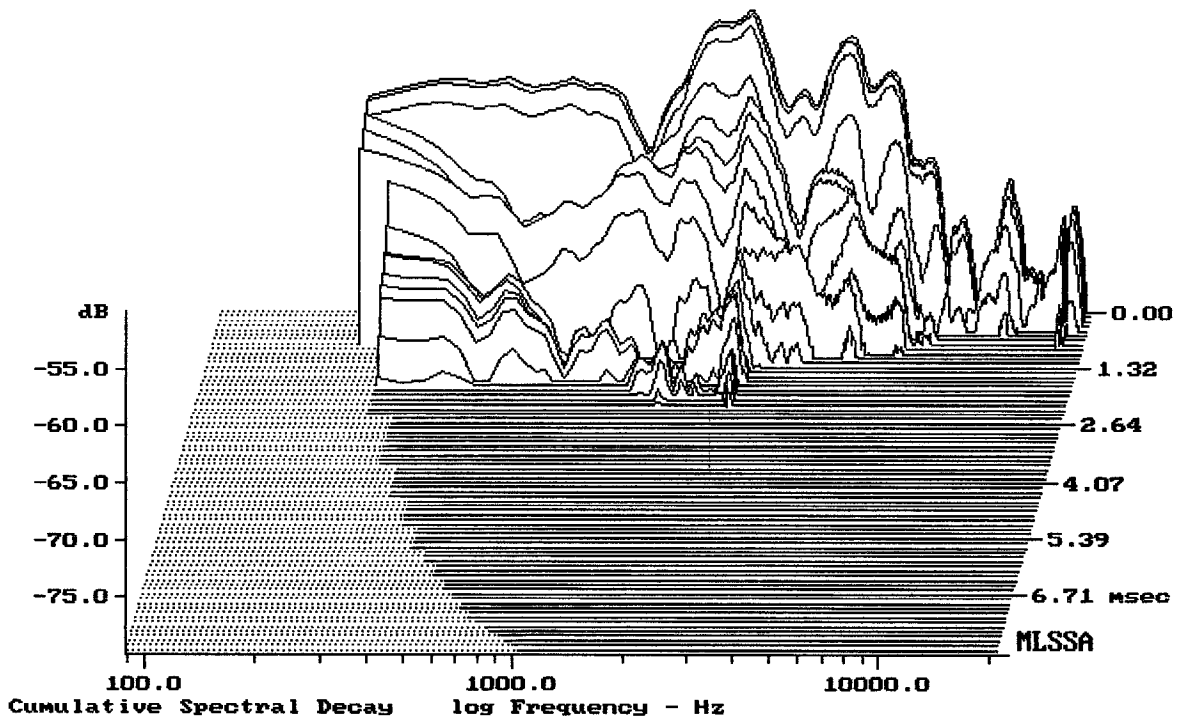

-78.94 dB, 2486 Hz (56), 2.200 msec (21)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.05	Ohms
2	Fs	98.79	Hz
3	Re	3.47	Ohms[dc]
4	Res	7.88	Ohms
5	Qms	3.06	
6	Qes	1.35	
7	Qts	0.94	
8	L1	0.14	mH
9	L2	0.20	mH
10	R2	1.42	Ohms
11	RMSE-load	0.13	Ohms
12	Vas(Sd)	3.35	liters
13	Mms	6.72	grams
14	Cms	386	$\mu\text{M}/\text{Newton}$
15	Bl	3.27	Tesla-M
16	SPLref(Sd)	85.6	dB[Re]
17	Rub-index	0.04	

Method: Mass-loaded (10.00 grams)

Area (Sd): 78.54 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -33.3% (-20% to -50% is recommended).


SELENIUM 52V2A

MLSSA: Parameters

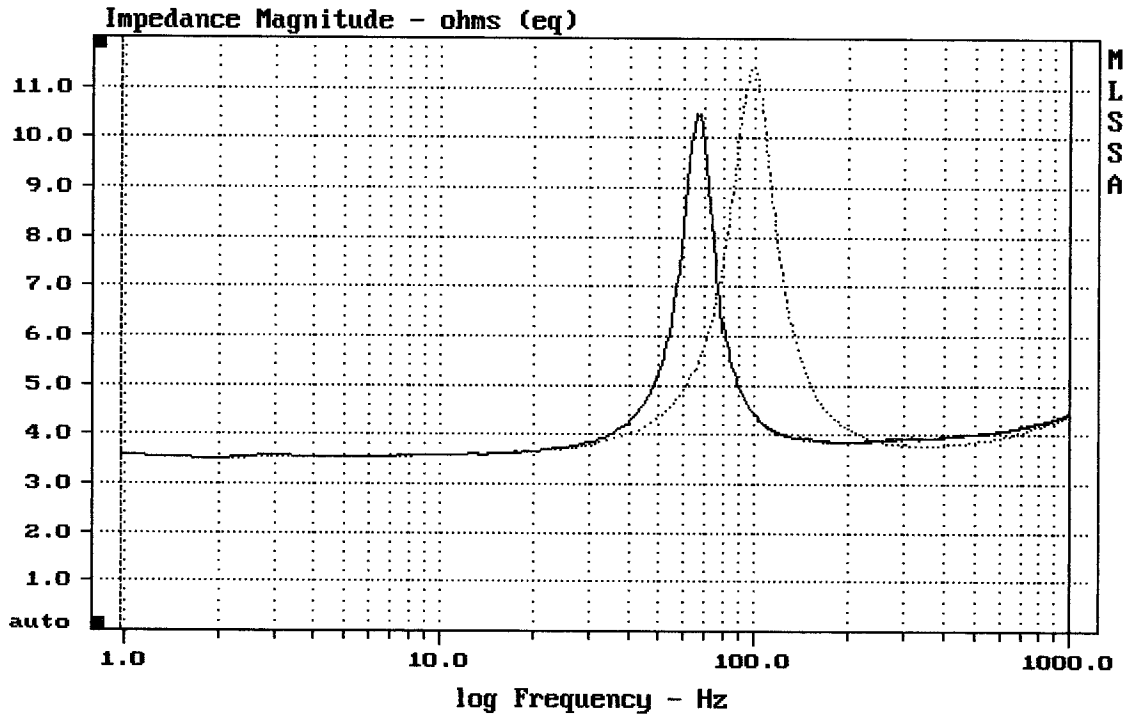

mean: 4.361, rms: 4.536, std: 1.249, max: 11.43, min: 3.499


MLSSA: Frequency Domain

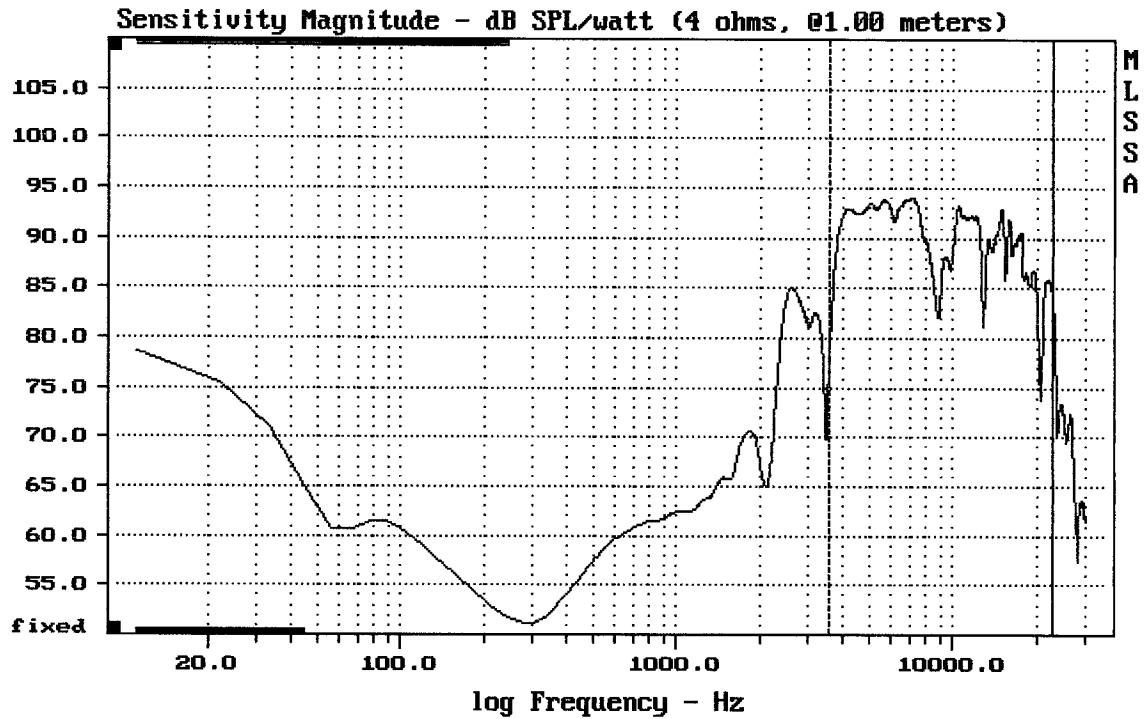


Level (3596:23005 Hz) = 90.99 dB SPL/watt (4 ohms, @1.00 meters)

SELENIUM 52V2A

MLSSA: Frequency Domain

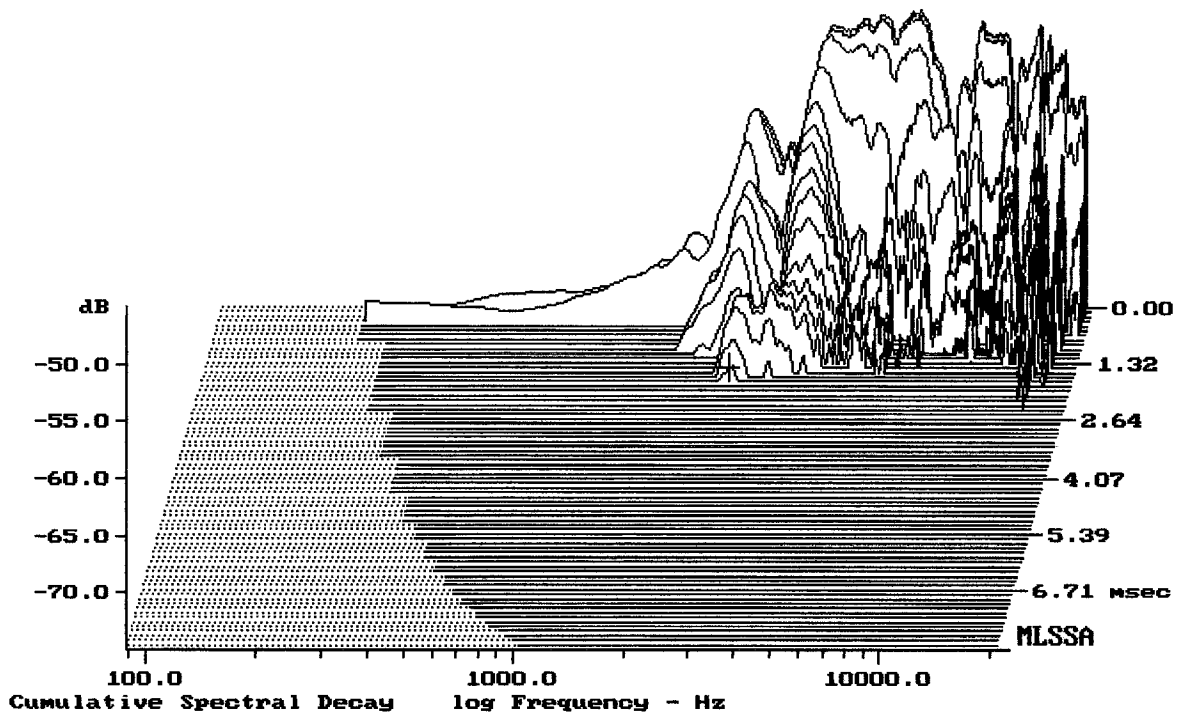


-73.66 dB, 2441 Hz (55), 1.760 msec (17)

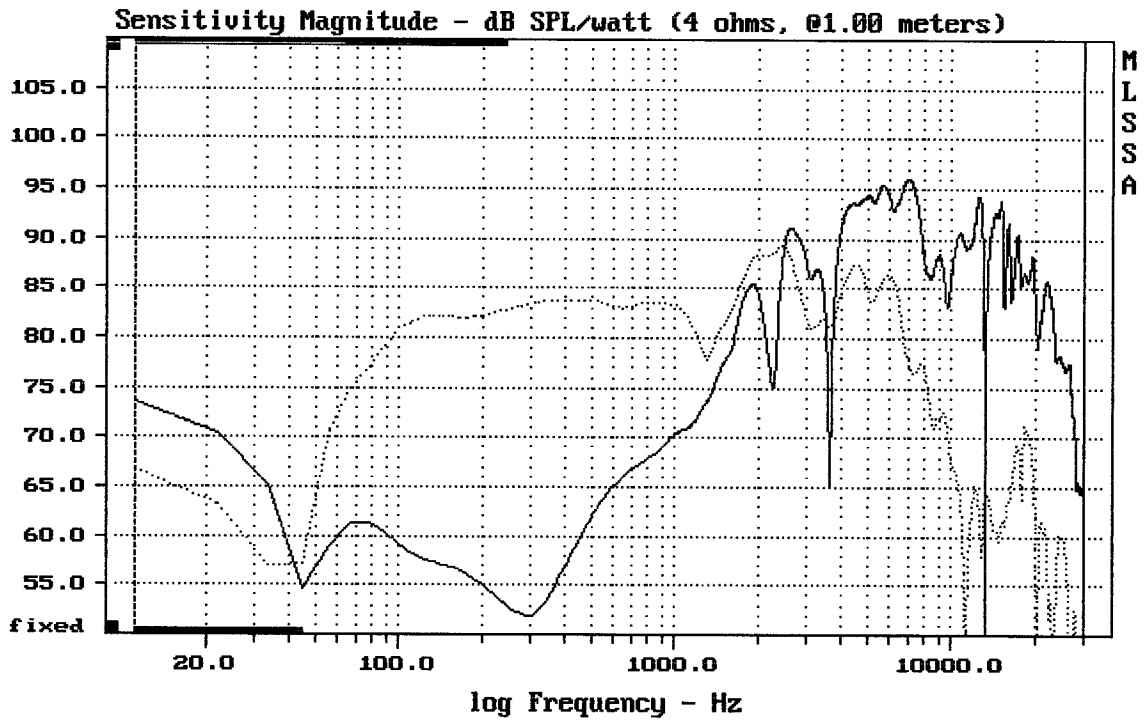

CURSOR: dy = -19.2769 x = 30007.1014 (2704)


2x SELENIUM 52V2A

MLSSA: Frequency Domain

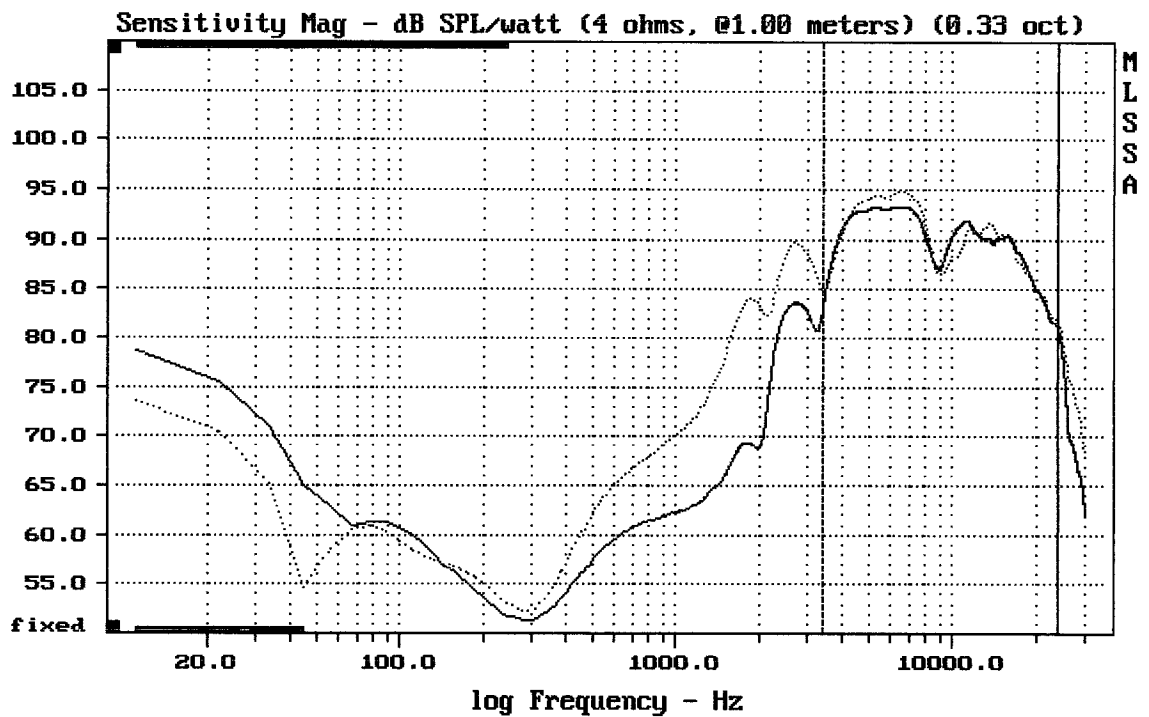

Overlay Compare: dev= +2.8/-1.7, std= 1, avg= -0.09


2x SELENIUM 52V2A

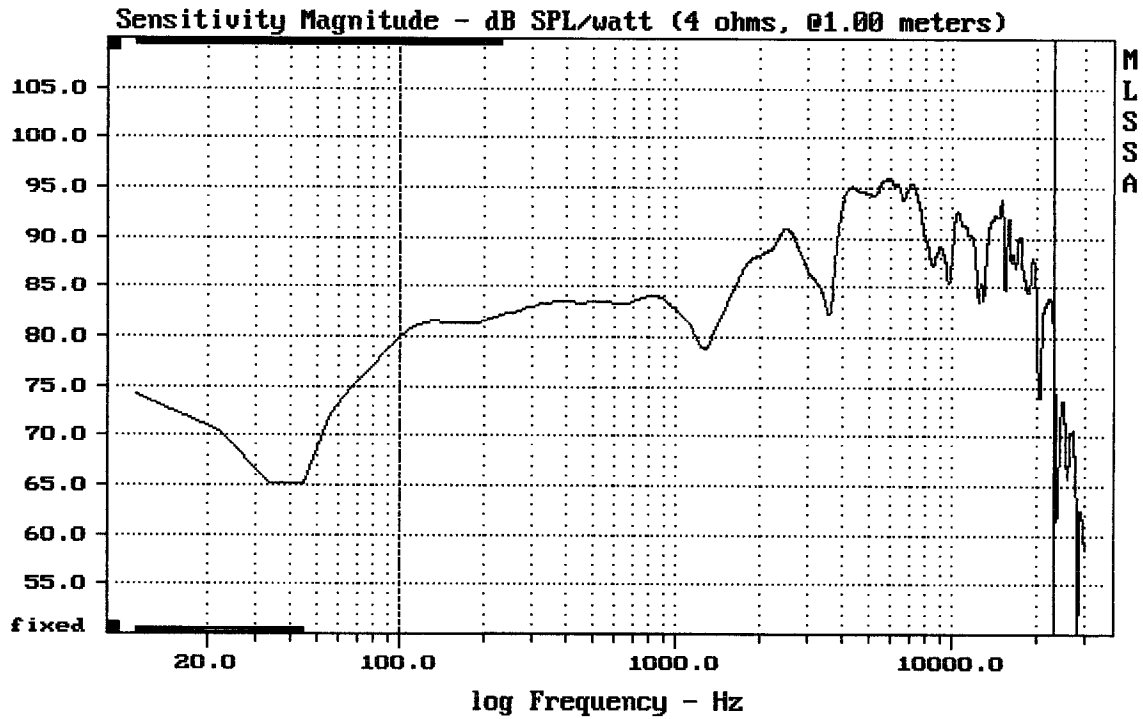


Level (100:23404 Hz) = 88.59 dB SPL/watt (4 ohms, @1.00 meters)

SELENIUM 52V2A

MLSSA: Frequency Domain

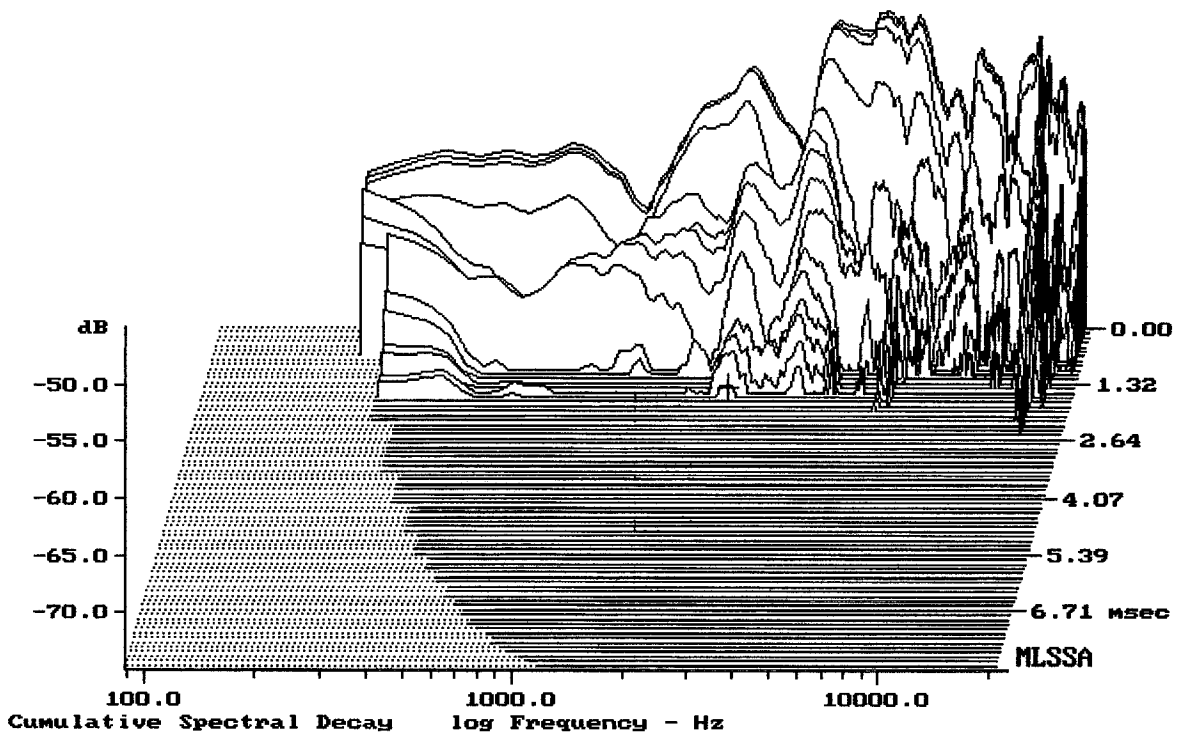


-74.21 dB, 2397 Hz (54), 1.650 msec (16)

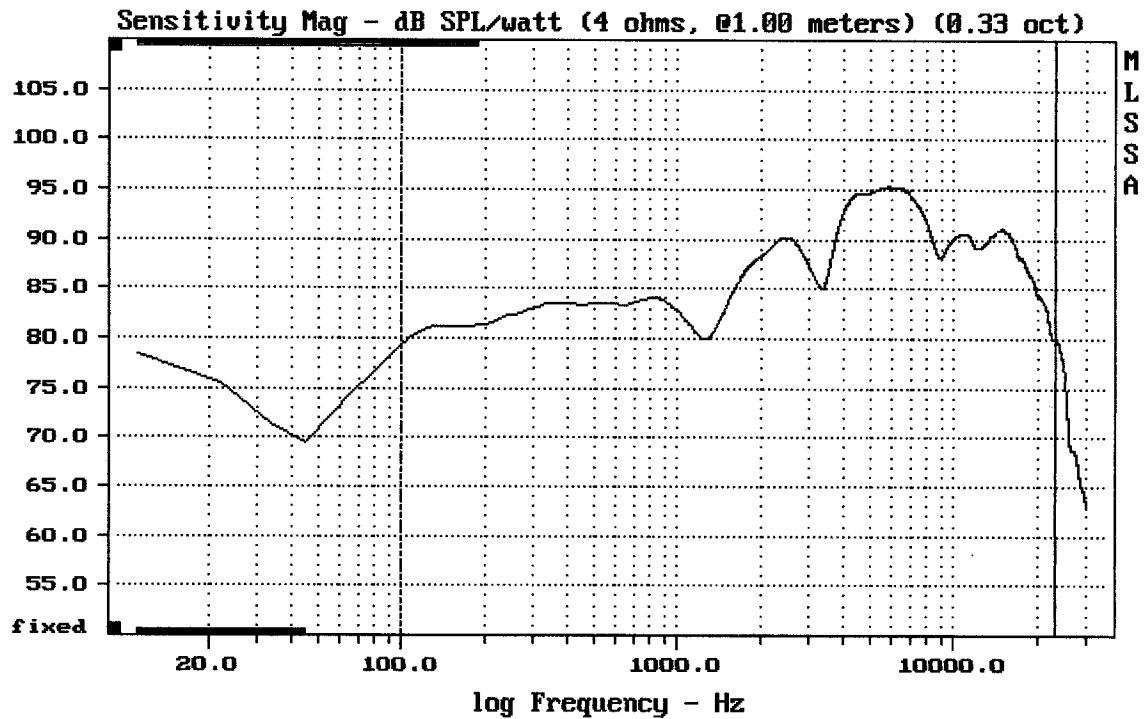

Level (100:23404 Hz) = 88.60 dB SPL/watt (4 ohms, @1.00 meters) (0.33 oct)

SELENIUM 52V2A

MLSSA: Frequency Domain

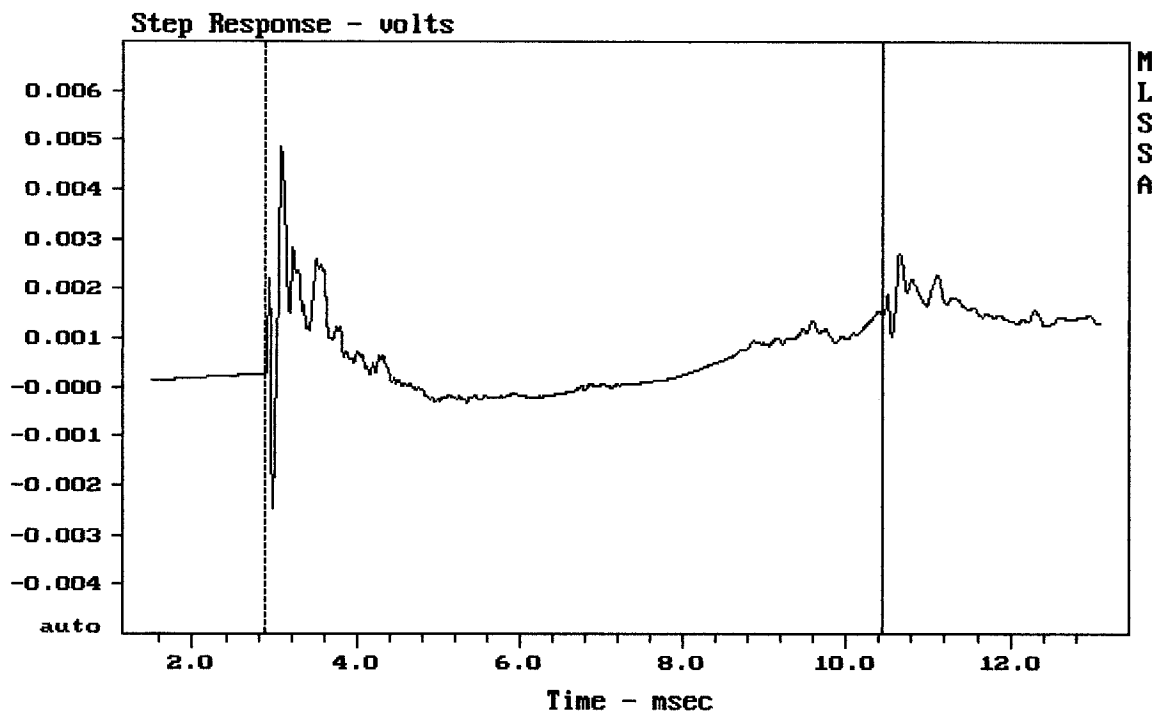

mean: 0.0005137, rms: 0.0009489, std: 0.0007977, max: 0.004849, min: -0.002471

SELENIUM 52V2A