


Level (67:7002 Hz) = 85.39 dB SPL/watt (4 ohms, @1.00 meters)

SELENIUM 62V2A

MLSSA: Frequency Domain

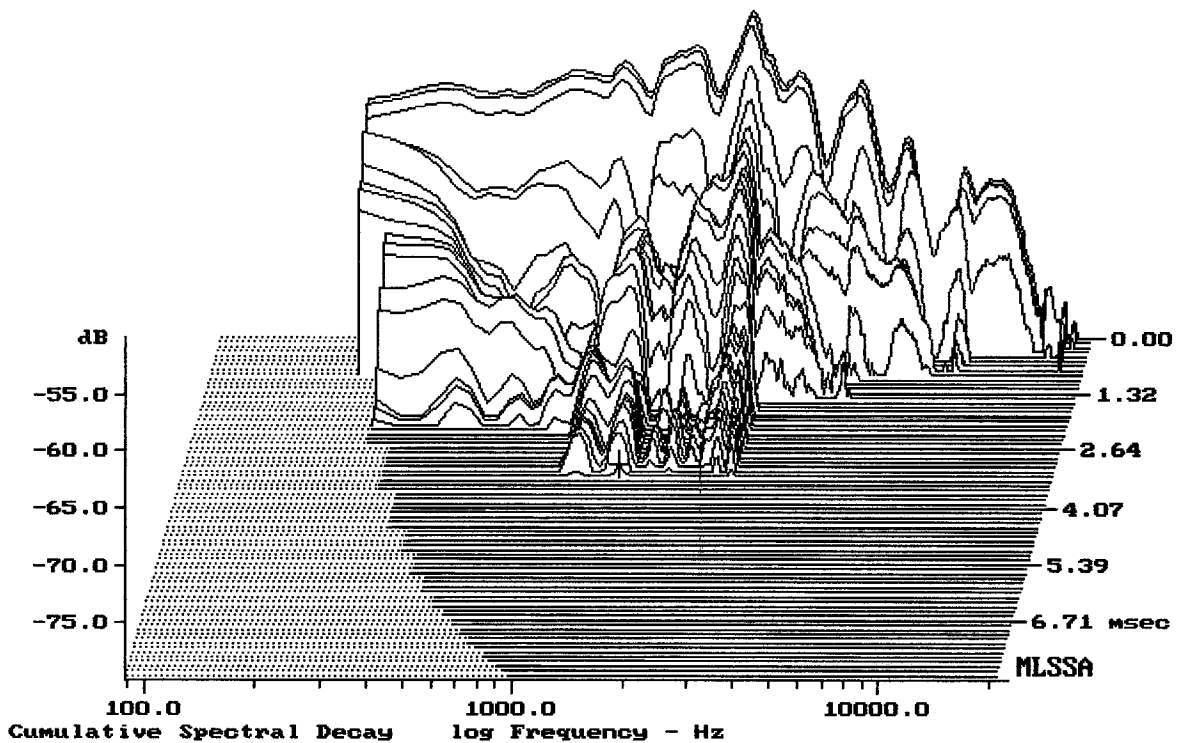

-78.99 dB, 1376 Hz (31), 3.300 msec (31)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.28	Ohms
2	Fs	81.94	Hz
3	Re	3.48	Ohms[dc]
4	Res	7.46	Ohms
5	Qms	3.64	
6	Qes	1.70	
7	Qts	1.16	
8	L1	0.06	mH
9	L2	0.25	mH
10	R2	1.75	Ohms
11	RMSE-load	0.12	Ohms
12	Vas(Sd)	8.70	liters
13	Mms	10.73	grams
14	Cms	352	$\mu\text{M}/\text{Newton}$
15	Bl	3.36	Tesla-M
16	SPLref(Sd)	86.3	dB[Re]
17	Rub-index	0.02	

Method: Mass-loaded (15.00 grams)

Area (Sd): 132.73 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -33.5% (-20% to -50% is recommended).


SELENIUM 62V2A

MLSSA: Parameters

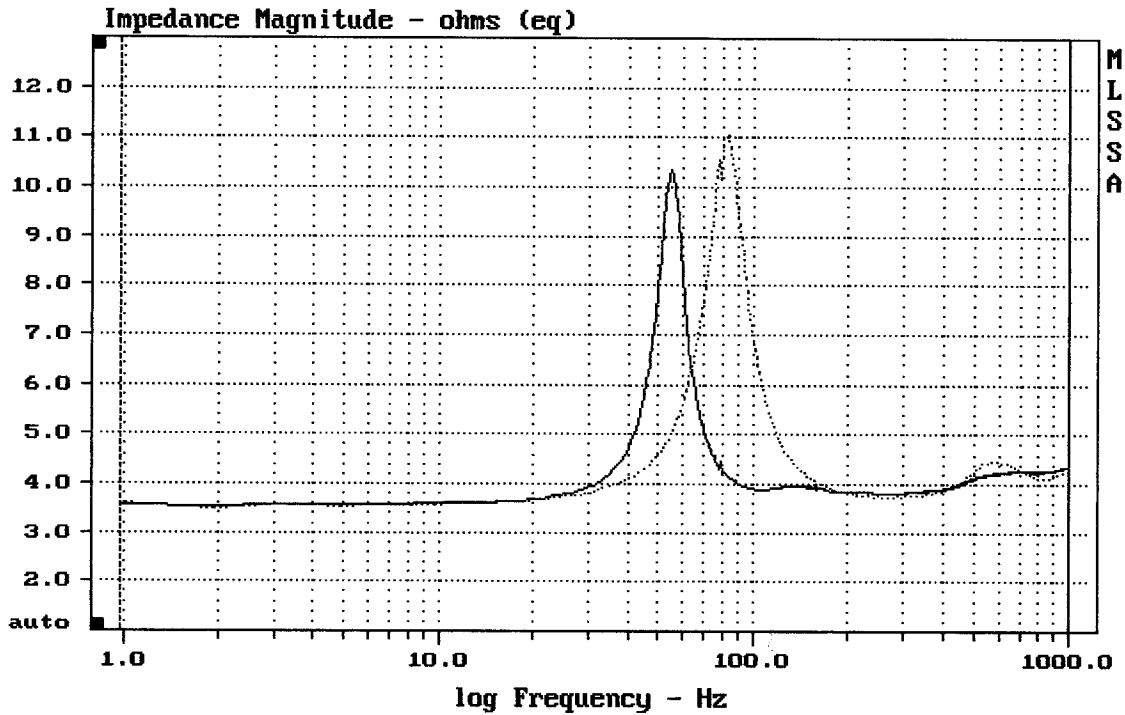

mean: 4.329, rms: 4.446, std: 1.013, max: 11.03, min: 3.508


MLSSA: Frequency Domain

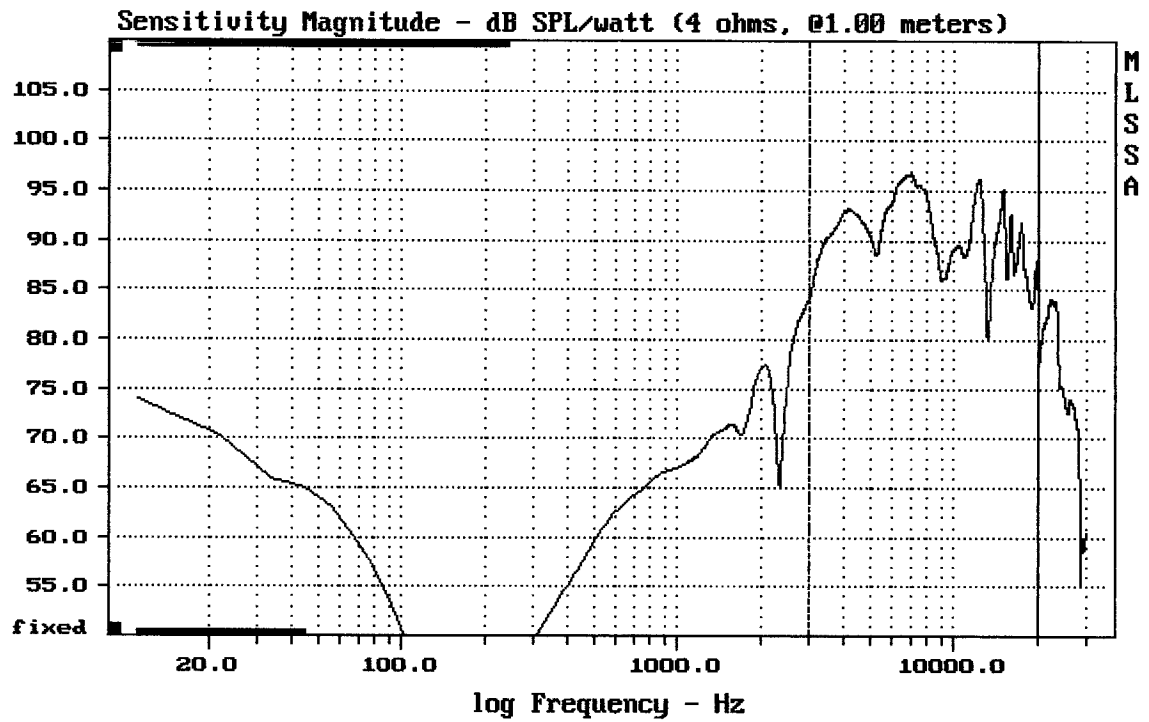


Level (2996:20000 Hz) = 92.01 dB SPL/watt (4 ohms, @1.00 meters)

SELENIUM 62V2A

MLSSA: Frequency Domain

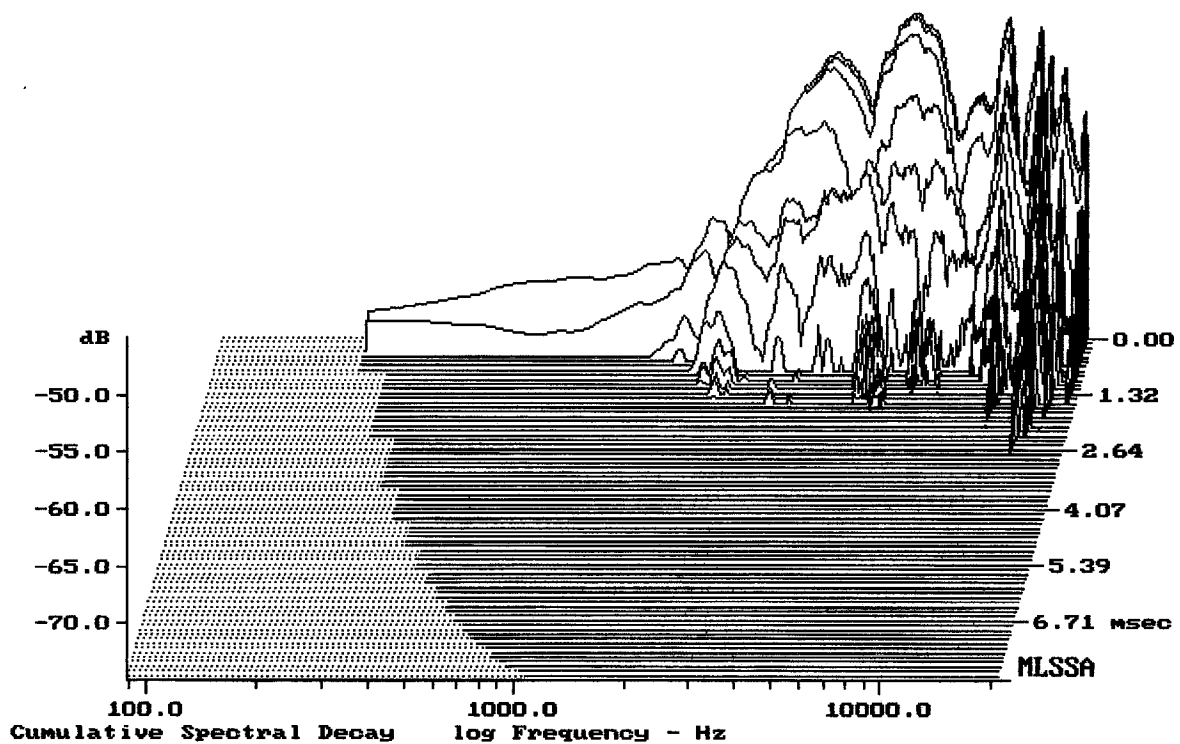


-74.75 dB, 5682 Hz (128), 1.430 msec (14)

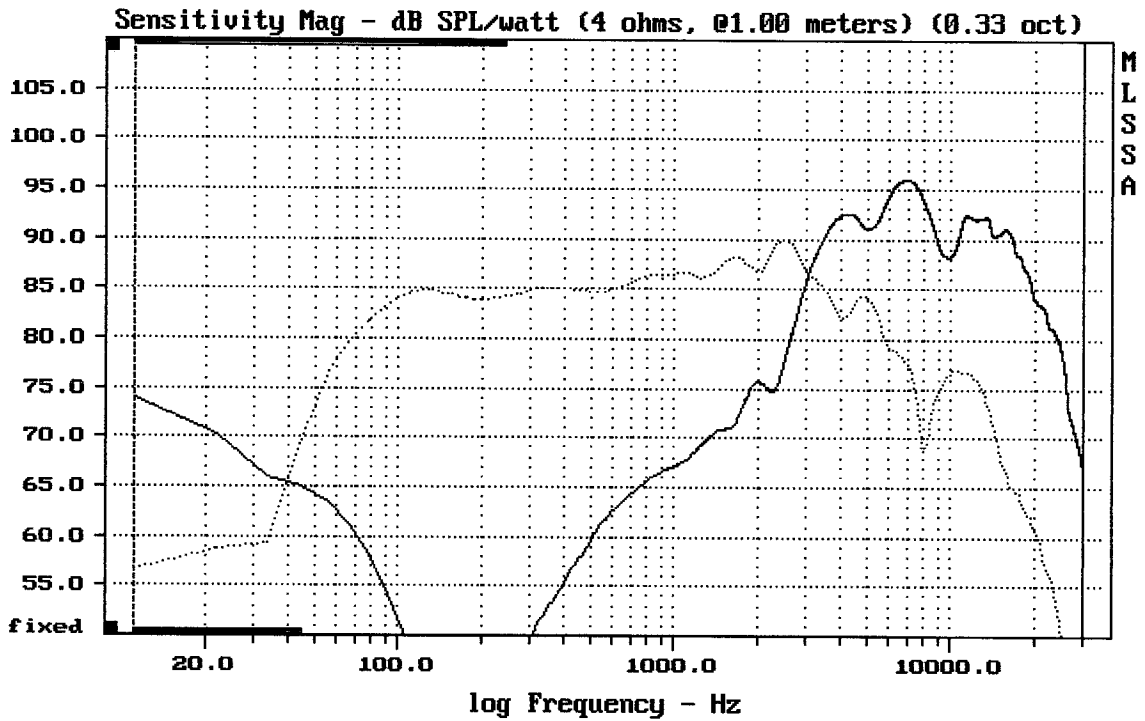

CURSOR: dy = -18.9223 x = 30007.1014 (2704)


SELENIUM 62V2A

MLSSA: Frequency Domain

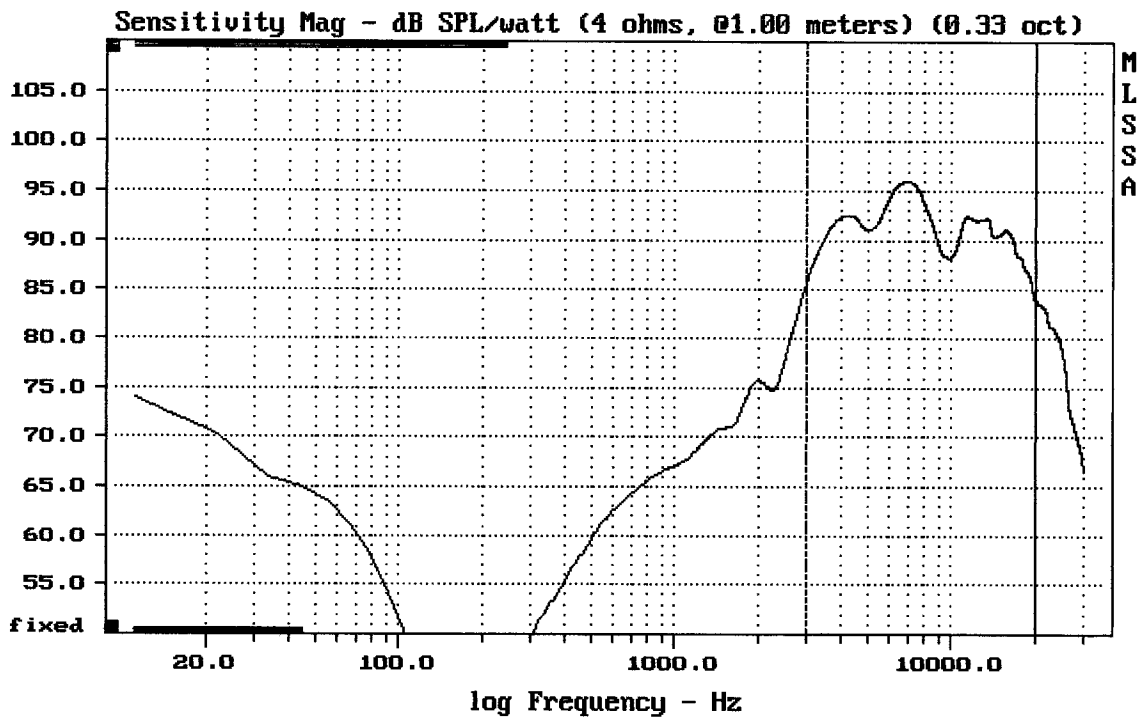

Level (2996:20000 Hz) = 91.99 dB SPL/watt (4 ohms, @1.00 meters) (0.33 oct)


SELENIUM 62V2A

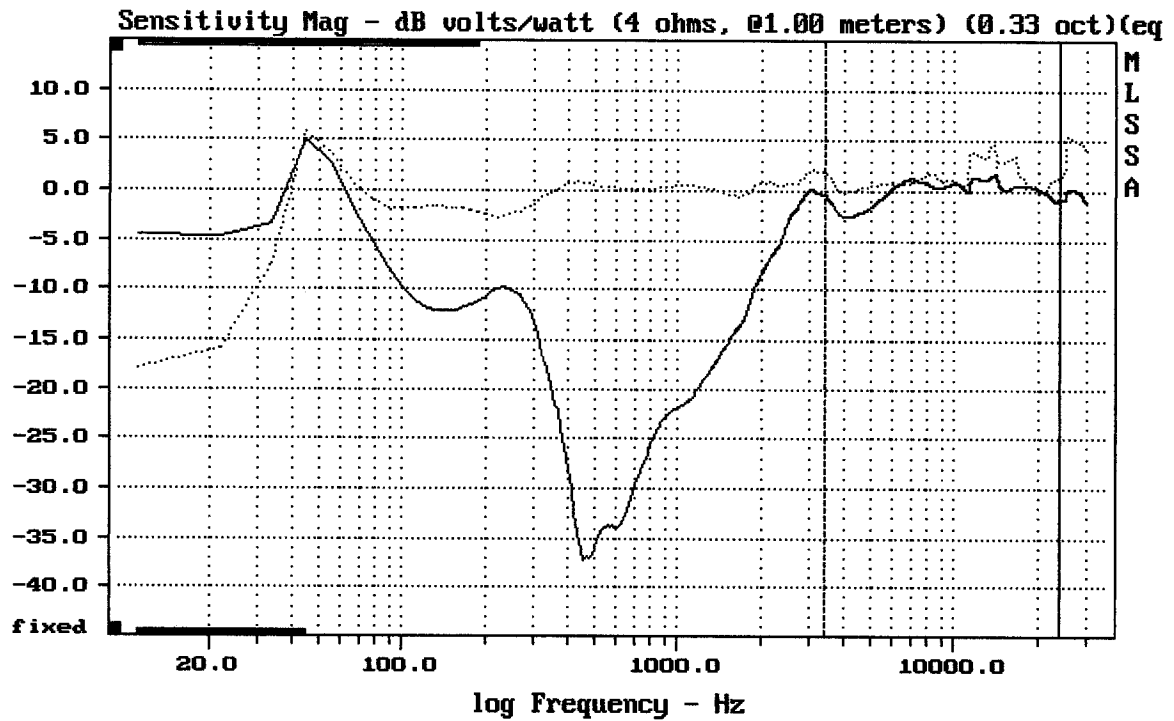

Overlay Compare: dev= +1.7/-1.9, std= 1.1, avg= -1.3


TWEETER 62V2A / +XOVER ---

MLSSA: Frequency Domain

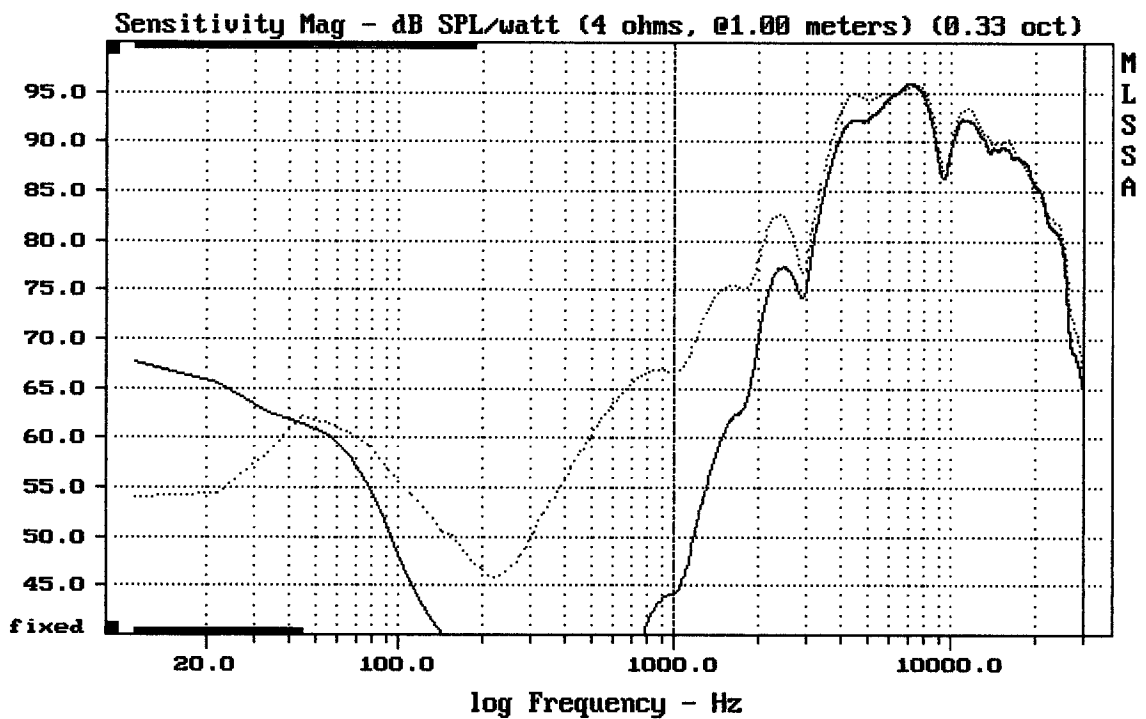

Overlay Compare: dev= +2.9/-21, std= 3, avg= -1.6


TWEETER 62V2A / +XOVER ---

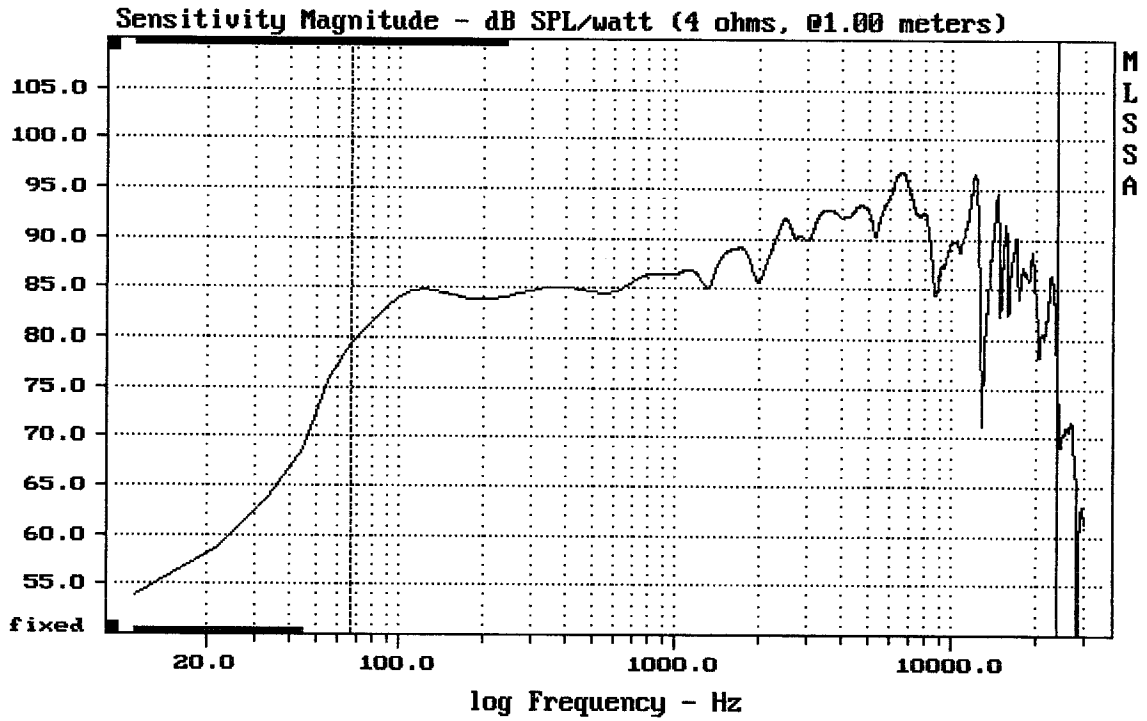


Level (67:23804 Hz) = 88.86 dB SPL/watt (4 ohms, @1.00 meters)

SELENIUM 62V2A

MLSSA: Frequency Domain

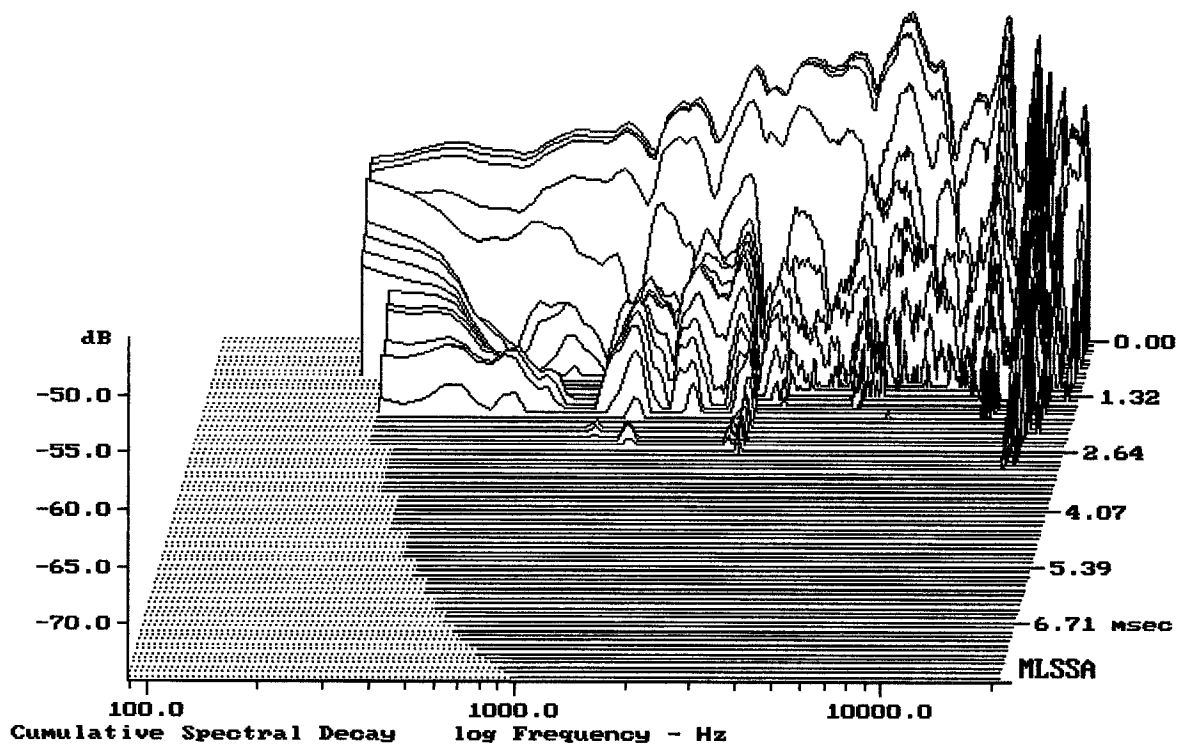


-73.99 dB, 2708 Hz (61), 2.640 msec (25)

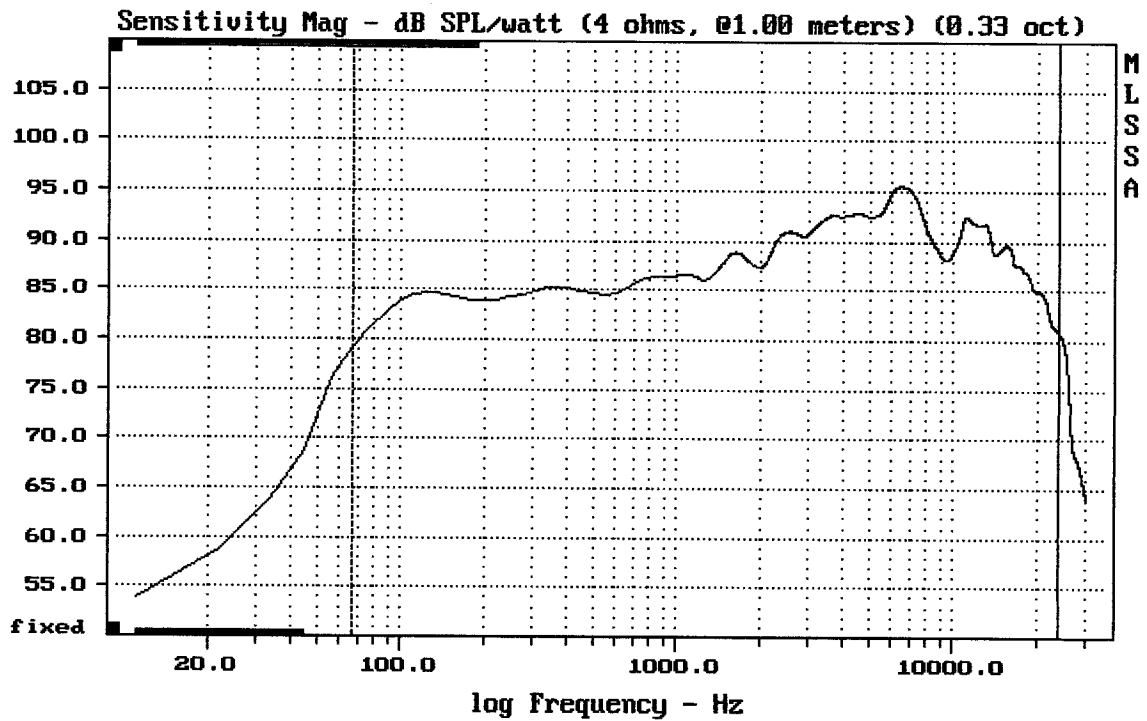

Level (67:23804 Hz) = 88.88 dB SPL/watt (4 ohms, @1.00 meters) (0.33 oct)

SELENIUM 62V2A

MLSSA: Frequency Domain

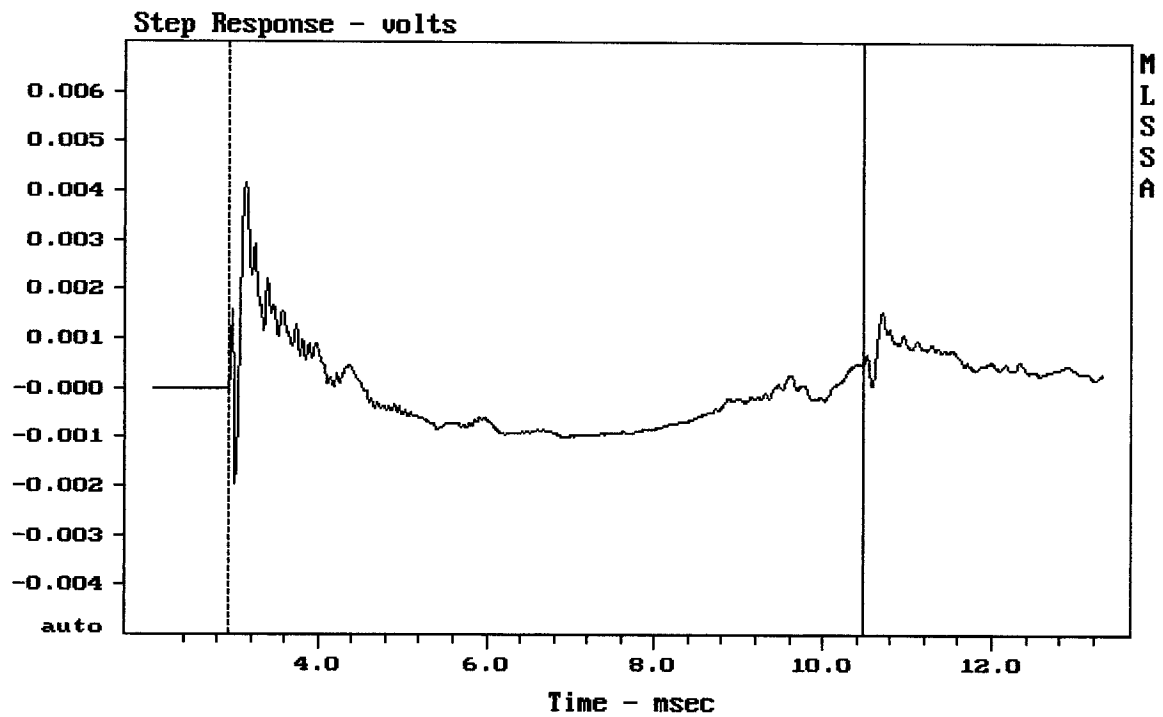

mean: -0.000207, rms: 0.0008767, std: 0.0008519, max: 0.004166, min: -0.001973

SELENIUM 62V2A