

Line	Parameter	Value	Units
1	RMSE-free	1.08	Ohms
2	Fs	44.95	Hz
3	Re	5.97	Ohms[dc]
4	Res	293.42	Ohms
5	Qms	20.92	
6	Qes	0.43	
7	Qts	0.42	
8	L1	0.81	mH
9	L2	1.59	mH
10	R2	12.44	Ohms
11	RMSE-load	1.47	Ohms
12	Vas(Sd)	140.82	liters
13	Mms	86.05	grams
14	Cms	146	$\mu\text{M}/\text{Newton}$
15	B1	18.46	Tesla-M
16	SPLref(Sd)	96.6	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (80.00 grams)

Area (Sd): 829.58 sq cm


DCR mode: Measure (-0.06 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -26.1% (-20% to -50% is recommended).

SELENIUM WPU1509


MLSSA: Parameters

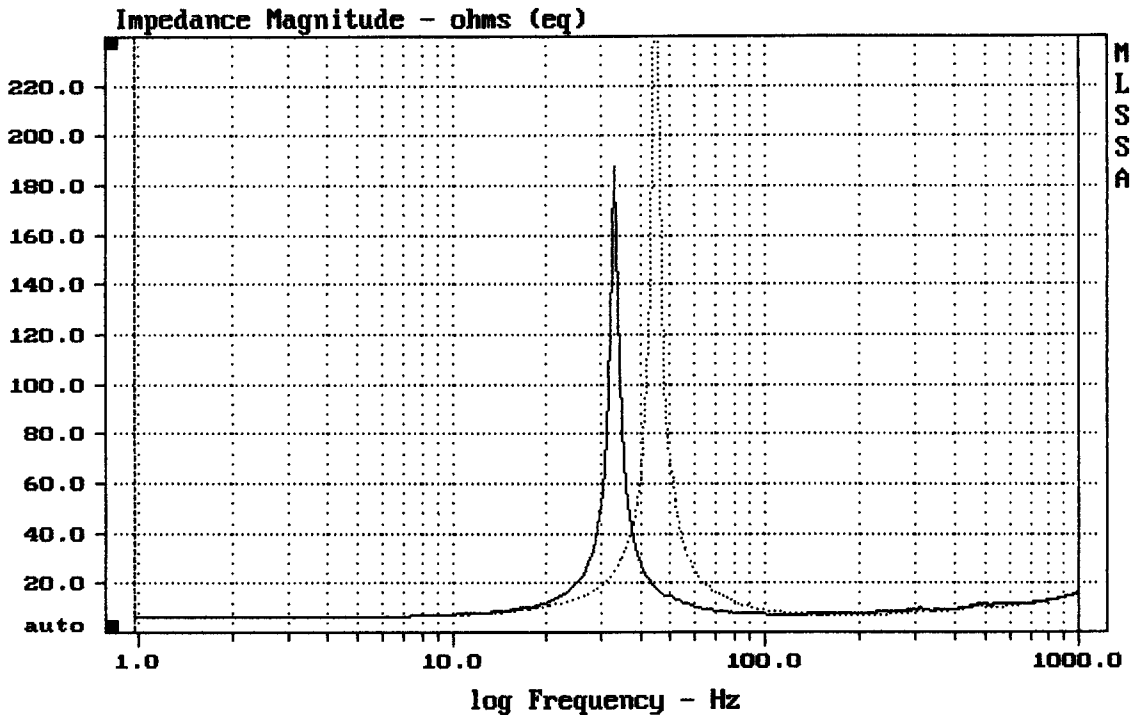

mean: 12.64, rms: 20.28, std: 15.86, max: 298.5, min: 6.82

DTTO

MLSSA: Frequency Domain

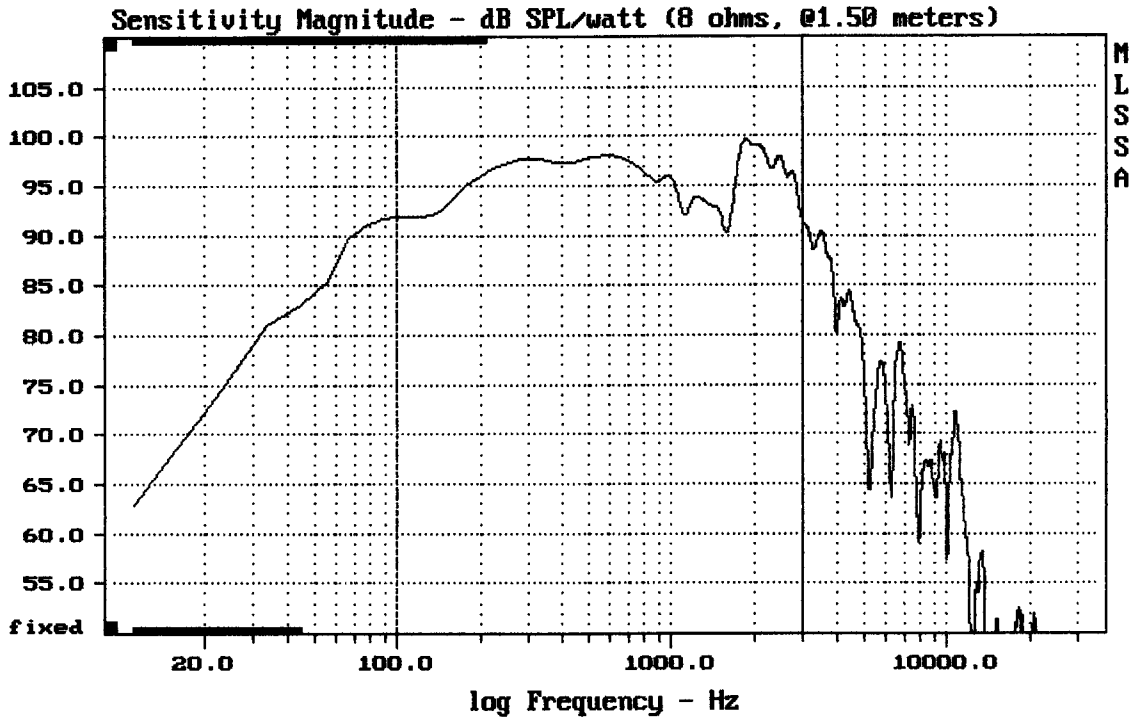



---

Level (100:2996 Hz) = 96.25 dB SPL/watt (8 ohms, @1.50 meters)

---

**SELENIUM WPU1509**

**MLSSA: Frequency Domain**

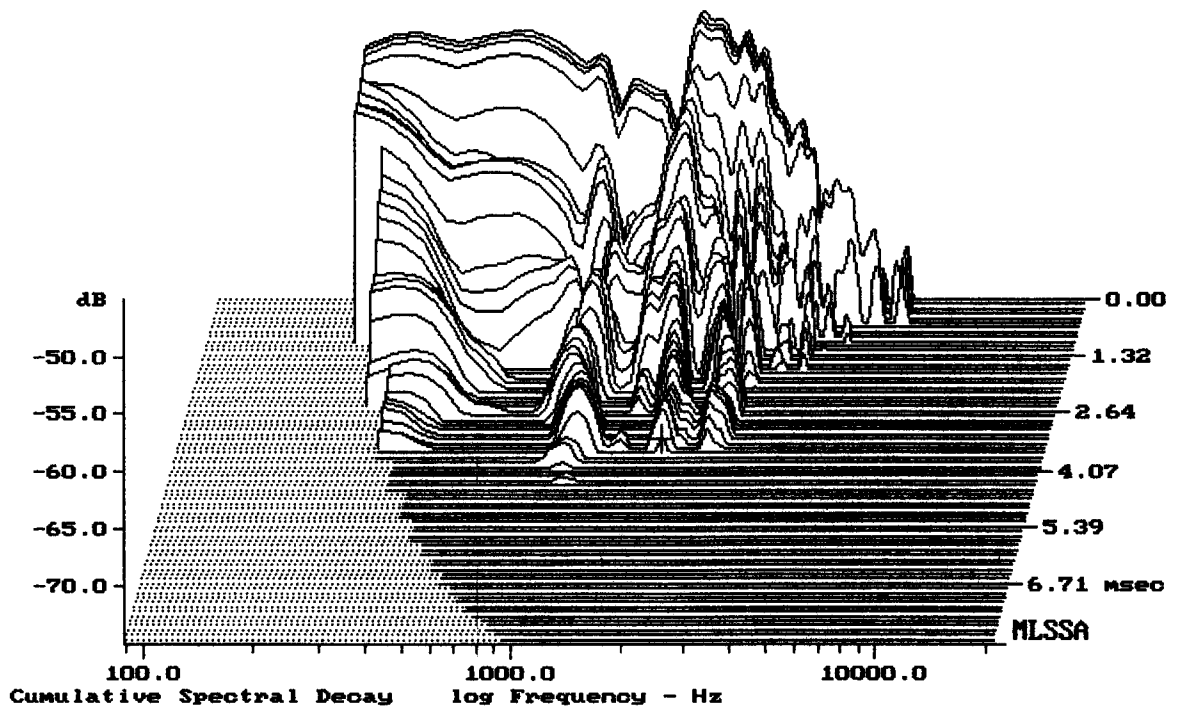

-73.77 dB, 1864 Hz (42), 3.630 msec (34)