

MLSSA SPO 4.0D #960903-3057-3075 for Pro Dance Praha
 Measured Data QC Limits

| Line | Parameter | Value | Units |
|------|------------|--------|-----------------------------|
| 1 | RMSE-free | 0.83 | Ohms |
| 2 | Fs | 50.77 | Hz |
| 3 | Re | 6.30 | Ohms[dc] |
| 4 | Res | 14.85 | Ohms |
| 5 | Qms | 1.30 | |
| 6 | Qes | 0.55 | |
| 7 | Qts | 0.39 | |
| 8 | L1 | 1.73 | mH |
| 9 | L2 | 2.84 | mH |
| 10 | R2 | 12.83 | Ohms |
| 11 | RMSE-load | 0.81 | Ohms |
| 12 | Vas(Sd) | 146.89 | liters |
| 13 | Mms | 124.27 | grams |
| 14 | Cms | 79 | $\mu\text{M}/\text{Newton}$ |
| 15 | B1 | 21.32 | Tesla-M |
| 16 | SPLref(Sd) | 97.3 | dB[Re] |
| 17 | Rub-index | 0.10 | |

Method: Mass-loaded (100.00 grams)

Area (Sd): 1150.00 sq cm


DCR mode: Measure (-0.27 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -25.9% (-20% to -50% is recommended).

PD186 8 ohm

MLSSA: Parameters

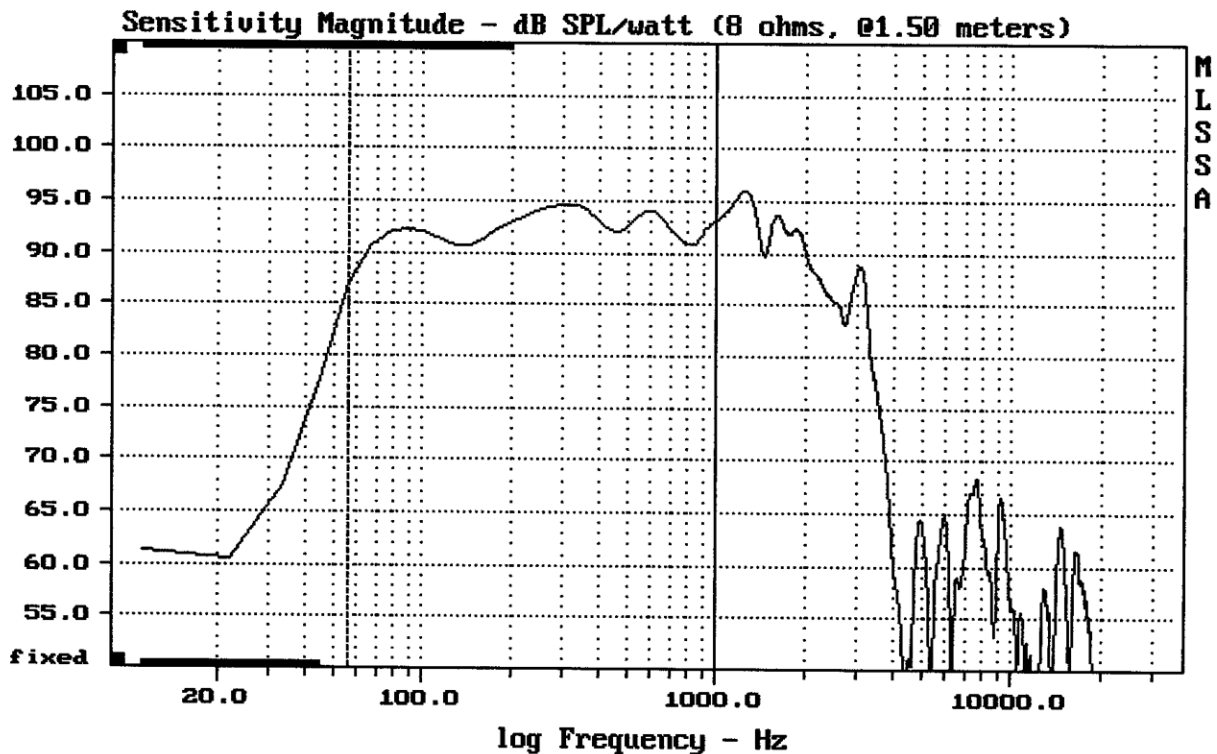

Level (55:999 Hz) = 92.46 dB SPL/watt (8 ohms, @1.50 meters)

P.D.186

MLSSA: Frequency Domain