

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.63	Ohms
2	Fs	41.17	Hz
3	Re	5.40	Ohms[dc]
4	Res	119.58	Ohms
5	Qms	5.90	
6	Qes	0.27	
7	Qts	0.25	
8	L1	1.02	mH
9	L2	1.55	mH
10	R2	4.46	Ohms
11	RMSE-load	0.84	Ohms
12	Vas(Sd)	165.24	liters
13	Mms	98.71	grams
14	Cms	151	$\mu\text{M}/\text{Newton}$
15	B1	22.75	Tesla-M
16	SPLref(Sd)	98.2	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (80.00 grams)

Area (Sd): 881.41 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -25.5% (-20% to -50% is recommended).

15NW76


MLSSA: Parameters

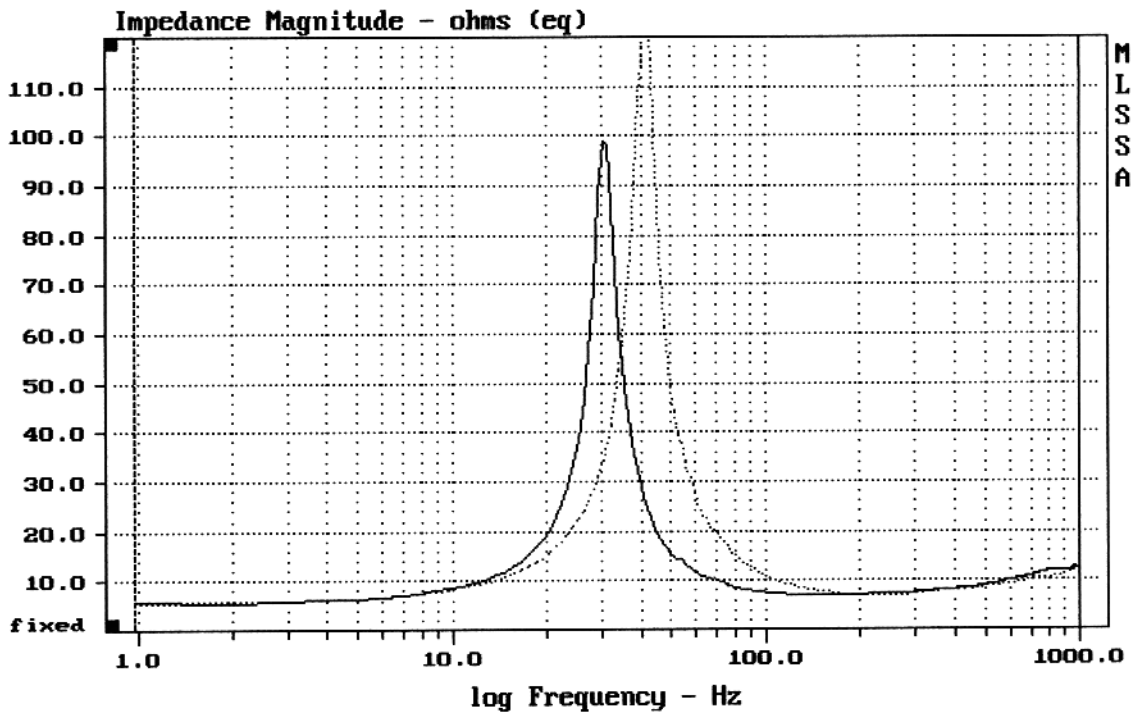

Autoscale off

DTTO


MLSSA: Frequency Domain

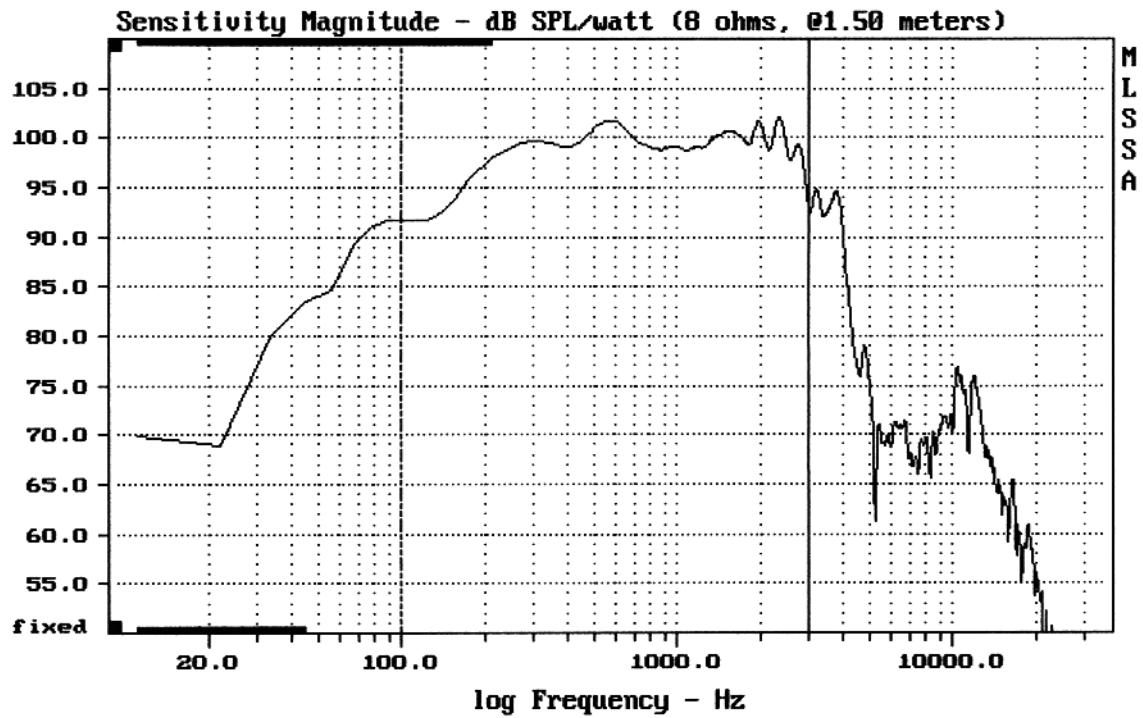

Level (100:2996 Hz) = 98.98 dB SPL/watt (8 ohms, @1.50 meters)

15NW76

MLSSA: Frequency Domain

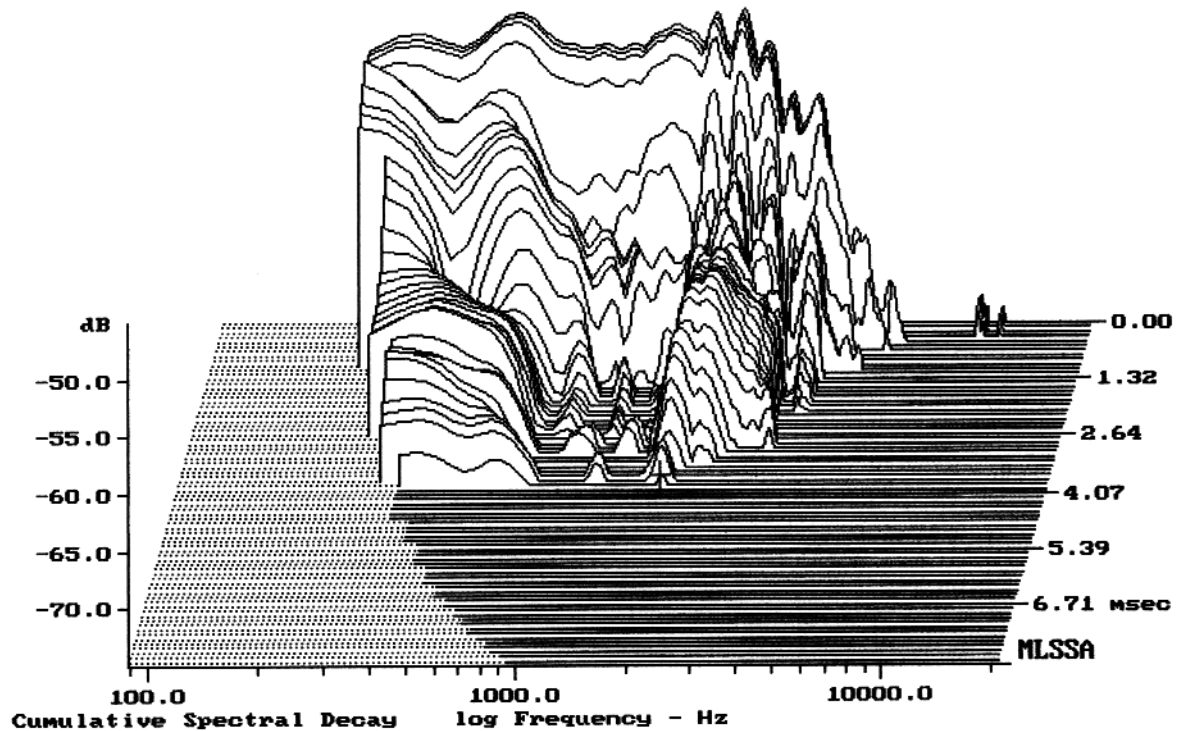

-74.09 dB, 1820 Hz (41), 3.850 msec (36)