

Measured Data

QC Limits

| Line | Parameter | Value | Units |
|------|------------|--------|-----------------------------|
| 1 | RMSE-free | 0.60 | Ohms |
| 2 | Fs | 42.87 | Hz |
| 3 | Re | 5.45 | Ohms[dc] |
| 4 | Res | 110.77 | Ohms |
| 5 | Qms | 7.07 | |
| 6 | Qes | 0.35 | |
| 7 | Qts | 0.33 | |
| 8 | L1 | 0.89 | mH |
| 9 | L2 | 1.91 | mH |
| 10 | R2 | 9.23 | Ohms |
| 11 | RMSE-load | 1.16 | Ohms |
| 12 | Vas(Sd) | 166.54 | liters |
| 13 | Mms | 85.04 | grams |
| 14 | Cms | 162 | $\mu\text{M}/\text{Newton}$ |
| 15 | B1 | 18.94 | Tesla-M |
| 16 | SPLref(Sd) | 97.6 | dB[Re] |
| 17 | Rub-index | 0.13 | |

EBP: 129,9

Method: Mass-loaded (160.00 grams)

Area (Sd): 855.30 sq cm


DCR mode: Measure (-0.27 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -40.9% (-20% to -50% is recommended).


15PK40

MLSSA: Parameters

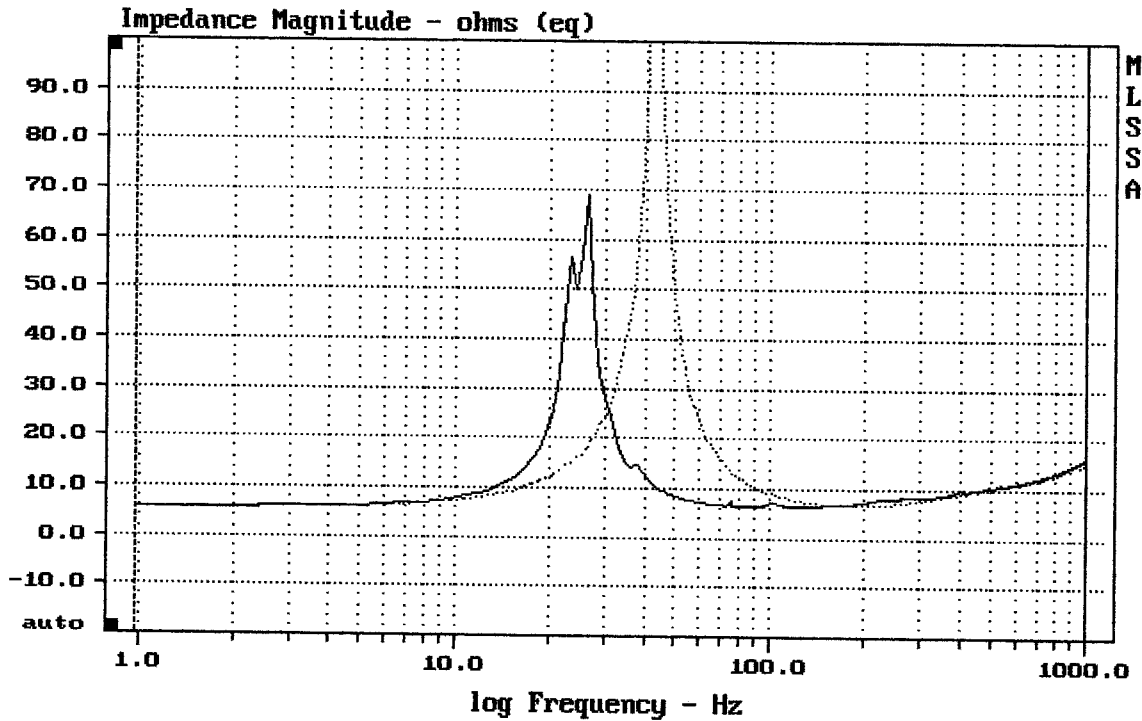

CURSOR: dy = -1.35487 x = 1000.9766 (1025)

MLSSA: Frequency Domain

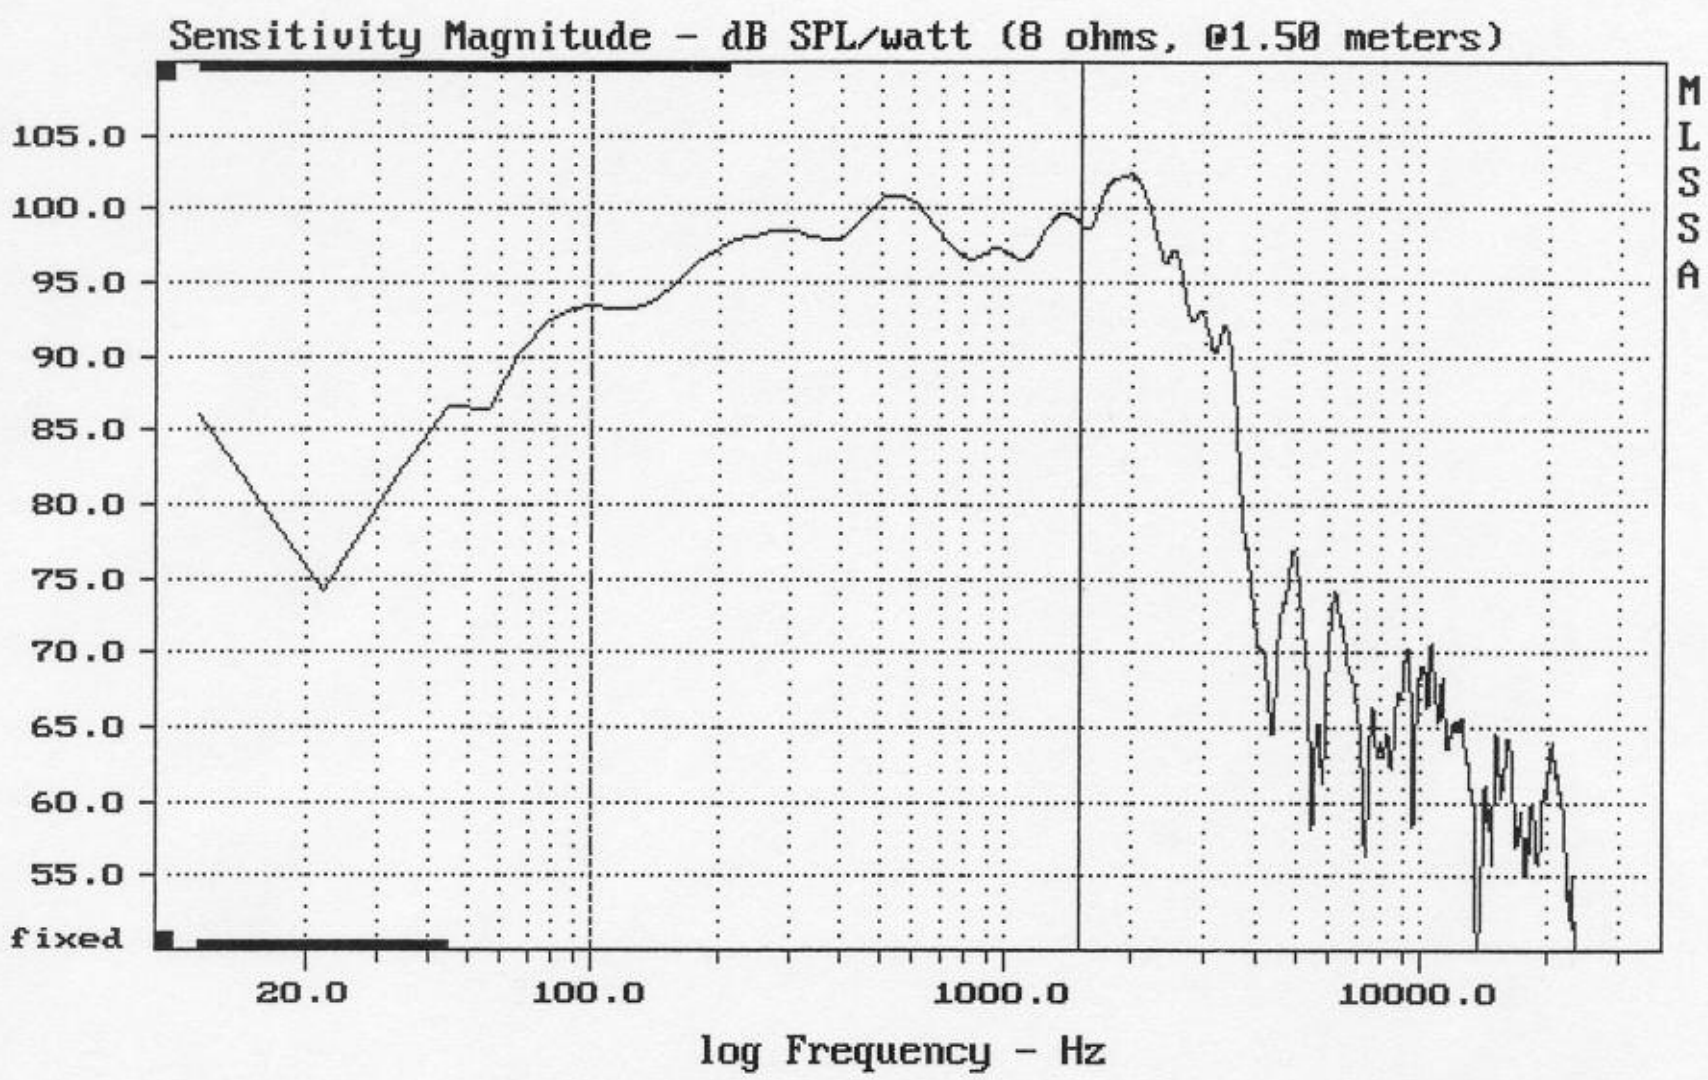

Level (100:1509 Hz) = 97.85 dB SPL/watt (8 ohms, @1.50 meters)

15PK40