

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

| Line | Parameter | Value | Units |
|------|------------|--------|-----------------------------|
| 1 | RMSE-free | 0.70 | Ohms |
| 2 | Fs | 43.44 | Hz |
| 3 | Re | 5.08 | Ohms[dc] |
| 4 | Res | 83.78 | Ohms |
| 5 | Qms | 4.39 | |
| 6 | Qes | 0.27 | |
| 7 | Qts | 0.25 | |
| 8 | L1 | 0.78 | mH |
| 9 | L2 | 1.86 | mH |
| 10 | R2 | 11.78 | Ohms |
| 11 | RMSE-load | 0.78 | Ohms |
| 12 | Vas(Sd) | 166.30 | liters |
| 13 | Mms | 82.89 | grams |
| 14 | Cms | 162 | $\mu\text{M}/\text{Newton}$ |
| 15 | B1 | 20.78 | Tesla-M |
| 16 | SPLref(Sd) | 98.9 | dB[Re] |
| 17 | Rub-index | 0.14 | |

EBP:173,8

Method: Mass-loaded (100.00 grams)

Area (Sd): 855.00 sq cm


DCR mode: Measure (-0.26 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -29.7% (-20% to -50% is recommended).

15PW40

MLSSA: Parameters

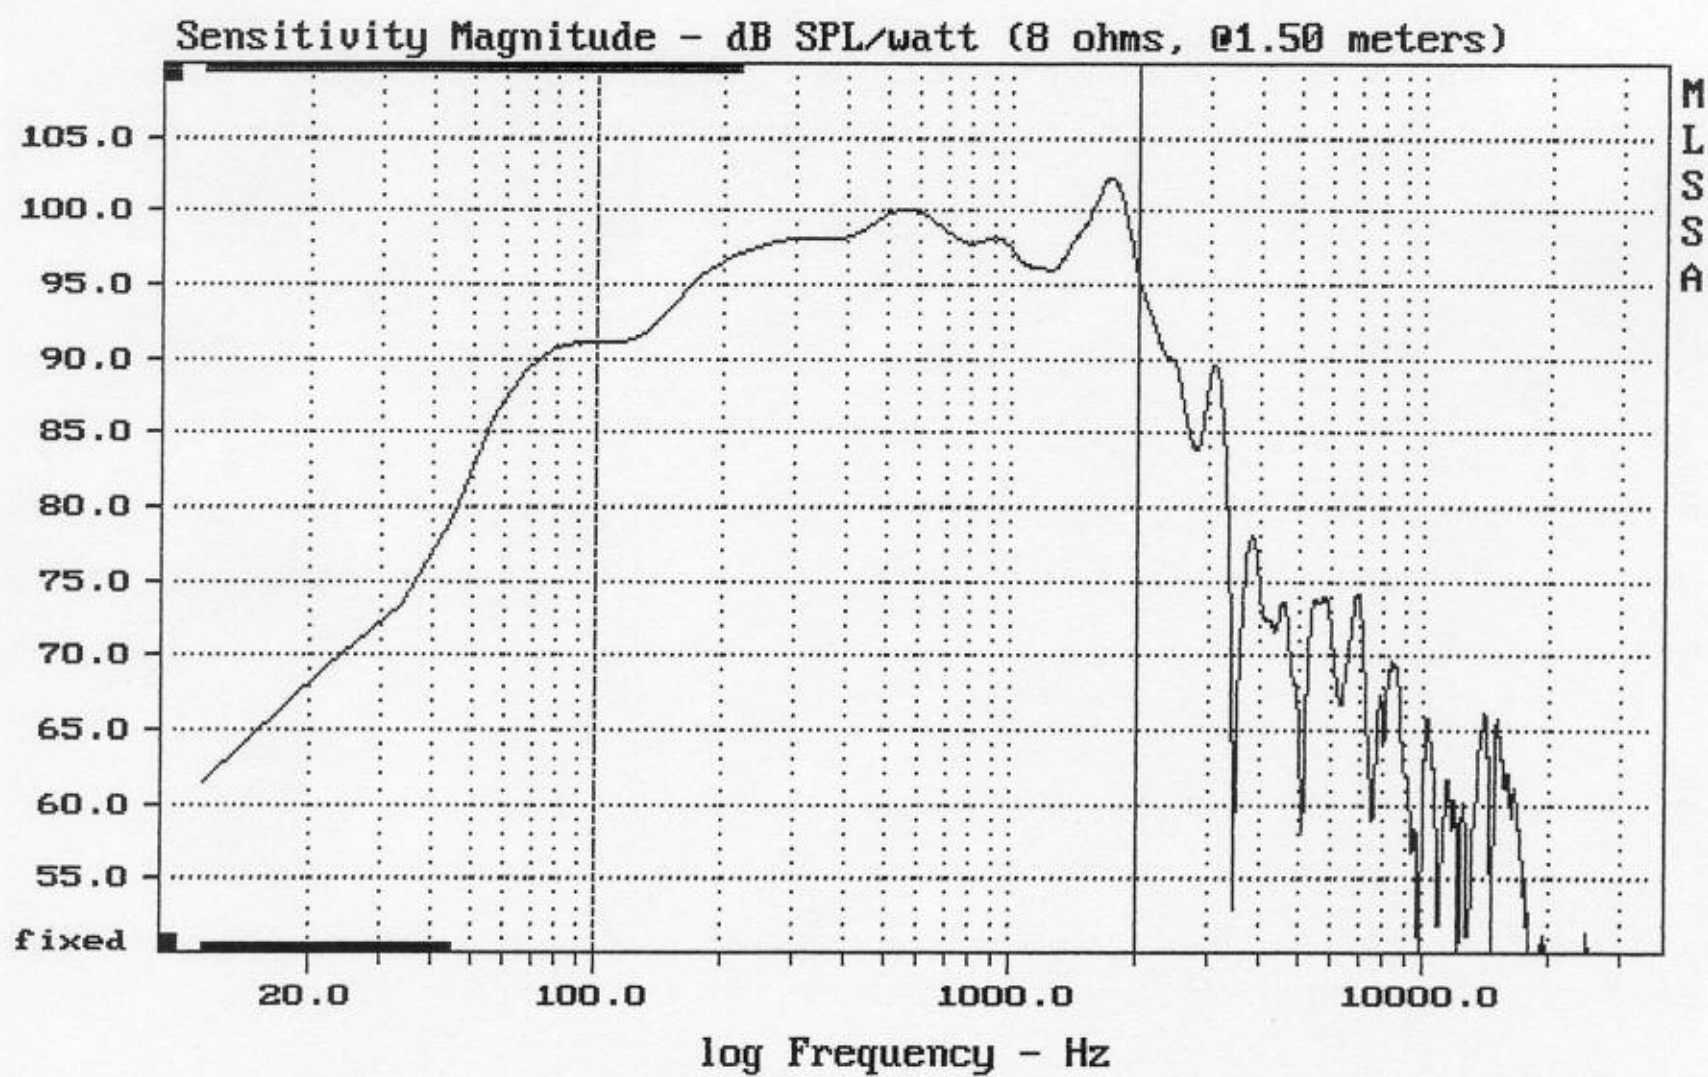

Level (100:2009 Hz) = 97.79 dB SPL/watt (8 ohms, @1.50 meters)

15PW40