


Level (100:3018 Hz) = 94.40 dB SPL/watt (4 ohms, @1.00 meters)

12CL76-4

MLSSA: Frequency Domain

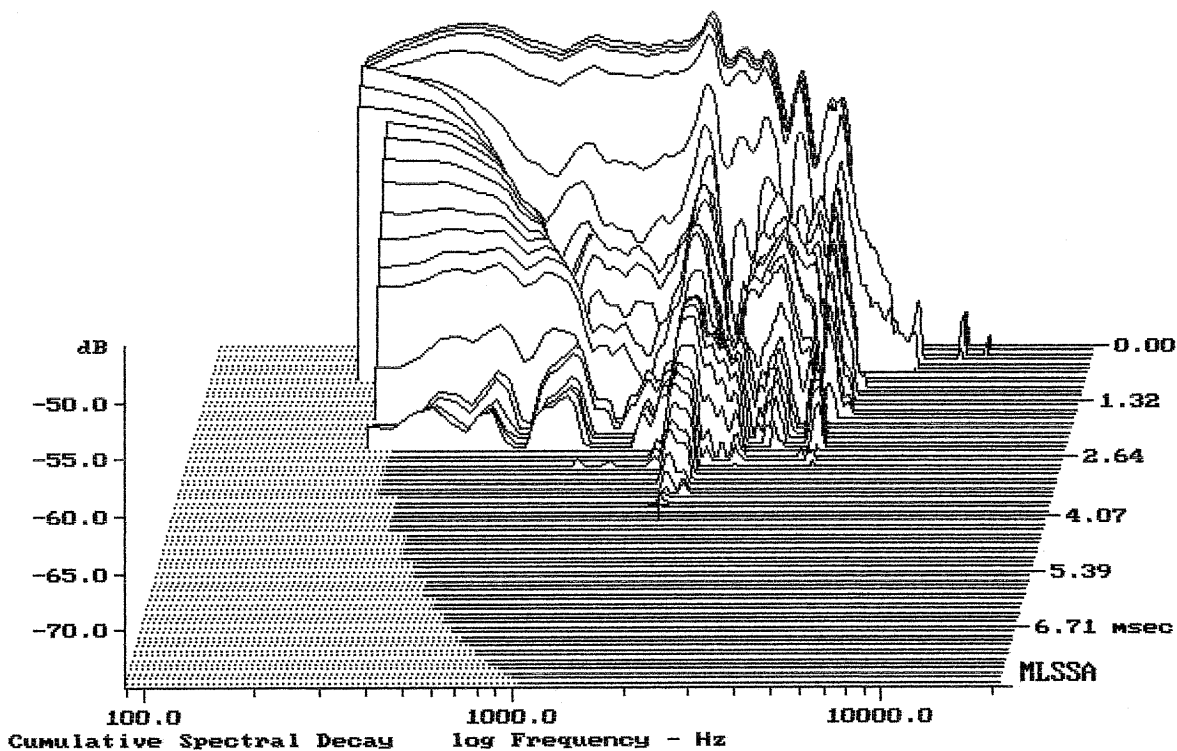

-74.80 dB, 1820 Hz (41), 3.850 msec (36)

DT10

Measured Data				QC Limits
Line	Parameter	Value	Units	
1	RMSE-free	0.70	Ohms	
2	Fs	58.86	Hz	
3	Re	3.46	Ohms[dc]	
4	Res	50.87	Ohms	
5	Qms	4.24		
6	Qes	0.29		
7	Qts	0.27		
8	L1	0.67	mH	
9	L2	0.98	mH	
10	R2	5.76	Ohms	
11	RMSE-load	0.74	Ohms	
12	Vas(Sd)	51.41	liters	
13	Mms	56.29	grams	
14	Cms	130	$\mu\text{M}/\text{Newton}$	
15	B1	15.80	Tesla-M	
16	SPLref(Sd)	97.4	dB[Re]	
17	Rub-index	0.01		

Method: Mass-loaded (60.00 grams)

Area (Sd): 530.93 sq cm


DCR mode: Measure (-0.14 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -28.1% (-20% to -50% is recommended).

12CL76-4

MLSSA: Parameters

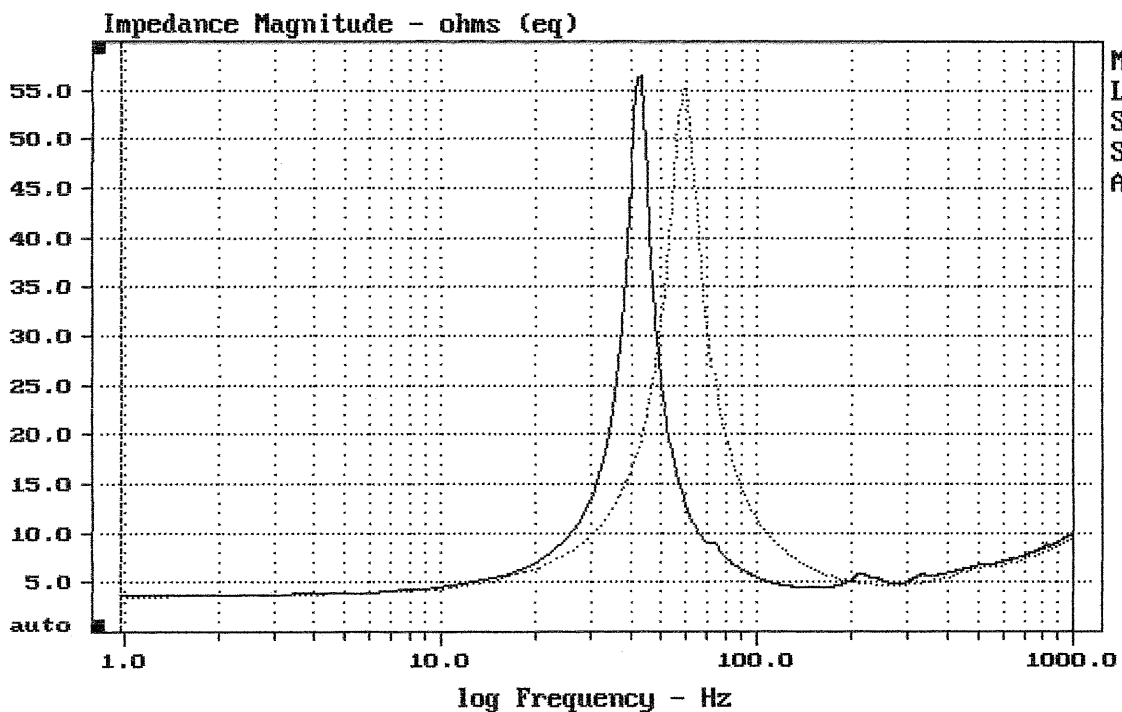

mean: 8.114, rms: 10.14, std: 6.074, max: 55.39, min: 3.603

10MBX64

MLSSA: Frequency Domain