


Level (100:2200 Hz) = 93.65 dB SPL/watt (4 ohms, @1.00 meters)

12FS76-4ohm

MLSSA: Frequency Domain

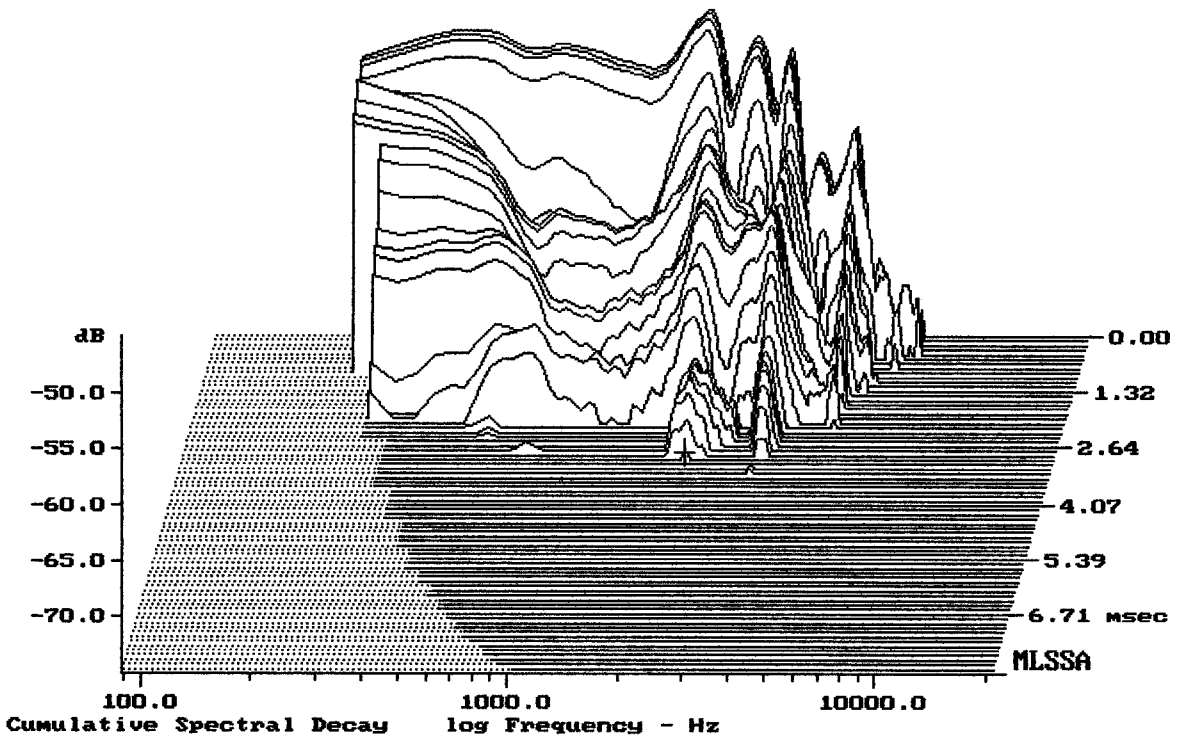

-74.34 dB, 2086 Hz (47), 2.970 msec (28)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.40	Ohms
2	Fs	57.50	Hz
3	Re	3.02	Ohms[dc]
4	Res	61.98	Ohms
5	Qms	5.45	
6	Qes	0.27	
7	Qts	0.25	
8	L1	0.86	mH
9	L2	1.20	mH
10	R2	3.42	Ohms
11	RMSE-load	0.51	Ohms
12	Vas(Sd)	44.97	liters
13	Mms	67.44	grams
14	Cms	114	$\mu\text{M}/\text{Newton}$
15	Bl	16.64	Tesla-M
16	SPLref(Sd)	96.9	dB[Re]
17	Rub-index	0.03	

Method: Mass-loaded (80.00 grams)

Area (Sd): 530.93 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -32.9% (-20% to -50% is recommended).

12PS76-4ohm

MLSSA: Parameters

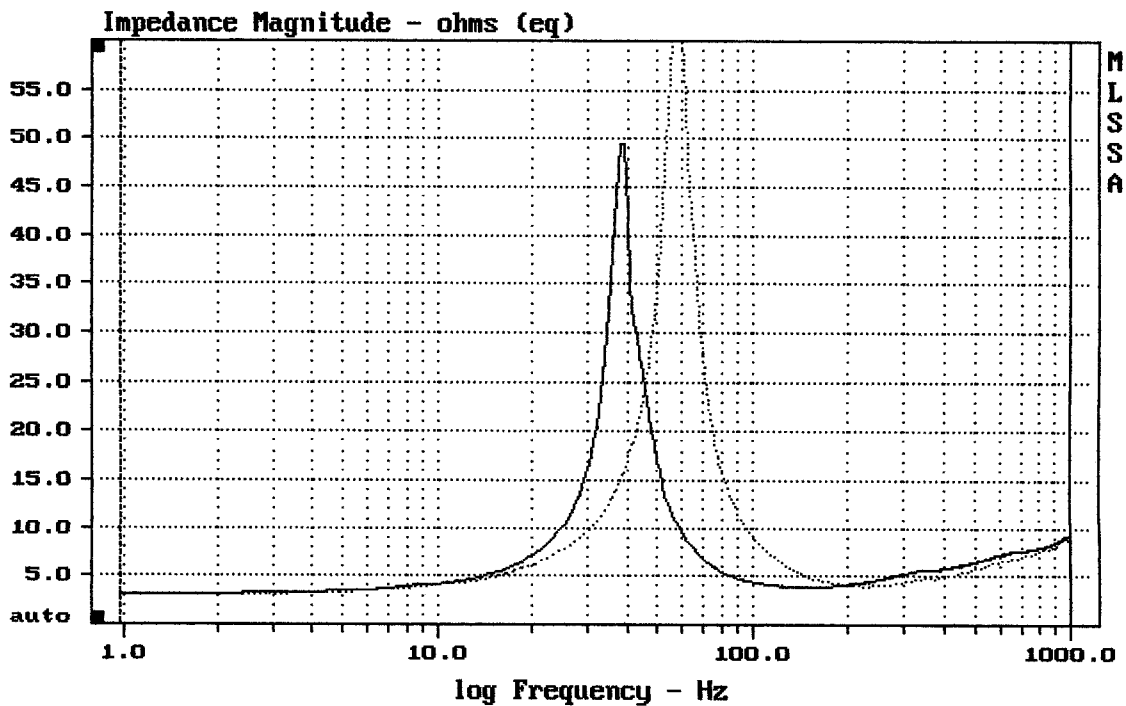

mean: 7.539, rms: 10.04, std: 6.631, max: 63.91, min: 3.107

MLSSA: Frequency Domain